

CALIFORNIA COASTAL COMMISSION

CENTRAL COAST DISTRICT OFFICE
725 FRONT STREET, SUITE 300
SANTA CRUZ, CA 95060
(831) 427-4863

F7a**RECORD PACKET COPY**

Filed: 8/13/04
180th day: 2/9/05
PSA 90 day ext: 5/10/05
Staff: K. Cuffe
Staff report: 3/30/05
Hearing date: 4/15/05

COASTAL DEVELOPMENT PERMIT APPLICATION

Application number3-04-030, Pebble Beach Golf Links, 5th Tee and 5th Green Seawalls

Applicant.....Pebble Beach Company; Cheryl Burrell

Project location.....Pebble Beach Golf Links 5th Hole, Pebble Beach (Monterey County).

Project descriptionTwo seawalls at base of the coastal bluff to protect the 5th Tee and 5th Green, using concrete reinforced with steel tiebacks and artificial stone fascia. 5th Tee seawall: 83 feet long, with 24 feet of buried wing walls, and height varying from 43 to 46 feet; sloping from base to top of bluff; and 5th green seawall: 160 feet long with 22 feet of buried wing walls, and height from 14 to 22 feet; vertical seawall to maximum height of 22 feet, with unprotected upper bluff backfilled and vegetated to recreate 2:1 slope.

Approvals ReceivedMonterey County Coastal Development Permit PLN030508 (CDP# 3-MCO-03-412) for emergency rip-rap; Coastal Commission CDP# 3-03-111-G (effective 12/10/03) for emergency rip-rap shoreline protection.

File documents.....CCC Coastal Development Permit file 3-04-030; and previous emergency permit 3-03-111-G.

Summary of Staff Recommendation:

Staff recommends that the Commission **approve, with conditions**, the proposed construction of two seawalls to protect the 5th Tee and 5th Green of the Pebble Beach Golf Links. The Pebble Beach Golf Links (PBGL) is an oceanfront golf course that lies along the shore of Stillwater Cove, just north of the City of Carmel-by-the-Sea. The 5th hole of the PBGL course is located along the blufftop between Stillwater Cove Pier and Arrowhead Point.

The 5th tee complex includes a pro tee located west of the ravine that separates the 4th and 5th holes, a main tee east of the ravine, and two other smaller tee areas, designed for shorter distance hitters (the forward tee), and for more challenging play (the upper tee). The tee boxes include stone retaining walls and buried piers for structural support of the teeing surface. The 5th green complex includes the green,



California Coastal Commission
April 2005 Meeting in Santa Barbara

Staff: K Cuffe Approved by: *[Signature]*

green surround and the bunker complex (sandtraps), and all surface and subsurface drainage improvements (curtain drains, trench drains, drop inlets and piping) that have been constructed to direct drainage off of the green and away from the bluff top.

The 5th Tee and Green seawalls will be constructed using reinforced concrete with steel tiebacks and artificial stone fascia, (concrete colored, texturized to match adjacent bluff face). As proposed, the 5th Tee seawall is 83 feet long, with 24 linear feet of buried wing walls, with a height varying from 43 to 46 feet. The 5th tee seawall will slope slightly to conform to the existing bluff face, and will extend all the way to the top of the bluff. The 5th green seawall is 160 feet long with 22 linear feet of buried wing walls, with a height that varies from 14 to 22 feet. The 5th green seawall will be constructed as a vertical seawall to maximum height of 22 feet, then backfilled and vegetated to recreate a 2:1 slope. Both seawalls will be keyed in to the underlying bedrock, located within 4 feet of the base of the bluff, and designed to minimize encroachment on the beach.

Although the 5th tee and green complexes, which range from 10 to 20 feet from the bluff edge, are not immediately threatened by ongoing average shoreline erosion rates of 0.6 to 0.7 feet per year, which could result in long-term erosion of 30 to 35 feet over the estimated 50-year economic life of the project, episodic erosion, which can cause as much as 15 to 20 feet of bluff recession in a single event, does put the tee and green structures in danger from erosion. Also, the bluff face is marginally stable, but under seismic loading or saturation from rainfall or seepage the slope is at risk from any future seismic or heavy rainfall event. Use of the vertical wall design, with tiebacks, would increase slope stability to an acceptable level.

As described by the applicant, alteration, relocation or loss of critical components of the 5th hole, such as elimination of the upper tee or portions of the 5th green is not feasible, and would negatively affect the unique, challenging shot provided by the configuration of the hole across the bluff, would result in a net reduction of total teeing area on a hole that already has a minimum of existing teeing area based on USGA guidelines, and would result in a significant negative impact on the quality, playability, and the rating (or difficulty) of the hole, thereby diminishing the aesthetic value and functionality of the golf hole.

Because of the extent of shoreline erosion that has occurred to date, and the potential for up 10 to 20 feet of erosion during a single event, evaluation of feasible project alternatives has found that non-structural alternatives alone will not be sufficient to protect the 5th tee complex and 5th green complex. The proposed seawalls appear to be the least environmentally damaging structural alternative, and have been designed to use stone fascia, which will be made of concrete colored and texturized to match adjacent bluff color, texture, and stratigraphy, and aesthetically blend into the surrounding area and so minimize potential visual impacts.

However, the project will reduce the sand supply that would otherwise serve the beach areas in the vicinity of the site, and will permanently fix the back of the beach so that ongoing shoreline erosion will, over time reduce the amount of beach that remains within Stillwater Cove. As a result of ongoing erosion along the PBGL shoreline, 14 previous permits have been approved by the County and Coastal



Commission for shoreline protective devices, including amendments or waivers to repair, replace or extend existing seawalls and revetment structures. As a result, approximately 17 percent of the PBGL shoreline is now armored. To mitigate for the cumulative impacts of additional shoreline armoring approved by this project, the permit has been conditioned to require a shoreline management plan for the Stillwater Cove area, and to monitor the seawalls, beach profiles, and nearshore habitat annually for the first five years, and then every five years for the life of the project to establish baseline conditions and measure changes as a result of the approved project. While the shoreline structures will improve bluff stabilization and protect recreational use of the golf course, the loss of beach area will negatively impact coastal access and reduce low-cost recreational opportunities in the area. To mitigate for loss of beach area, the project has also been conditioned to require a vertical accessway for public pedestrian access between Carmel Way and Carmel Beach at the southern end of the Pebble Beach Golf Links.

Staff Report Contents

1. Staff Recommendation on Coastal Development Permit.....	5
2. Conditions of Approval	5
A. Standard Conditions.....	5
B. Special Conditions	6
3. Recommended Findings and Declarations	16
A. General Project Location & Background.....	16
Background.....	16
B. Project Description.....	18
C. Previously Approved Project & Related Commission Actions	19
D. Standard of Review.....	21
E. Coastal Development Permit Determination - Issues Analysis	22
1. Geologic Hazards.....	22
a. Allowing Shoreline Structures.....	22
b. Regulatory Policies.....	22
c. Analysis of Consistency with Applicable Policies	23
A. Existing Structures.....	24
B. Danger from Erosion	25
C. Need for Shoreline Structure - Feasible Alternatives	29
D. Mitigation of Shoreline Sand Supply Impacts.....	34
E. Long Term Structural Stability and Assumption of Risk.....	44
d. Conclusion.....	46
2. Public Access and Recreation.....	46
a. Issue	46
b. Relevant Regulatory Policies.....	47
c. Analysis of Public Access and Recreation	48



d. Public Access Conclusion	52
3. Marine Resources and Environmentally Sensitive Habitats	52
a. Issue	52
b. Relevant Regulatory Policies.....	52
c. Analysis of Consistency with Applicable Policies	53
d. Conclusion.....	54
4. Visual Resources.....	55
a. Issue	55
b. Relevant Regulatory Policies.....	55
c. Analysis of Visual Resources	55
5. Archaeological Resources.....	56
6. California Environmental Quality Act (CEQA)	57

List of Tables

Table 1. Previously Approved Shoreline Projects in Pebble Beach Golf Links.

List of Exhibits

Exhibit	Title
Exhibit A	Regional Location Map
Exhibit B	Vicinity Map
Exhibit C	2001 Aerial Photo - Showing layout of Pebble Beach Golf Links in project vicinity (between Stillwater Cove and Pescadero Creek).
Exhibit D1	Early Assessors Parcel Map of Pebble Beach Area – showing original residential parcel and old 5 th hole alignment
Exhibit D2	Current Assessors Parcel Map – showing new residential lot configuration and new 5 th hole parcel (APN 008-403-003)
Exhibit E	Aerial Photos of Pebble Beach Golf Links 5 th Hole
Exhibit F	Staff photos of Existing Conditions at 5 th Tee and Green
Exhibit G	Proposed Site Plans and Elevations
Exhibit H	Visual Simulation of Coastal Bluff Before and After Proposed Seawalls
Exhibit I.1	2001 Aerial photo of site showing proposed construction route
Exhibit I.2	2001 Aerial photo of site showing approximate location of required Beach and Bluff Profiles
Exhibit J	Examples of Other Shoreline Protection Structures within the Project Vicinity
Exhibit K	Del Monte Forest LUP Map of Shoreline Access Areas



Exhibit	Title
Exhibit L	Del Monte Forest LUP Map of Recreational Facilities – showing trails
Exhibit M.1	2004 Oblique Aerial Photo of Pebble Beach Golf Links at 10 th Green, - showing recommended alignment for Carmel Beach Accessway along historic Redondo Trail.
Exhibit M.2	Aerial Photo Showing Approximate Location of Carmel Beach Accessway (Plan View)
Exhibit N	Staff photo of public recreational use of Redondo Trail to Carmel Beach
Exhibit O	Staff photos of public accessway and protective fencing at Ocean Colony Golf Course in Half Moon Bay.
Exhibit P	Public Correspondence Received Regarding the Project

1. Staff Recommendation on Coastal Development Permit

The staff recommends that the Commission, after public hearing, **approve** the proposed project subject to the standard and special conditions below. Staff recommends a YES vote on the following motion:

Motion: I move that the Commission approve Coastal Development Permit Number 3-04-030 subject to the conditions below and that the Commission adopt the following resolution:

Approval with Conditions. The Commission hereby grants a permit for the proposed development, as modified by the conditions below, on the grounds that the modified development is consistent with the requirements of Chapter 3 of the California Coastal Act of 1976 (Coastal Act), and will not prejudice the ability of the Monterey County to implement its certified local coastal program in conformance with Chapter 3 of the Coastal Act. The project is located between the sea and the first public road nearest the shoreline, is in conformance with the public access and recreation policies of the Coastal Act, and will not have any significant adverse effects on the environment within the meaning of the California Environmental Quality Act (CEQA).

A yes vote would result in approval of the project as modified by the conditions below. The motion passes only by affirmative vote of a majority of the Commissioners present.

2. Conditions of Approval

A. Standard Conditions

1. **Notice of Receipt and Acknowledgment.** The permit is not valid and development shall not commence until a copy of the permit, signed by the permittee or authorized agent, acknowledging receipt of the permit and acceptance of the terms and conditions, is returned to the Commission office.



2. **Expiration.** If development has not commenced, the permit will expire two years from the date on which the Commission voted on the application. Development shall be pursued in a diligent manner and completed in a reasonable period of time. Application for extension of the permit must be made prior to the expiration date.
3. **Interpretation.** Any questions of intent or interpretation of any condition will be resolved by the Executive Director or the Commission.
4. **Assignment.** The permit may be assigned to any qualified person, provided assignee files with the Commission an affidavit accepting all terms and conditions of the permit.
5. **Terms and Conditions Run with the Land.** These terms and conditions shall be perpetual, and it is the intention of the Commission and the permittee to bind all future owners and possessors of the subject property to the terms and conditions.

B. Special Conditions

1. **Final Plans.** PRIOR TO ISSUANCE OF THE COASTAL DEVELOPMENT PERMIT, permittee shall submit final engineered plans to the Executive Director for review and approval for the following:
 - A. **Final Site Plans.** Final plans shall show all components of project, including the extent of the project area (i.e., the extent of upland- and beach-based construction activities), and incorporate all geotechnical recommendations made in the geotechnical reports conducted for the project by Haro Kasunich and Associates (HKA 5/04, HKA 6/04, and HKA 8/04).
 - B. **Drainage Plans.** Drainage plans shall be submitted, for Executive Director review and approval, showing the location of all drainage features used at the 5th hole and that surface drainage patterns minimize surface runoff from draining over the blufftop.
 - C. **Landscape Plans.** Final landscape plans shall be submitted, for Executive Director review and approval, showing that the slope above the 5th green seawall will be revegetated with drought tolerant, non-invasive, native plant species suited for the site, including a minimum of 40 dune buckwheat plants. No irrigation of the bluff slope will be allowed, except for surface drip irrigation in order to establish natural growth.
2. **Geotechnical Review.** The project geotechnical engineer shall review all construction plans to ensure that geotechnical recommendations have been adequately incorporated into construction notes and plans. Evidence of the Geotechnical Engineer's review and approval of the plans shall be submitted to the Executive Director. At least once a week, the geotechnical engineer shall conduct an inspection during construction to ensure effective implementation of geotechnical recommendations.



3. Construction Management Plan. PRIOR TO ISSUANCE OF THE COASTAL DEVELOPMENT PERMIT, the applicant shall submit, for Executive Director Review and Approval, a Construction Management Plan, that shall include the following construction requirements, specified via written notes on the Plan. Minor adjustments to the following construction requirements may be allowed by the Executive Director if such adjustments: (1) are deemed necessary due to extenuating circumstances; and (2) will not adversely impact coastal resources.

- All work shall take place during daylight hours and lighting of the beach area is prohibited unless, due to extenuating circumstances, the Executive Director authorizes non-daylight work and/or beach area lighting.
- Construction work or equipment operations shall not be conducted below the mean high water line unless tidal waters have receded from the authorized work areas.
- When transiting on the beach, all construction vehicles shall follow the route shown on Exhibit I, remain as high on the upper beach as possible, and avoid contact with ocean waters and intertidal areas.
- All erosion and sediment controls shall be in place prior to the commencement of construction as well as at the end of each work day. At a minimum, silt fences, or equivalent apparatus, shall be installed at the perimeter of the construction site to prevent construction-related runoff and/or sediment from entering into the Pacific Ocean. Fencing may be used on the beach for erosion and sediment controls (e.g., a silt fence at the base of the bluff) as necessary to contain rock and/or sediments at the project site.
- All construction materials and equipment placed on the beach shall be stored beyond the reach of waves and extreme tides, shall be removed from the beach if necessary to avoid inundation, and shall allow for continuous lateral access along the beach. Materials that remain on the beach overnight must be located on the dry sand back beach area, as close to the toe of the bluff as possible. The extent of overnight storage areas shall be kept the minimum necessary. No fueling, or fuel storage shall be allowed on the beach at any time. Permittee shall be required to monitor weather forecasts and move all construction equipment and materials off of beach in advance of storm or extreme tidal events.
- Construction (including but not limited to construction activities, and materials and/or equipment storage) is prohibited outside of the defined construction, staging, and storage areas Shown on Exhibit I.
- No work shall occur on the beach during weekends or holidays unless, due to extenuating circumstances (such as tidal issues or other environmental concerns), and the Executive Director authorizes such work.



- All heavy equipment used for concrete pouring located on the coastal terrace shall be set at least 50 feet landward of the blufftop and shall use flexible hoses or articulated booms to deliver concrete to the project site. Other heavy equipment may be used periodically atop the coastal bluff, but shall be removed from the blufftop when not in use. All heavy equipment and project construction materials shall be stored in the construction staging areas shown on Exhibit I.
- Equipment washing, refueling, and/or servicing shall not take place on the beach, or within 100 feet of the shoreline.
- Petroleum products and other hazardous materials will be kept a distance of at least 100 feet from the shoreline and shall be stored offsite.
- The construction site shall maintain good construction site housekeeping controls and procedures (e.g., clean up all leaks, drips, and other spills immediately; keep materials covered and out of the rain (including covering exposed piles of soil and wastes); dispose of all wastes properly, place trash receptacles on site for that purpose, and cover open trash receptacles during wet weather; remove all construction debris from the beach).
- The Permittee shall notify planning staff of the Coastal Commission's Central Coast District Office at least 3 working days in advance of commencement of construction, and immediately upon completion of construction.
- All areas of beach disturbed by construction activities shall be restored to their original pre-construction condition.

4. Construction Site Documents and Construction Coordinator. DURING ALL PROJECT CONSTRUCTION ACTIVITIES:

- A. Construction Site Documents.** Copies of each of the following shall be maintained in a conspicuous location at the construction job site at all times (where such copies shall be available for public review) and all persons involved with the construction shall be briefed on the content and meaning of each prior to commencement of construction: (a) the signed coastal development permit; (b) the approved final plans; and (c) the approved construction management plan (see special condition 3); and
- B. Construction Coordinator.** A construction coordinator to be contacted during construction should questions arise regarding the construction (in case of both regular inquiries and in emergencies) shall be designated, and their contact information (i.e., address, phone numbers, etc.) including, at a minimum, a telephone number that will be made available 24 hours a day for the duration of construction, shall be conspicuously posted at the job site where such contact information is readily visible from public viewing areas, along with indication that the construction coordinator should be contacted in the case of questions regarding the construction



(in case of both regular inquiries and emergencies). The construction coordinator shall record the name, phone number, and nature of all complaints received regarding the construction, and shall investigate complaints and take remedial action, if necessary, within 24 hours of receipt of the complaint or inquiry.

- 5. Stillwater Cove Shoreline Management Plan.** WITHIN 2 YEARS OF PROJECT APPROVAL, permittee shall develop and submit, for Executive Director review and approval, a comprehensive Shoreline Management Plan for Stillwater Cove (between the 18th Tee northwest of Stillwater Pier to Arrowhead Point), that identifies where ongoing erosion is of concern, when and where non-structural actions (such as setbacks, relocation, landscape and drainage improvements) can be used to reduce risk from shoreline erosion, and under what situations shoreline protective structures may be necessary and the mitigation measures that would be most appropriate under different situations. The main purpose of the shoreline management plan shall be to evaluate all feasible alternatives in order to avoid further shoreline protective devices that might adversely affect coastal resources. Thus, the Stillwater Cove Shoreline Management Plan shall identify appropriate setback and relocation strategies for use under different situations.

The plan should include:

- a) Identify areas that are threatened by erosion in both short (1-2 years) and medium to longer terms (5 to 10 years). Assess specific sections of the coastline based on factors including, but not be limited to, geology and wave conditions and regional average annual erosion rates;
- b) Identify factors contributing to erosion at various locations, including areas where bluff top erosion could occur due to irrigation or drainage;
- c) Identify existing areas of armoring;
- d) Identify environmentally sensitive habitat areas where encroachment of structures is to be avoided;
- e) Specify requirements and guidelines for evaluating alternatives to avoid armoring, wherever possible. Identify options for relocating facilities or portions of facilities as alternatives to armoring when facilities are modified, renovated or reconstructed. Evaluation should include, but not be limited to, the use of technical evaluations of the site (geotechnical reports, engineering geology reports, etc.), the consideration of the type of and permanency of the feature along the shoreline in question (e.g., golf course fairway versus green), an examination of all other feasible options (removal, relocation, "do nothing", sand replenishment, etc);
- f) Where avoidance of armoring in such cases is not feasible, specify requirements and guidelines that set design parameters to minimize beach encroachment and adverse visual impacts. Include standard engineering plans defining the specific types of armoring which would be acceptable for specific areas, and where appropriate, identification of the types of armoring that should not be



considered for certain areas in order to minimize risks and adverse impacts to public access and scenic resources from the shoreline and adjacent recreational areas;

- g) Specify measures to address drainage and to ensure that irrigation does not contribute to erosion;
- h) Specify measures to protect access by the general public;
- i) Specify requirements for monitoring and maintenance of shoreline protection devices that may include discussion of mechanisms to ensure shoreline protection effectiveness and public safety with provisions for the removal of ineffective or hazardous protective structures, as well as programs to address beach replenishment and sand supply;
- j) Specify requirements to address emergency armoring, such as: procedures for field inspections before and after storm seasons; guidance for types of preferred temporary structures, and provisions for removal of temporary structures if no follow up permit is filed within 30 days; and
- k) Specify implementation requirements such as deed restrictions to assure long-term compliance with the terms of the Shoreline Management Plan.

6. Confirmation of Construction in Conformance with Approved Plans. The permittee shall submit a copy of as-built plans with the signature of the contractor and geotechnical engineer that confirms that the project has been constructed according to approved plans. Permittee shall also submit photo documentation of the project following completion.

7. Monitoring, Maintenance and Reporting Requirements. WITHIN 3 MONTHS OF COMPLETION OF CONSTRUCTION, the applicant shall submit, for Executive Director review and approval, a long-term monitoring and maintenance plan for the 5th hole seawalls. The Monitoring and Maintenance Plan shall be based on comparison with the as-built plans, and the applicant shall be responsible for carrying out the requirements of the plan, which shall include the following:

- A. Annual Beach and Bluff Profiles.** The permittee shall conduct topographic surveys of at least 10 beach and bluff profiles at Stillwater Cove (between Stillwater Pier and Arrowhead Point), as shown in Exhibit I2, twice annually (in March and August, to measure the winter and summer beach profile) for the first five years following construction, and then annually each summer. Profiles shall be spaced no more than 200 feet apart and shall be located so that they survey the topography in front of each seawall as well as within 20 feet of the up coast (north) and downcoast (south) end of each seawall. One profile shall also be located midway between the two seawalls, and three profiles shall be located between the Stillwater Cove pier and the 4th green. Reports shall be submitted to the Executive Director every year for the first five years, and then every five years, for the life of the structure, to identify changes to the beach width and volume following construction of the 5th tee and 5th green seawalls. Reports shall be submitted no later than March 30th of the following year. Surveys shall be conducted within a two-week window of previous years survey, to make comparisons of beach width under the same wave



climate and climatic conditions over time. Profiles shall be tied into survey monuments, constructed and surveyed in to establish fixed reference points from which any subsequent change can be recorded.

- B. Nearshore Habitat Monitoring.** A nearshore habitat monitoring plan shall be developed and implemented, to establish baseline conditions, and monitor any change in conditions over time in order to minimize impacts of any potential future beach nourishment projects in Stillwater Cove. The habitat monitoring shall be scheduled to coincide with beach and bluff monitoring, with similar reporting requirements.
- C. Long-Term Seawall and Bluff Monitoring.** The permittee shall monitor the physical condition of the new seawalls and adjacent bluffs annually, with reports submitted to the Executive Director every five years, for the life of the structure, to evaluate ongoing bluff erosion, and identify any needed maintenance.
- D. Future Seawall Maintenance.** This permit allows future seawall maintenance that involves recoloring of the seawall surface (which may need to be done periodically), minor refacing (e.g., patching, texturizing and repair of areas less than 100 sf) or replanting of native vegetation, as long as it does not require heavy equipment on the beach or have the potential to impact sensitive coastal resources. All other such work may require an amendment of this permit, unless the Executive Director determines that no such amendment is necessary.

8. Carmel Beach Access Improvements:

- A. Trail Improvement Plan.** PRIOR TO ISSUANCE OF THE COASTAL DEVELOPMENT PERMIT, the Permittee shall submit two sets of a Trail Improvement Plan (in both full-size and 11" x 17" formats with a graphic scale) to the Executive Director for review and approval. The Trail Improvement Plan shall provide for a signed, unobstructed public access trail for pedestrian/hiking use between Carmel Way and the sand at Carmel Beach, along the general alignment of the historic Redondo Trail connection between Del Monte Forest and the sandy beach. The Trail Improvement Plan shall, at a minimum, provide for all of the following:
 - 1. Trail Design.** The trail shall be aligned and designed to avoid interference with golf course play to the maximum degree feasible, and in substantial conformance with either of the alignments shown on Exhibits M1 and M2 (i.e., either along Alignment A - from Point A to Point C1, or, if possible through negotiations with the adjacent property owner, along Alternate Route B - from Point A to Point B and then to Point C2). Trail tread width may vary in relation to the grade of the terrain and other physical constraints, but shall be consistent with Monterey County LCP trail standards provided in the Del Monte Forest LUP. Any necessary stairway segments shall be a minimum of 4 feet wide between railings, and shall be built to general engineering and aesthetic standards for such shoreline stairways (including being designed to withstand storm events), consistent with LUP standards.



2. **Trail Surface.** The character of the trail is intended to remain a natural-surface hiking trail, except where aligned on existing paved surfaces.
3. **Pedestrian Safety.** The Trail Improvement Plan shall incorporate measures to protect trail users from errant golf balls. Appropriate design measures include, but are not limited to, installing the trail below the natural grade of the adjacent golf course (e.g., slightly down the side of the slope above Pescadero Creek), using short berms to separate golf play areas from trail, installing protective fencing or walls (including minor retaining walls as necessary), installing arbor-type overhead structures, installing appropriate native vegetation for screening the trail from adjacent recreational and residential uses, or a combination of such measures. In all cases, structures necessary for pedestrian safety shall include integral landscaping, shall be designed to soften views of any protective structures as seen from the trail and adjacent recreational and residential uses, and shall be installed consistent with LUP trail standards.
4. **Landscape Screening.** Plantings used for landscape screening shall be limited to native Monterey cypress and non-invasive species native to the lower Pescadero Creek area that are from local (to Pescadero Creek) stock, including locally collected propagules (seeds, cuttings, etc.) as available. In addition, any landscaping below the break in slope at Pescadero Creek itself shall also be riparian species. The plan shall be submitted with evidence that each species proposed meets these requirements (including written verification from a botanist or other landscape professional familiar with native plant species), and information on the proposed source for the plant materials. The plan shall clearly identify in plan view the number, type, size, extent and location of all non-invasive native plant materials to be used, and shall provide for a permanent irrigation system designed to ensure that the installed landscaping is successful.
5. **Signage.** The submitted Trail Improvement Plan shall identify the location, size, design and content of signs used, consistent with the following objectives. Signs shall be placed that clearly indicate that the trail is available for general public use. These signs shall, at a minimum, be located at both ends of the trail (i.e., at its intersection with Carmel Way, and at Carmel Beach) and every 300 feet along the trail, and shall be visible from both directions. The signs shall include the following text: "Public Accessway" (or equivalent, subject to review and approval by the Executive Director). At Carmel Way, a directional sign, at pedestrian scale, shall indicate the way to "Carmel Beach." Interpretive/educational signage describing the historic use of the Redondo Trail and its relationship to the Del Monte Forest Trail System shall be located along the trail. Additionally, signs describing hiker etiquette, and safety measures in relationship to the adjacent golf usage, may be allowed where necessary, or such language combined with directional or interpretive signage as necessary. All signs shall be adequately sized and placed as to allow them to be easily read by trail users, but not so they distract from the trail experience by being overly large or degrading views.



Signs shall be made up of materials and colors consistent with the trail character and Pescadero Creek aesthetic.

- B. Other Necessary Permits.** PRIOR TO TRAIL CONSTRUCTION, permittee shall obtain any other necessary approvals for development (e.g., Monterey County Planning Department).
- C. Trail Construction.** WITHIN TWO YEARS OF PERMIT APPROVAL, permittee shall complete reconstruction of the trail between Carmel Way and Carmel Beach in accordance with the approved Trail Improvement Plan. Construction may be accomplished in phases as necessary, provided that through access from Carmel Way to Carmel Beach is complete and open to public use within 2 years of approval of the project. All requirements of this condition and the approved Trail Improvement Plan are enforceable components of this coastal development permit. The Permittee shall undertake development in accordance with the approved Trail Improvement Plan. All components of the project shown in the approved Trail Improvement Plan shall be constructed and installed. Any proposed changes to the approved Trail Improvement Plan shall be reported to the Executive Director. No changes to the approved Trail Improvement Plan shall occur without a Commission amendment to this coastal development permit, unless the Executive Director determines that no amendment is necessary.
- D. Maintain Trail Improvements.** By acceptance of this permit, the Permittee acknowledges and agrees, on behalf of itself and all successors and assigns as follows:
1. **Public Use.** Trail use shall be limited to pedestrian/hiking use only (i.e., bicyclists, equestrians and motorized vehicles will not be allowed). The trail shall be available for general public use in perpetuity, and shall not be obstructed in any way, except that the Permittee shall have the right to temporarily close the trail (using signs and temporary fencing) during periods of major golf events at the Pebble Beach Golf Links (such as the AT&T Pebble Beach National Pro-Am and the U.S. Open Golf Championship) consistent with the 17-Mile Drive Public Use Agreement between Monterey County and the Pebble Beach Company..
 2. **Maintenance.** The Permittee shall maintain the trail, landscaping, irrigation, and all associated improvements shown on the approved Trail Improvement Plan (and any Coastal Commission amendments thereto) in a structurally sound manner and in their approved state in perpetuity. Vegetation growing on or adjacent to trail, that might obstruct use, shall be cleared at least once per year, or more often as necessary to maintain a minimum 4-foot cleared width at shoulder height.
 3. **Other Development Prohibited.** Development, as defined in Section 30106 ("Development") of the Coastal Act, shall be prohibited on the trail itself and/or within ten feet of the trail other than: (1) appropriately permitted construction activities associated with construction, maintenance, and/or repair of the trail, landscaping, irrigation, and associated structures shown on the approved Trail Improvement Plan; (2) development authorized by an amendment to this coastal development permit (such as minor additional protective



structures, directional and interpretive signage, etc.); (3) standard golf course maintenance, improvement, and repair measures, provided it doesn't obstruct general public access use of the trail, except for temporary closure during major golf events, consistent with Special Condition 8.D.(1) above; and (4) lawfully permitted restoration activities within the Pescadero Creek riparian corridor.

E. Revised Gate Handout. WITHIN SIX MONTHS OF TRAIL COMPLETION, the Permittee shall submit a revised Del Monte Forest gate handout to the Executive Director for review and approval. The revised gate handout shall be consistent with the requirements of all previous coastal development permits issued the Permittee, and consistent with the Monterey County certified Local Coastal Program. The revised handout shall clearly and accurately identify all public access amenities within Del Monte Forest (including all trails, parking areas, destinations, facilities, etc.), including the reconstructed trail from Carmel Way to the sand at Carmel Beach, at a scale and in a design that is easily understood. At the Permittee's discretion, the revised gate handout may be developed and submitted to the Executive Director as a separate public access insert to the gate handout provided it is clear that such insert is to be distributed (with the rest of the gate handout) to all coastal visitors entering Del Monte Forest.

9. Archaeological Resources. Should archaeological resources be discovered at the project site during any phase of construction, the permittee shall stop work until a mitigation plan, prepared by a qualified professional archaeologist and using accepted scientific techniques, is completed and implemented. Prior to implementation, the mitigation plan shall be submitted for review and approval by the State Historical Preservation Office and for review and approval by the Executive Director of the Coastal Commission. The plan shall provide for reasonable mitigation of the archaeological impacts resulting from the development of the site, and shall be fully implemented. A report verifying compliance with this condition shall be submitted to the Executive Director for review and approval, upon completion of the approved mitigation.

10. Other Agency Review and Approval. PRIOR TO ISSUANCE OF PERMIT, the permittee shall submit to the Executive Director evidence of project approval, or a statement that no review or approval is required from the following agencies:

A. CDFG Review. Permittee shall provide evidence that the California Department of Fish and Game (CDF&G) has reviewed the project for potential impacts to marine mammals, invertebrates, and seabirds in the area, or an indication that no review is required.

B. Conformance with Monterey Bay National Marine Sanctuary Requirements. Permittee shall submit to the Executive Director evidence that the Monterey Bay National Marine Sanctuary (MBNMS) has reviewed the project for potential impacts to resources or waters of the Monterey Bay National Marine Sanctuary and that the project conforms with any MBNMS requirements, or an indication that no such review is required.



C. Conformance with USACOE Requirements. Permittee shall submit to the Executive Director for review a copy of any USACOE permit issued for this project, letter of permission or evidence that no Corps permit is necessary.

11. Revisions and Amendments. The Permittee shall undertake development in accordance with the approved final plans identified in Special Condition 1. Any proposed changes to the approved final plans (including any changes in coverage or design) shall be reported to the Executive Director for review. No changes to the approved final plans shall occur without a Commission amendment to this coastal development permit unless the Executive Director determines that the change is immaterial or that no amendment is necessary.

12. Assumption of Risk, Waiver of Liability and Indemnity Agreement. The Permittee acknowledges and agrees, on behalf of itself and all successors and assigns: (i) that the site is subject to hazards from episodic and long-term bluff retreat and coastal erosion, tidal scour, wave and storm events, bluff and other geologic instability, and the interaction of same; (ii) to assume the risks to the Permittee and the property that is the subject of this permit of injury and damage from such hazards in connection with this permitted development; (iii) to unconditionally waive any claim of damage or liability against the Commission, its officers, agents, and employees for injury or damage from such hazards; (iv) to indemnify and hold harmless the Commission, its officers, agents, and employees with respect to the Commission's approval of the project against any and all liability, claims, demands, damages, costs (including costs and fees incurred in defense of such claims), expenses, and amounts paid in settlement arising from any injury or damage due to such hazards; and (v) that any adverse effects to property caused by the permitted project shall be fully the responsibility of the property owner.

13. Deed Restriction. PRIOR TO ISSUANCE OF THE COASTAL DEVELOPMENT PERMIT, the applicant shall submit to the Executive Director for review and approval, documentation demonstrating that the applicant has executed and recorded against the parcel governed by this permit a deed restriction, in a form and content acceptable to the Executive Director: (1) indicating that, pursuant to this permit, the California Coastal Commission has authorized development on the subject property, subject to terms and conditions that restrict the use and enjoyment of that property; and (2) has imposed the Special Conditions of this permit as covenants, conditions and restrictions on the use and enjoyment of the Property. The deed restriction shall include a legal description of the entire parcel or parcels governed by this permit. The deed restriction shall also indicate that, in the event of an extinguishment or termination of the deed restriction for any reason, the terms and conditions of this permit shall continue to restrict the use and enjoyment of the subject property so long as either this permit or the development it authorizes, or any part, modification, or amendment thereof, remains in existence on or with respect to the subject property.



3. Recommended Findings and Declarations

The Commission finds and declares as follows:

A. General Project Location & Background

Pebble Beach Golf Links (PBGL) is an oceanfront golf course along Carmel Bay in Stillwater Cove, between Pescadero Point and Pescadero Creek, just north of the City of Carmel-by-the-Sea (See Exhibits A, B and C). The shoreline in this area is composed of marine terrace deposits that sit atop fractured bedrock that form the coastal bluffs. Narrow, white sandy beaches front the bluffs, with sand elevations usually higher than 5 feet MSL (mean sea level); however, during large winter storms, the beach sand can be scoured down to bedrock and the base of the bluffs exposed to full wave attack. The coastal bluffs reach elevations of up to 48 to 50 feet above MSL. The Pebble Beach Beach Club is located immediately west of the Stillwater Cove Pier, and along with the 17th hole, occupies the western end of Stillwater Cove. The 5th Hole is on a 1.95-acre parcel, created by subdivision and lot line adjustment of an earlier 5.7-acre residential parcel, located between the Stillwater Cove Pier and Arrowhead Point. The hole is bordered by a ravine on the west (which separates it from the 4th hole), and a golf cart path and residential property to the north, a row of cypress trees that border the green at the eastern end of the hole, and the coastal bluff and beach along the south.

Background

The Pebble Beach Golf Links is an historic golf course, originally designed by Jack Neville and Douglass Grant in the early 20th Century. The Course was opened for play on February 22, 1919, and was ranked as the number one, publicly accessible course in the United States by Golf Digest in 2003-2004. According to the applicant, the area that is now the PBGL was originally considered for residential development. Some oceanfront lots had been sold before plans for developing the golf links were formalized. The Pebble Beach Company was able to purchase back some of the lots, but the owner of the 5.7 acre shorefront lot where the 5th Hole now sits, would not sell back the lot, and so the PBGL course was designed and developed around it (see Exhibit D). It was only recently, in 1998, that the Pebble Beach Company was able to acquire the lot, and relocate the 5th hole to the shoreline location originally envisioned, by subdividing the lot into 3 parcels (one shoreline parcel and two inland parcels) and moving residential development to the two new inland parcels (see Exhibit D).

The new 5th hole was designed by legendary golfer, Jack Nicklaus, in 1997 to match the original 1916 idea for an oceanfront hole, and to aesthetically fit into the natural landscape of the property. The 5th hole was then constructed in 1998, under a permit issued by Monterey County Planning and Building Inspection Department (965322; CDP# 3-MCO-97-103).

The 5th hole includes the tee complex, the fairway and the 5th green complex (see Exhibit E). The 5th tee complex includes a pro tee located west of the ravine, and a main tee east of the ravine. Two other smaller tee areas were also designed for shorter distance hitters (the forward tee), and for a more challenging shot (the upper tee). Individual tee boxes located adjacent to the ravine bluff were



constructed with 4 to 22-foot high retaining walls, supported with deep drilled piers where the walls are 10 feet or higher. The 5th green complex includes the green, green surround and the bunker complex (sandtraps), and all surface and subsurface drainage improvements (curtain drains, trench drains, drop inlets and piping) that have been constructed to direct drainage off of the green and away from the bluff top. The 5th hole is bordered on the inland side by a 10-foot wide cart path that borders the adjacent residential parcel to the east. The main tee box is located about 16 to 17 feet seaward of the cart path, with a grade break of about 3 to 4 feet in elevation, and so requires a set of about 5 steps to reach the tee.

Prior to development of the new 5th hole, there was concern about erosion along the ravine located between the 4th and 5th holes, and a geotechnical report was developed (by Haro, Kasunich & Associates, HKA, June 2, 1997) to provide engineering conclusions regarding the stability of the terrace deposits and underlying bedrock that make up the coastal bluff and drainage gully adjacent to the proposed new tee boxes, green, bunkers, private beach access stairway¹, golf cart bridge, cart path and necessary retaining walls. The geotechnical report indicated that slope stability analyses of the bluffs in the ravine area showed that the ravine slopes were stable under static loads, but could incur rotational failures under seismic or saturated conditions, and so recommended deep drilled piers and piles for the pedestrian bridge and tee box retaining walls 10 foot or higher.

The HKA 6/97 report stated that ongoing coastal erosion of the oceanfront bluffs was a concern at the time, noting recent rotational landsliding had occurred, but indicated that the existing damaged stairs would be demolished and grading would help to improve the stability of the edge of the unstable coastal bluffs. The report also noted that surface and subsurface drainage improvements and erosion control landscaping were also incorporated into the grading plan, and that with such efforts, "the immediate use of seawall[s] and retaining walls along the coastal bluff will be avoided." Surface drainage improvements included curbs along the golf cart path, and catch basins located along the fairway, with discharge over the bluff "in a controlled manner." Subsurface drainage improvements included lateral hydroaugers in the bluff where seepage and slumping had occurred (east of the stairway under the green), and vertical trench drains within and below the green and bunker complex (with approximately 270 linear feet of subdrain trench constructed under the green and toward the west side of the fairway approach). No other information was given in the HKA 6/97 report on long-term shoreline erosion rates, or on an estimate of how long new development would be safe from on-going shoreline erosion in this location. In the County's coastal development permit for the project (PLN965322; CCC permit tracking number 3-MCO-97-103, the county adopted a finding (finding 15) that the project was consistent with LCP policies dealing with development in hazardous areas.

Notwithstanding conclusions of the earlier geotechnical conclusions that "the immediate use of seawalls and retaining walls along the coastal bluff" would be avoided, and drainage improvements and erosion control efforts undertaken during construction of the new 5th hole, ongoing coastal erosion has occurred along the coastal bluffs beneath the 5th tee and green. Strong winter storms in December 2002 and January 2003 scoured beach sands to bedrock and allowed direct wave attack against the base of the

¹ Which, according to the applicant were to remain for private use based on a clause in the purchase agreement reached between the Pebble Beach Company and the residents.



coastal bluff, which has accelerated erosion of the bluff and over steepened the slope beneath the 5th tee, and has undermined the area below the 5th green. In January 2004, a heavy rainstorm event caused a 1 to 3-foot thick debris flow type landslide to occur outboard of the 5th tee, resulting in undercutting of a tree stump along the edge of the bluff, within about 15 feet of the upper tee. Wave attack from the December and January storms was also the primary cause of slump sliding and the formation of a broad slide scarp directly below the 5th green. Because of the geologic structure of the area, secondary causes of sliding in the 5th green area were found to be groundwater seepage and saturated soils from perched groundwater retained at the top of the bedrock contact.

As a result of the landslide at the 5th green, an emergency permit (CDP# 3-03-111-G) was granted by the Coastal Commission to place temporary rip-rap revetment against the base of the bluff, and to spray a thin layer of shotcrete to cover the eroded gully created by the landslide in order to protect the green and prevent further erosion of exposed, unconsolidated terrace deposits in the upper bluff. The applicant is thus proposing the current project as a follow up to this emergency permit, and to respond to the ongoing coastal erosion experienced at this location.

B. Project Description

The Pebble Beach Company (PBCo) proposes to construct two seawalls at the base of the coastal bluffs below the 5th hole of the Pebble Beach Golf Links to prevent these areas from being undermined due to coastal erosion/bluff recession. One seawall would be located below the 5th tee complex, and one below the 5th green (see Exhibits G and H).

The 5th tee seawall, as proposed, would be 83 feet long, with an additional 24 linear feet of buried wing walls, and would vary from 43 to 46 feet in height. The seawall would be keyed into the bedrock, and set against the existing slope as much as possible, extending from base to top of the bluff.

The 5th green seawall, as proposed, would be 160 feet long with an additional 22 linear feet of buried wing walls, and would vary from 14 to 22 feet in height. The 5th green seawall would be a vertical seawall, keyed into the bedrock, and set within 4 feet of the base of the bluff. The vertical seawall would be backfilled with concrete to a height just below the top of bedrock, then gravel for drainage, and then backfilled with engineered soil, and landscaped using native plants and grasses to recreate a vegetated 2:1 slope (see Exhibit H).

Both seawalls would be constructed using reinforced concrete with steel tiebacks and would be covered with artificial stone fascia, made from colored, texturized concrete designed to match and blend with the adjacent geologic strata. Gravel and piping will be incorporated into the design to allow drainage of the overlying marine terrace deposits. The drain outfalls would be hidden under the stone fascia, beneath an overhanging ledge designed into the face of the seawall.

The applicant acknowledges that as designed, the 5th green seawall may still experience overtopping due to wave run-up or exposure of the slope to rainfall, and so foresees the likelihood that the project would require ongoing monitoring and future repair. The project also incorporates existing surface and



subsurface drainage improvements, erosion control measures and ongoing turf management at the 5th hole, to minimize surface and subsurface water discharge and erosion. The integrated pest management program uses drought, insect and disease resistant grasses and monitors turf conditions regularly to minimize water, pesticide and fertilizer use on the golf course, as well as irrigation and drainage strategies that direct water away from the bluff face. Finally, the design and location of the buried wing walls are also intended to minimize the need for expansion due to potential erosional outflanking.

C. Previously Approved Project & Related Commission Actions

Various permit and amendment descriptions related to this project, as well as other shoreline protection structures in the Pebble Beach Golf Links, including CDP numbers and dates of approval, are listed in Table 1. The Commission and the County have conditioned the previous permits and amendments in order to address coastal hazards, and to protect marine resources, visual resources, water quality, environmentally sensitive habitats, and public recreation and coastal access.

Table 1. Previously Approved Shoreline Projects in Pebble Beach Golf Links.

Permit Number	Name	Comments
Monterey County Permit 965322 (CDP# 3-MCO-97-094) (MS approval 10/9/97) (APN 008-401-021, -020, & 008-393-011)	Pebble Beach Company – Minor Subdivision of 6.5 acre parcel (Jenkins parcel)	Subdivision to allow division of 5.7- acre parcel into two inland parcels of 1.85 acres and 1.87 acres, and an oceanfront parcel of 1.95 acres.
Monterey County Permit 965322 (CDP# 3-MCO-97-103) (PC approval 11/19/97) (APN 008-401-021)	Pebble Beach Company - Pebble Beach Golf Links New 5 th Hole	Permit to relocate the 5 th hole from inland location to newly subdivided 1.95-acre oceanfront parcel; demo/ removal of existing residential dwellings, relocation of log cabin, grading for new 5 th hole, new bridge over ravine, private beach access stairway, bluff stabilization with surface and subsurface drainage improvements, slope recontouring, erosion control matting and revegetation; construction of stone retaining walls for tee boxes.



Permit Number	Name	Comments
Monterey County Permit 030508 (CDP# 3-MCO-03-412) (approved 10/28/03) (AP 008-401-020, 008-401-021)	Pebble Beach Company – Monterey County Emergency Permit for 5 th Hole Revetment	County permit for emergency work – later identified that it needed Coastal Commission permit
CDP# 3-03-111-G (approved 12/10/03) (AP 008-401-020, 008-401-021)	Pebble Beach Company - CCC - 5 th Hole Emergency Rip-Rap Revetment	Emergency permit to place temporary rip-rap and shotcrete cove in eroded gully adjacent the the 5 th green
CDP# 3-83-197 (approved 10/12/83) (APN 008-401-020, 008-411- 019, 008-411-020)	Pebble Beach Company - PBGL 17 th green, 18 th tee	Five different shoreline and bluff stabilization projects along Stillwater Cove shoreline including 400-450 tons of rock fill, and 500 linear feet of concrete wall
CDP# 3-83-197-A1 (re-filed as 3-85-25) (approved 5/9/85) (APN 008-401-020, 008-411- 019, 008-411-020)	Pebble Beach Company – Beach Club	Amended permit to include repair and protection of undermined clubhouse footings with 15 tons poured concrete & 30 tons of rock revetment – required demo of pier and installation of beach access ramp/stairway
CDP# 3-83-197-A2 (approved 3/25/87) (AP 008-381-009, 008-393-011, 008-401-020, 008-411-019)	Pebble Beach Company – 4 th fairway & 18 th fairway	Coastal bluff stabilization – extends shoreline protection by construction of 1,250 ft of concrete fabriform & rock face shoreline structure (at four locations along 4 th fairway
CDP# 3-83-197-A3 Immaterial amendment (approved 10/10/96) (AP 008-401-020, 008-411-019, 008-411-020)	Pebble Beach Company – 17 th green/18 th tee and 18 th green	Amended to plug four areas of permitted wall along 17 th green & 18 th tee with concrete, regrout and fill voids of adjacent pre-existing wall along 18 th green with concrete.
CDP# 3-83-197-A4 Immaterial amendment (approved 2/6/97) (AP 008-401-020, 008-411-019, 008-411-020)	Pebble Beach Company – 17 th green and 18 th tee	Repair, replacement and extension of existing seawalls, reconfiguration of existing rip-rap revetment structures and ongoing maintenance as required
CDP #3-96-091-DM (approved 8/15/96) (APN 008-411-020)	Pebble Beach Company – Beach Club seawall repairs	Repairs to existing rip-rap rock revetment
CDP # 3-96-101-DM (approved 9/13/96) (APN 008-381-009)	Pebble Beach Company – PBGL 9 th & 10 th holes	Excavate approximately 8 exploratory test pits at base of coastal bluff enar 9 th and 10 th greens.



Permit Number	Name	Comments
Monterey County #PLN970461 (CDP #3-MCO-98-072) (approved 3/25/98) (APN 008-381-009)	Pebble Beach Company – PBGL 9 th and 10 th Holes	Four bluff protection structures/ seawalls. Two at 9 th green: 10-ft high, 182-ft long upper retaining wall; and 277-ft long lower seawall with artificial rockwork surface. Two at 10 th green: 10-ft high, 248-ft long upper retaining wall; and 288-ft long lower seawall with artificial rockwork surface.
CDP # 3-98-060-DM (approved 7/9/98) (APN 008-381-009)	Pebble Beach Company – PBGL 9 th and 10 th holes	Equipment operations on approx. 30,000 sf area of beach as needed to support bluff stabilization efforts at 9 th and 10 th holes
CDP# 3-05-003-G (approved 1/20/05) (APN 008-411-019)	Pebble Beach Company – PBGL 18 th hole fairway	Emergency replacement of failed rock revetment (approximately 35-40 feet in length along 18 th fairway) with temporary vertical seawall constructed of plywood sheeting, helical screws and colored, textured shotcrete facing.

D. Standard of Review

Regulatory jurisdiction for lands above the ambulatory mean high tide line were granted to Monterey County in 1988 following certification of the Monterey County Local Coastal Program. The Commission, however, retains jurisdiction below the ambulatory mean high tide elevation, in public trust lands, and areas of deferred certification.

While much of the proposed seawalls extend above the mean high tide line, the foundation for both seawalls lies below mean high tide elevation. Since the foundation of each seawall is a main component that supports the rest of the wall, the entire wall and backfilled slope are thus considered to be within the Coastal Commission's original jurisdiction. The standard of review for new development in the Commission's original jurisdiction area is the Coastal Act. The Monterey County certified LCP, which includes the Del Monte Forest Land Use Plan (LUP) and Coastal Implementation Plan (CIP), also has specific requirements for the Pebble Beach Area. While not the standard of review in this case, the Monterey County LCP, and specifically policies and regulations included in the Del Monte Forest LUP and CIP, may serve as guidance for development in this area of Pebble Beach.



E. Coastal Development Permit Determination - Issues Analysis

1. Geologic Hazards

a. Allowing Shoreline Structures

Pebble Beach Company has applied for seawalls to protect the 5th Hole tee and green of the Pebble Beach Golf Links (PBGL) golf course due to erosion threats. The coastal bluff that fronts the 5th Hole has eroded due to wave attack during heavy winter storms that has scoured away beach sand, undermined the bluff, and caused landsliding and over-steepening of the bluff face. As a result, the bluff beneath the 5th tee complex is undercut and susceptible to episodic failure, and the bluff beneath the 5th green complex is currently protected with temporary riprap revetment and shotcrete due to recent landsliding. Coastal erosion, which is expected to continue, has now put the 5th tee complex and 5th green complex at risk from ongoing shoreline erosion and subsequent bluff recession.

b. Regulatory Policies

Among other things, Coastal Act Section 30233(a) lists the type of development that is allowed to fill open coastal waters (as is proposed here). Section 30233(a) states:

Section 30233(a). The diking, filling, or dredging of open coastal waters, wetlands, estuaries, and lakes shall be permitted in accordance with other applicable provisions of this division, where there is no feasible less environmentally damaging alternative, and where feasible mitigation measures have been provided to minimize adverse environmental effects, and shall be limited to the following:

- (1) New or expanded port, energy, and coastal-dependent industrial facilities, including commercial fishing facilities.*
- (2) Maintaining existing, or restoring previously dredged, depths in existing navigational channels, turning basins, vessel berthing and mooring areas, and boat launching ramps.*
- (3) In wetland areas only, entrance channels for new or expanded boating facilities; and in a degraded wetland, identified by the Department of Fish and Game pursuant to subdivision (b) of Section 30411, for boating facilities if, in conjunction with such boating facilities, a substantial portion of the degraded wetland is restored and maintained as a biologically productive wetland. The size of the wetland area used for boating facilities, including berthing space, turning basins, necessary navigation channels, and any necessary support service facilities, shall not exceed 25 percent of the degraded wetland.*
- (4) In open coastal waters, other than wetlands, including streams, estuaries, and lakes, new or expanded boating facilities and the placement of structural pilings for public recreational piers that provide public access and recreational opportunities.*
- (5) Incidental public service purposes, including but not limited to, burying cables and pipes or inspection of piers and maintenance of existing intake and outfall lines.*



- (6) Mineral extraction, including sand for restoring beaches, except in environmentally sensitive areas.
- (7) Restoration purposes.
- (8) Nature study, aquaculture, or similar resource dependent activities.

Coastal Act Section 30235 addresses the use of shoreline protective devices:

30235. Revetments, breakwaters, groins, harbor channels, seawalls, cliff retaining walls, and other such construction that alters natural shoreline processes shall be permitted when required to serve coastal-dependent uses or to protect existing structures or public beaches in danger from erosion, and when designed to eliminate or mitigate adverse impacts on local shoreline sand supply. Existing marine structures causing water stagnation contributing to pollution problems and fish kills should be phased out or upgraded where feasible.

Coastal Act Section 30253 addresses the need to ensure long-term structural integrity, minimize future risk, and to avoid landform altering protective measures in the future. Section 30253 provides, in applicable part:

Section 30253. New development shall:

- (1) Minimize risks to life and property in areas of high geologic, flood, and fire hazard.
- (2) Assure stability and structural integrity, and neither create nor contribute significantly to erosion, geologic instability, or destruction of the site or surrounding area or in any way require the construction of protective devices that would substantially alter natural landforms along bluffs and cliffs.

c. Analysis of Consistency with Applicable Policies

1. Filling Coastal Waters

The 5th hole seawalls require fill below the mean high tide line (i.e., fill of coastal waters) in order to key the structures into bedrock. Section 30233 of the Coastal Act identifies eight allowable uses for the dredging, diking, and filling of coastal waters; seawalls are not one of the listed uses. As a result, seawalls are prohibited in coastal waters by Section 30233(a). However, Section 30235 of the Coastal Act requires the Commission to approve a seawall if it is necessary to protect an existing structure and if it meets the other requirements of that section. Section 30235 clearly anticipates dredging, diking, and filling of coastal waters for seawalls and is a more specific policy than Section 30233(a) in this regard. Thus, Section 30235 of the Coastal Act requires the Commission to approve seawalls in certain circumstances, even though such activities may not comply with the allowable-use test of Section



30233(a) of the Coastal Act. To the extent Section 30235 requires that the Commission approve this project, the more specific direction of Section 30235 would override in this case.²

2. Allowing Shoreline Armoring

Coastal Act Section 30235 acknowledges that seawalls, revetments, cliff retaining walls, groins and other such structural or "hard" methods designed to forestall erosion also alter natural landforms and natural shoreline processes. Accordingly, with the exception of new coastal-dependent uses, Section 30235 limits the construction of shoreline protective works to those required to serve coastal-dependant uses, or to protect existing structures or public beaches in danger from erosion, provided they are designed to eliminate or mitigate adverse impacts on shoreline sand supply. The Coastal Act provides these limitations because shoreline structures can have a variety of negative impacts on coastal resources including adverse affects on sand supply, public access, coastal views, alteration of natural landforms and overall shoreline beach dynamics on and off site which may ultimately result in the loss of public beach. The Commission must always consider the specifics of each individual project, but prefers to see alternatives that avoid the necessity for shoreline structures that armor the shoreline and alter the natural dynamics.

The Applicant proposes shoreline armoring on approximately 243 linear feet of the coastal bluff that fronts the 5th tee complex (83-foot long seawall) and 5th green complex (160-foot long seawall) to protect existing structures threatened by erosion, that are integral parts of the Pebble Beach golf Links (PBGL) golf course. The site supports coastal recreational uses by providing a publicly accessible golf course and beach access to and along Stillwater Cove.

A. Existing Structures

Two seawalls are being proposed to reduce shoreline erosion that threatens critical elements of the 5th tee and 5th green. The 5th tee complex includes (1) the Championship Tee, adjacent to the 4th green on the west side of the ravine adjacent to the 4th green, (2) the Main Tee, (3) the Upper Tee, used for a more challenging strategic golf shot, and (4) the Forward Tee, used by golfers playing the course at a shorter distance to match their skill level. In order to create a flat playing area and to protect these tee boxes from potential erosion along the ravine, some of these tee boxes were constructed with stone retaining walls on deeply set pier structures when the 5th hole was originally built.

The 5th Green complex includes the green, green surround and bunkers (sand traps) and drainage improvements (e.g., trench drains, lateral hydroaugers, vertical sheet drains, drop inlets and drain piping). The 5th tee complex and 5th green complex are integral components of the 5th hole, and of the

² Note that other coastal resource issues associated with such fill are addressed in subsequent findings. Note too that the requirements of Section 30233(a) as regards mitigating impacts and identifying the least environmentally damaging feasible alternative would still apply. The intent of this finding is to explain the distinction between Sections 30233(a) and 30235 as it relates to seawalls occupying coastal waters. Giving precedence to the more particular provisions of Section 30235 over the more general provisions of sections 30233(a) is in accord with generally applicable principles of California law. See, for example, Civil Code Section 3534 ("Particular expressions qualify those which are general").



larger PBGL golf course, which includes substantial development and infrastructure, including grading, landscaping, roads, walkways, cart paths, and drainage and irrigation improvements. As such, the 5th tee and 5th green complexes are considered existing structures for purposes of Coastal Act Section 30235.

B. Danger from Erosion

The Coastal Act allows shoreline armoring to protect existing structures in danger from erosion, but it does not define the term "in danger." There is a certain amount of risk in maintaining development along a California coastline that is actively eroding and can be directly subject to violent storms, large waves, flooding, earthquakes, and other hazards. Within the PBGL coastal environment, shoreline erosion, both long-term and episodic, can result from winter storm waves, which first cause beach scour, removing sand to the bedrock, and then basal bluff attack, which serves to undermine and over-steepen the bluff face, causing landsliding or collapse of the geologic materials that make up the bluff. Such risks can be exacerbated by other factors such as sea level rise and localized geography that can focus storm or tidal energy along particular stretches of coastline. As a result, some would say that all development along the immediate California coastline is in a certain amount of "danger." It is a matter of the degree of threat that distinguishes between danger that represents an ordinary and acceptable risk, and danger that requires shoreline armoring per 30235. Lacking Coastal Act definition, the Commission's long practice has been to evaluate the immediacy of any threat in order to make determinations as to whether an existing structure is "in danger." While each case is evaluated based upon its own particular set of facts, the Commission has generally interpreted "in danger" to mean that an existing structure would be unsafe to occupy or use within the next two or three storm season cycles (generally, the next few years) if nothing were to be done (i.e., in the no project alternative).

The Applicant has submitted the following geotechnical evidence to support the allegation that the existing structures are in danger from erosion:

- *Geotechnical Engineering Study for Pebble Beach Golf Links New Fifth Hole*, prepared for Pebble Beach Company by Haro, Kasunich & Associates Inc., dated June 1997 (HKA 6/97);
- *Coastal Protection Alternatives Evaluation, Pebble Beach Golf Links 5th Green and Tee*, prepared for Pebble Beach Company by Haro, Kasunich & Associates Inc., dated May 5, 2004 (HKA 5/04);
- *Supplemental Geotechnical Investigation for Coastal Bluff Repair, Pebble Beach Golf Links Fifth Hole Tee and Green*, prepared for Pebble Beach Company by Haro, Kasunich & Associates Inc., dated June 2004 (HKA 6/04);
- *Letter Report regarding Pebble Beach Golf Links 5th Tee and 5th Green Coastal Bluff Protection* (sent in response to Filing Status Letter), prepared for Pebble Beach Company by Haro, Kasunich & Associates Inc., dated August 10, 2004 (HKA 8/04);



The Applicant's geotechnical consultants and engineers conclude that the 5th Tee complex and 5th Green complex are in danger from erosion as that term is understood in the Act. The Forward Tee and Upper Tee are the areas that are at immediate risk from continued shoreline erosion and bluff recession in the area of the 5th Tee complex. The HKA 5/04 report states that bluff recession would result in the irreparable loss of tee area that is critical to golf play at this internationally known public golf course. The 5th green complex is also at risk from continued shoreline erosion, and currently has temporary shoreline protection (rip-rap revetment and shotcrete slope) due to the most recent landsliding that occurred this last winter (December 2003 and January 2004).

The geologic setting of the PBGL 5th Hole is described in the original and supplemental geotechnical reports prepared for the project by Haro, Kasunich and Associates (HKA 6/97, and HKA 6/04). According to the HKA 6/04 report, the coastal bluff adjacent to the 5th Hole tee is about 46 to 48 feet high near the 5th tee complex, and about 40 to 44 feet high near the 5th green complex. The coastal bluff is comprised of near vertical sandstone with cemented conglomerate bedrock at the base of the bluff, extending from the toe at about 2 feet MSL up to about 13 feet MSL, and approximately 30 to 35 feet of terrace deposits which overlie the bedrock. The terrace deposits are made up primarily of clayey sand.

At the 5th tee complex, terrace deposits overlie the bedrock with an average slope inclination of about 55 degrees. Due to wave erosion at the toe, the bluff face at the 5th tee complex is over-steepened. As the toe of the bluff is eroded the bluff top recedes. At the 5th green complex, the bedrock face is near vertical with terrace deposits above sloping at about an average gradient of 35 degrees. Perched groundwater has also been observed above the bedrock contact, saturating the terrace deposits from an elevation of about 11 feet MSL up to about 18 feet MSL. Groundwater levels may fluctuate due to variations in rainfall and other factors.

The normal tidal range at the site is -2.3 to +2.7 MSL, however, the maximum tidal range is from -4.5 feet MSL to +4.0 feet MSL. Mean high tide level is 1.6 feet MSL. The geotechnical report indicates that water has overtopped the bluff during extreme wave run-up conditions, based on evidence of seaweed and debris on the blufftop near the 5th green.

Shoreline Erosion & Change

Coastal geologists from the US. Geological Survey have looked at historical aerial photos of beaches along the Monterey Peninsula, including Stillwater Cove, as part of a larger study of coastal processes and sediment transport along the Monterey Peninsula. Their results are summarized in the paper titled "*Sediment distribution and transport along a rocky embayed coast; Monterey Peninsula and Carmel Bay, California*" by Curt Storlazzi and Mike Field, dated 2000.³ The Storlazzi and Field 2000 study looked at historical aerial photos of beaches along the Monterey Peninsula, including Stillwater Cove. The Storlazzi and Field 2000 study measured beach width from aerial photos dated 1949, 1970 and 1990 and determined that, similar to most beaches along the Monterey Peninsula, the width of the beach at Stillwater Cove has been reduced since the late 1940's. While the report does not include tabulated data,

³ Storlazzi, C.D., and Field, M.E.2000. *Sediment distribution and transport along a rocky embayed coast: Monterey Peninsula and Carmel Bay, California*. Marine Geology: V170 (2000) pp. 289-316.



Figure 3 of the report shows a loss of about 10 meters (about 33 feet) in just over 40 years (or about 0.82 feet per year), which, over a 50-year economic lifespan, would represent a bluff retreat of about 40 feet.

HKA has actually monitored shoreline erosion and bluff recession at the 5th hole from 1998, when the 5th hole was originally constructed, to the present time. When the new 5th hole was constructed, the HKA 6/97 geotechnical report concluded that while it was necessary to use retaining walls along the ravine slopes, with incorporation of drainage improvements and erosion control landscaping, the immediate use of seawalls and retaining walls along the coastal bluff would be avoided.

More recently, the HKA 5/04 report found that the annual bluff recession rate at the 5th tee is about 0.7 feet per year, while that at the 5th green was found to be about 0.6 feet per year. (These figures, while close, are a bit more conservative than the erosion rate identified by Storlazzi and Field 2000). The HKA 5/04 report found that bluff erosion at the 5th tee complex is caused by both episodic and steady erosion, while bluff erosion at the 5th green has been more a result of episodic rather than steady erosion. The HKA 5/04 report states that, based on the bluff erosion rates noted above, about 35 feet of bluff recession at the 5th tee, and about 30 feet of bluff recession at the 5th green could occur within 50 years. The report also notes that 15 to 20 feet of blufftop recession could occur in one event due to episodic failure of the bluff face (these figures are based on the slope stability analyses, discussed below). Currently, the Upper Tee and Forward Tees of the 5th tee complex are within 10 feet of the top of the bluff; and portions of the 5th green are within 10 to 20 feet of the top of the bluff. The top of the bluff near the upper tee is undercut about 5 to 8 feet, making the upper tee a hazard to both bluff top and beach users. After winter rains this last year, a debris flow landslide occurred on the bluff face beneath the 5th tee. Also, as a result of the December 03, January 04 storms a large landslide occurred near the 5th green, leaving portions of the green now within 20 feet of the upper landslide scarp. According to the HKA 5/04 report, the landslide at the 5th green occurred in an area where the bedrock is fractured and so more susceptible to erosion than other non-fractured areas of bedrock; they also noted that this area is one of the areas that is eroding most quickly. Based on measurements taken from project plans, the top of the bluff near the 5th green is about 8 feet from the erosional gulley created by the 2004 landslide and within about 5 feet of the upper scarp of a smaller, more recent surficial slide (see photos in Exhibit F). Bunkers that surround the green are also within about 5 feet of the top of the bluff.

While, as the name implies, the predominant conditions at Stillwater Cove are calm, winter wave conditions can entirely scour beach sands from the base of the coastal bluffs that back the beach in front of the 5th hole, and allow wave attack to erode the base of the bluff, over-steepening the bluff and causing bluff recession and landslides, especially in areas where fractured bedrock exists. While bluff erosion rates of 0.6 to 0.7 feet per year have been measured, which do not by themselves put the tee and green structures in danger currently, episodic bluff erosion of 15 to 20 feet in one event could also occur. Since elements of the 5th tee and green are located within 10 to 20 feet of the bluff, potential episodic events could cause substantial erosion of these areas, and create hazardous geologic conditions (including additional debris flows along the bluff face or mass failure of the bluff) along the 5th hole.



Slope Stability

Long term shoreline erosion and episodic mass wasting events (sloughing, landslides, etc) have the capacity to place structures on bluffs at risk. Measuring the degree of threat thus also requires evaluating the stability of the bluff materials themselves and their ability to resist failure.

A landslide occurs because a number of factors come together; these include the overall geometry of the hillside (or bluff), decreases in the effective normal stress at depth caused by increased water in the slope (buoyancy forces); and the strength of the bluff materials themselves. Landslides on coastal bluffs occur at least partly because marine erosion continually undermines the toe of the bluff, creating an unsupported geometry that is prone to landsliding. The risk of landslide can be quantified, to some extent, by taking the forces resisting a landslide (principally the strength of the materials along a potential slide plane) and dividing them by the forces driving a landslide (principally the weight of the materials as projected onto the potential slide plane). If the quotient, called the factor of safety, is 1.0, failure is imminent. The factor of safety should never, in theory, be below 1.0, as a slide would have already occurred. Factors of safety greater than 1.0 lead to increasing confidence that the bluff is safe from failure.

Slope stability can be evaluated quantitatively by a "slope stability analysis." In practice, hundreds of potential slide planes are typically evaluated. The one with the lowest factor of safety is the one on which failure will occur. So the potential slide plane with the minimum factor of safety is the appropriate one to design for. If one steps back far enough from the edge of the bluff, potential slide planes intersecting the top of the bluff generally will have higher and higher factors of safety. A factor of safety of greater than or equal to 1.5 is the industry standard for new development to be "safe" from a landslide under static conditions. During an earthquake, additional forces act on the bluff, and a landslide is more likely. To test for the stability during an earthquake, a "pseudostatic" slope stability analysis can be performed. This analysis is rather crude, but the standard methodology is to apply a "seismic coefficient" of 15% of the force of gravity (0.15g), the force of which is added to the forces driving the landslide. The standard for new development in California is to assure a minimum factor of safety greater than or equal to 1.1 in the pseudo-static case. The HKA 6/04 supplemental report makes use of a somewhat more sophisticated approach that takes into account topographic amplification of ground shaking at cliff edges.

As described above, the geology at this location consists of unconsolidated clayey sands that rest on top of cemented sandstone and conglomerate. The HKA 6/04 supplemental geotechnical report provides results of slope stability analyses conducted for the 5th tee complex, and found that under static (existing) conditions, the slope below the 5th hole is marginally stable (factor of safety of 1.05). However, under seismic loading (taking into account topographic amplification of ground shaking), and saturated soils, the slope would be unstable (factor of safety of 0.63), and so is at risk from the next seismic or heavy rainfall event. The slope stability analysis showed that without shoreline protection structures, the most likely failure planes are 15 and 20 feet from the bluff edge at the 5th tee and green, respectively. Since elements of the 5th tee and green are located within 10 to 20 feet of the bluff, they are also at risk from slope failures such as slumping and landslides. Slope stability calculated for the seawall with tiebacks



used at the 5th tee, under the same seismic loading and soil saturation, slope stability is greatly increased (factor of safety of 1.19), which exceeds the 1.1 standard typically required for pseudo-static slope stability analyses.

C. Need for Shoreline Structure - Feasible Alternatives

The preceding discussion concludes that the 5th Tee and Green are existing structures in immediate danger from erosion and slope failure. The next Section 30235 "test" that must be met before a shoreline protective device can be approved is that the proposed armoring is "required" to serve coastal-dependant uses or to protect existing threatened structures. In other words, shoreline armoring shall be permitted if it is the only feasible alternative capable of protecting the structure.⁴ Other alternatives typically considered include: the "no project" alternative; drainage and vegetation measures on the blufftop itself; abandonment or relocation of the threatened structures; sand replenishment programs; other less damaging structural alternatives; and combinations of some or all of these options. The Applicant, and staff, has evaluated these alternatives, as described below.

The No-Project Alternative

The HKA 5/04 report evaluated the no-project alternative and, based on geotechnical results, determined that erosion from wave run-up will continue at the toe of the bluff, leading to further undermining along the 5th hole. Wave run-up would exacerbate toe erosion during each winter season. Subsequent rainfall would cause additional erosion and landsliding of the bluff face. The undercut 5th tee area and landslide scarp below the 5th green would likely collapse, causing further erosion and making the 5th hole unsafe to play. The 5th hole would thus ultimately have to be closed to prevent injury to users and the course again modified to relocate the hole elsewhere, which would require complete modification of the course, since residential and visitor serving commercial development now borders the entire course. Closure of the hole would eliminate the value of the golf course as a recreational use because golf courses must have 18 holes.

Drainage and Landscaping

Other non-structural alternatives typically considered by the Commission to respond to erosion are the use of selected bluff plantings and improved blufftop drainage controls. As described earlier, the HKA 5/04 report notes that due to historical erosion along other coastal bluffs in the PBGL area, the potential for erosion from surface and subsurface drainage was addressed by the Pebble Beach Company during initial project design, as well as during continued use of the new 5th hole. The new 5th hole was constructed with deep curtain drains located upslope of the green, shallow herringbone sub-drains just below the turf, and hydro auger drains at the back of the green. Ongoing turf management of the 5th hole also uses an irrigation system with sprinkler heads that direct water away from the bluff top, and monitors soil conditions so that the turf grass is watered on an as-needed basis, with water directed to the root zone only, in order to avoid soil saturation and surface runoff. In September 2003, following

⁴ Coastal Act Section 30108 defines feasibility as follows: "Feasible" means capable of being accomplished in a successful manner within a reasonable period of time, taking into account economic, environmental, social, and technological factors.



continued use of the hole and several years observations of rainfall events, surface water runoff was further controlled by constructing a berm along the bluff edge to direct runoff away from the bluff face and into a drop inlet, that carries the water beyond the erosional scarp, and allows for controlled discharge onto the bedrock below.

These types of "soft" alternatives can serve to slow erosion and increase bluff stability and thus to greatly extend the period of time before improvements are threatened by erosion. However, it must be understood that use of such alternatives does not prevent the natural coastal processes from continuing to impact the bluff. Given the active forces of winter storm events (including wave attack, high tides, and heavy winter rains) that take place unabated along the unprotected shoreline, erosion will eventually (over the long-term) result in bluff retreat in the project area. At which point, plantings and bluff drainage controls may not be adequate to address the erosion problem, and other alternatives (including armoring of the toe and bluff face) become more necessary.

In this case, given the highly erodable materials at this location, and the recent landsliding activity that has occurred, it doesn't appear that additional drainage controls and/or additional plantings, of and by themselves, would be able to stabilize the bluff to such a degree as to protect against continual wave impacts, wave run-up and subsequent slope failure. Thus this alternative alone would be insufficient to protect the 5th tee complex and 5th green complex. That said, such measures have a utility in all other alternative project scenarios and should be included in any approval of a project here.

Relocation of Threatened Structures

One alternative potentially available to protect the 5th hole without use of shoreline protection devices is relocation of the threatened 5th tee complex and 5th green complex.

As previously described, the 5th hole is bounded on the southwest by the eroding shoreline, and on the northeast by the 10-foot wide paved golf cart path that is located along the boundary of the adjacent residential parcel, and so can not be moved further inland. While there are steps leading down from the cart path to the main tee, there is about 8 feet of space between the bottom of the steps and the main tee, and about another 8 feet of space between the main tee and the upper tee. Thus, if the tees (and the associated drainage improvements and retaining walls) were moved up against the base of the slope below the cart path and set next to each other, the outboard edge of the tee boxes could potentially be moved about 16 feet landward of its present location. However, because 15 to 20 feet of blufftop recession could occur in one event due to episodic failure, relocation 16 feet landward would not be enough to avoid such an event. The applicant has also indicated that relocation of the 5th tee would cause sight line problems and change ball travel paths, which would change playability and hole rating as well.

The 5th green is similarly located between the eroding shoreline and the cart path. However, as measured from aerial photos of the site (since the path is not shown on site plans for this area), there is about 50 feet of space between the green and the cart path. Thus if the green (and associated drainage improvements and bunkers) were moved to within 10 feet of the cart path (to allow room along the cart path for pedestrian safety), the outboard edge of the green could potentially be moved about 40 feet landward of its present location. Such relocation would move the green landward of the predicted 50-



year bluff recession setback of 30 feet and the area potentially at risk from episodic failure. However, the applicant considers that such relocation is not feasible since relocation of the green would move it behind two large landmark oak trees that border the cart path, and thus out of the line of sight, removing the ability to reach the green from the tees, and thus changing the design and par for the hole.

The HKA 5/04 report, which analyzed project alternatives, states that relocation of the tee and green complexes is not feasible, due to physical site constraints, and undermining of the design integrity of the hole. Relocation of the green complex would cause problems with sight lines and ball travel paths, reduce the "safety zone" area used by golfers to minimize the risk of the ball ending up in the water, and reduce the size and function of the green. Such changes would also undermine the integrity of the golf course, itself, which is currently ranked as the number one publicly accessible golf course in the US.

One other way of moving the tee complex from the bluff edge is by reducing the size of the total tee box area (by, for example removing the upper tee and/or reducing the size of the main tee box; see Exhibit E). However, as described by Cheryl Burrell, of the Pebble Beach Company, in a letter dated 8/12/04, use of different tee areas, and the total turf area, are important components of golf course management, and allow for damaged turf to recover from divots created by striking the golf ball. Combining or reducing the tee areas would also be a severe detriment to the hole, since the tee surface is already well below the standard required for a par 3 hole under US Golf Association (USGA) guidelines. Ms Burrell's letter goes on to note that the tee area of the 5th hole was designed with only 55 to 60 percent of the normal amount of turf required for a comparable par 3 hole (4,605 sf of turf area at the PBGL 5th tee versus 7,380 to 8,250 sf of turf area based on USGA guidelines); thus loss of any additional tee area would create a significant negative impact to the quality of the golf hole (i.e., by limiting options for ball placement due to inadequate time or space for turf management to re-grow grass in areas of divots).

Overall, according to the applicant, altering, relocating, or deleting critical components of the 5th hole would compromise the integrity of the Jack Nicklaus design, negatively affect playability and rating (difficulty) of the hole, and would diminish the aesthetic value of the hole and of the golf course overall, which could have similar consequences to those described for the no-project alternative.

Since non-structural alternatives, of and by themselves, are not enough to effectively protect the existing structures from ongoing erosion, it is necessary to evaluate structural alternatives.

Least Damaging Structural Alternative

Because there are no feasible non-structural alternatives, shoreline protection is needed along the bluff face below the 5th tee complex and 5th green complex in order to protect the existing structures and public recreational uses provided by this area. The current bluff face along the 5th hole is basically an erosional coastal bluff made up of cemented sandstone and conglomerate bedrock that extends from about 2 to 13 feet above the mean sea level (MSL), and overlying marine terrace deposits that extend from about 13 to as much as 48 feet above MSL. A portion of the bluff face near the 5th green is currently protected by temporary rip-rap revetment at the toe of the bluff with shotcrete surfacing over the marine terrace deposits, permitted under emergency permit 3-03-111-G, issued by the Coastal Commission in December, 2003; the current project is a follow up for this earlier emergency shoreline



protection. As described above, significant shoreline erosion has occurred since construction of the 5th hole in 1998, and will continue to do so due to long-term wave erosion that undermines the bluff and episodic erosional events (landslides, debris flows, seismic shaking, etc).

The HKA 5/04 report analyzed different potential structural solutions including a permanent engineered riprap revetment along the shoreline, and bluff face retaining walls. The emergency rip-rap structure currently onsite provides short-term protection, but could be extended and expanded to provide long-term protection. However, because the bluff face is very steep and high (nearly 40 to 48 feet high), it is unlikely that a riprap revetment could be placed all the way up to the blufftop to protect the upper bluff face from continued erosion. Also, because the bedrock platform slopes gently seaward, it is unlikely that the sloping bedrock platform could hold a large, steep revetment. Additionally, a permanent riprap structure that is flat enough to be stable would extend far out from the base of the bluff, which would severely impact lateral access and eliminate recreational use of the narrow beach in that location. Such a massive structure would also likely affect coastal processes such as littoral drift, impacting down coast sediment supply, and so would merely relocate the shoreline erosion problems further down coast. While the temporary shotcrete installed below the 5th green, is currently holding the slope, it is still susceptible to erosion, and landslide activity. If additional shotcrete were to be used on the upper bluff face, it could be similarly susceptible to erosion around the edges and from behind. A bluff face retaining wall was also considered as a possible structural alternative. However, because of the steep bluff face at the 5th tee and the unconsolidated nature of the marine terrace deposits, it would be impossible to set a bluff-face retaining wall in without it being continually undermined and outflanked.

The preferred structural alternative is the project as proposed, which includes the placement of approximately 243 linear feet of seawall (83 feet at the 5th tee and 160 feet at the 5th green) against the existing bluff face (at the 5th tee), or within 4 feet of the bluff face (at the 5th green). The walls have been designed to be vertical or near vertical, located adjacent to the existing bluff face to minimize landform alteration and encroachment onto the beach. The 5th tee seawall will slope slightly and conform to the existing bluff face, while the 5th green seawall will be a vertical seawall, backfilled with engineered fill to stabilize the bluff above it and recreate a maximum 2:1 slope, which will be revegetated to help reduce erosion. The 5th tee seawall will incorporate cavities into the wall to allow plantings similar to those on the adjacent bluffs, while avoiding potential erosion of the bluff face. Use of steel tiebacks allows for the high, vertical design and close footing at the base of the bluff.

The only fill of open coastal waters will be that portion of either seawall that is keyed into the bedrock below the toe of the bluff. Consequently, the proposed seawalls will cover approximately 480 sf of beach. Project plans dated 8/04 show that the seawalls would be keyed in to bedrock to a bottom elevation of 1 foot MSL (mean high tide is at 1.6 feet MSL). Wing walls will extend 12 feet on either side of the 5th tee seawall and 11 feet on either side of the 5th green seawall to further key the walls into the existing bluff. The Coastal Commission staff coastal engineer, Lesley Ewing, reviewed the project plans, and noted that while the wing walls do extend somewhat beyond the immediate area at risk, they are not excessive, and do not require modification. She also concurred with the HKA assessment that the position of the end of the wing walls are located in the best locations to tie into the natural bluff face,



and should minimize future required maintenance on the seawalls and minimize the need to expand the seawalls in the future.

As proposed, construction work will be done from the beach or from atop the coastal bluff (see Exhibit I). Heavy equipment will access the beach via the ramp at the Stillwater Cove pier (approximately 450-900 feet west of the project area), and shall remain above high tide at all times. As construction activities could result in unintentional discharge of sediment or construction materials into coastal waters of the Monterey Bay National Marine Sanctuary, a construction management plan shall be required that shows BMPs to be used to prevent such events from occurring; BMPs shall include, but not be limited to, placing coir rolls and/or silt fabric around the project construction area to keep sediment and construction debris from entering the intertidal zone. Heavy equipment used for concrete pouring will be located on the coastal terrace, and required to be set at least 50 feet landward of the blufftop. Other heavy equipment may be used periodically atop the coastal bluff, but will be required to be removed from the blufftop when not in use. All heavy equipment and project construction materials shall be stored in the construction staging areas, to be located as shown in Exhibit I.

Compared to the other structural options, and as conditioned to require adequate blufftop setback for heavy equipment, a construction management plan for all construction activities, and to prohibit construction equipment, debris, or other project related materials below mean high tide, the proposed project appears to be the least environmentally damaging structural alternative, consistent with Coastal Act Section 30233(a).

Conclusion

The proposed development is required to protect existing structures associated with the 5th hole. The 5th tee and green complexes, which are 10 to 20 feet from the bluff edge, are immediately threatened by episodic erosion which can cause as much as 15 to 20 feet of bluff recession in a single event. Under existing static conditions the bluff face is marginally stable, however, under seismic loading or saturation from rainfall or seepage, the slope becomes unstable, and so is at risk from any future seismic or heavy rainfall event. Use of the vertical wall with tiebacks increases slope stability to an acceptable level.

While it may be possible to move the tee about 16 feet landward and the green about 40 feet landward, such relocation will not necessarily move critical elements of the hole beyond the area of potential bluff retreat (due to continued episodic bluff failure that would continue to be possible). Additionally, as described by the applicant, alteration, relocation or loss of critical components of the 5th hole, such as elimination of the upper tee or portions of the 5th green, would negatively affect the unique, challenging shot provided by the configuration of the hole across the bluff, would result in a net reduction of total teeing area on a hole with a minimum amount of existing teeing area based on USGA guidelines, and would result in a significant negative impact on the quality, playability, and the rating (or difficulty) of the hole, and thus would diminish the aesthetic value of the golf hole.

Because of the extent of shoreline erosion that has occurred to date, and the potential for 30-35 feet of bluff recession over 50-year economic life of the structures, and 15 to 20 feet of erosion that could occur



during a single event, evaluation of feasible project alternatives has found that non-structural alternatives alone will not be sufficient to protect the 5th tee complex and 5th green complex. Therefore, in this case, a shoreline protection structure must be approved because it is required to protect existing structures at risk from erosion, pursuant to Section 30235.

The project has been designed to minimize landform alteration, and also serves to minimize impacts to lateral access and recreational use of the beach below by its vertical design and use of steel tiebacks and wing walls. However, the proposed design includes fill in open coastal waters (to key the wall into the underlying bedrock), and construction activities have the potential to impact coastal resources, such as intertidal habitat and water quality. Therefore the project has been conditioned to require a construction management plan that includes BMPs and equipment handling and storage to protect the beach and inter/sub-tidal areas from inadvertent discharge of sediment, construction material or other debris.

D. Mitigation of Shoreline Sand Supply Impacts

The fifth test of Section 30235 (previously cited) that must be met in order to allow Commission approval is that shoreline structures must be designed to eliminate or mitigate adverse impacts to local shoreline sand supply.

Beach sand material generally comes to the shoreline from inland areas, carried by rivers and streams; from offshore deposits, carried by waves; and from coastal dunes and bluffs, becoming beach material when the bluffs or dunes lose material due to wave attack, landslides, surface erosion, gulying, et cetera. Wind and wave action often provide an ongoing mix of material between beaches and coastal bluffs, along an erosional shoreline. When a shoreline protective device covers the back-beach or bluff face, the natural exchange of material either between the beach and bluff will be interrupted and, if the shoreline is eroding, there will be a measurable loss of material to the beach. In a receding shoreline (i.e., during times of sea level rise), all bluff material contributes to the littoral system at some level. However, sand and larger grain material are the most important components of the beaches in the vicinity of the project, and only the sand portion of the bluff or dune material is characterized as beach material.

Some of the effects of engineered armoring structures on the beach (such as scour, end effects, and modification of the beach profile) are temporary or difficult to distinguish from all the other actions that modify the shoreline. Such armoring also has distinct qualitative impacts to the character of the shoreline and visual quality. However, some of the effects that a structure may have on natural shoreline processes can be quantified, including: 1) the amount of material that would have been supplied to the beach if the back-beach or bluff were to erode naturally; 2) loss of the beach area on which the structure is located; and 3) the long-term loss of beach area that will result when the back-beach location is fixed on an eroding shoreline.

Obviously each of these potential impacts of shoreline structures affect public access and recreation by removing sand from the system that might otherwise replenish sandy beaches, encroaching on beach areas otherwise available for public use, or by causing the loss of beach area in front of the structure



through passive erosion. The impact of the proposed seawall on public access and recreation is further discussed in Section 3, below.

Sand Supply

The US Geological Survey also studied sediment distribution and transport along the Monterey peninsula and Carmel Bay in detail. According to the Storlazzi and Field 2000 paper, the cliffs that back the beach along the eastern half of Stillwater Cove are composed of the easily eroded Carmelo formation, which is described as a submarine canyon deposit that includes marine sandstone with igneous and metamorphic lenses. By comparison, the western and eastern ends of Stillwater Cove are composed of more resistant granodiorite west of the Beach Club, and Tertiary volcanics of the Carmeloit Formation at Arrowhead Point. Sediment samples collected from various beaches along the peninsula as part of these studies show that beach sediment on Stillwater Cove is significantly different than that found in other areas, including Carmel Beach, immediately down coast from Arrowhead Point. Storlazzi and Field specifically note that

Even though there is a large percentage (~30% by mass) of well-rounded ferromagnetic gravel in the sediment along Stillwater Cove, the mean grain size falls close to the medium-to-fine sand transition. The sand fraction of this sediment tends to be more quartzitic and have a lower concentration of feldspars than along adjacent stretches of the coast. ...Just south of Arrowhead Point, the sediment is similar to that along the western part of the Monterey Peninsula, in that it is more feldspathic in composition and lighter in color than the sediment in Stillwater Cove.

Storlazzi and Field 2000, state that the source of sediment in Stillwater Cove

...appears to be both the granodiorite porphyry and the Carmelo Formation that crops out along much of the cove's shoreline. Granodiorite-derived sediment is contributed by both streams that drain the southern part of the peninsula and discharge into Stillwater Cove and the eastward transport of sediment along the southern peninsula's shoreface. The lack of any beaches along the southern part of the peninsula, along with the dominant northwesterly wave direction and shore parallel patches of sediment observed offshore of the surf zone indicate transport of sediment from the peninsula into the cove....

Distinct large volcanic pebbles are present in the low bluffs of the Carmelo Formation that back the southern part of Stillwater Cove, and their presence in beach and nearshore deposits verifies that a significant fraction of the littoral sediment originated from these bluffs. Littoral sediment in this area is probably transported offshore and ultimately into the Carmel submarine canyon via nearshore channels identified in the bathymetry and aerial imagery. Arrowhead Point, which is composed of Carmeloite volcanics, is resistant to erosion and appears to be an effective barrier to southward sediment transport out of Stillwater Cove



Storlazzi and Field 2000, found that the beach sand at Carmel Beach is distinctly different composition than that found on Stillwater Cove, which leads them to believe that southward transport from Stillwater Cove to Carmel Beach does not occur.

Therefore, based on Storlazzi and Field 2000, while about 30% of the beach sediment in Stillwater Cove is comprised of well-rounded ferromagnetic gravel, approximately 70% is comprised of medium to fine-grained sand sized materials that have either been eroded from the coastal bluffs that back the beach, or the exposed granodiorite located along the southern peninsula shoreface and transported to the site via littoral currents that move sediment easterly and into Stillwater Cove. Since the erosion rates of the back beach bluffs are relatively higher than that for the more resistant granodiorite, the bluffs supply a greater proportion of the sand to the beach.

And, because of the significant differences in sediment composition between Stillwater Cove and Carmel Beach, it is believed that sand sized sediment is not transported further south, around Arrowhead Point but rather is probably transported offshore and ultimately into the Carmel submarine canyon. Therefore, unlike beaches located in the midst of a littoral cell, where longshore currents may provide significant amounts of sand from up-coast sources, retention of bluff material by shoreline protective devices could cause a significant reduction in sediment supplied to the beach at Stillwater Cove. And since there are not many areas where the Carmeloit formation exists, the chemical composition of the beach is unique, and not easily replaced by sands mined elsewhere for potential renourishment.

Sand Supply Loss Due to Retention of Bluff Material by Shoreline Protection Devices

Shoreline retreat and erosion is a natural process that can result from many different factors such as wind, wave and tidal erosion, sea cave formation and collapse, saturation due to high ground water, and bank sloughing. Erosion of these materials serves as inputs back into the system, where it may be deposited further downstream or down coast. Since most coastal bluffs in California are made of sandy marine terrace deposits, or sandy alluvial and fluvial sediment, bluff retreat is one of several ways that beach quality sand is added to the shoreline. Thus the natural coastal processes that work to form and retain material on sandy beaches can be significantly altered by the construction of shoreline armoring structures because they remove sediment that would otherwise be supplied to the littoral system.

The subject site is located within Stillwater Cove, which is exposed to southwesterly winter wave energy. As a result of its location, and narrow beach fringe, strong winter waves can scour the sandy beach all the way to the more compacted and cemented sandstone and conglomerate bedrock wave cut platform, which sits at an elevation of about zero to +2 MSL. During times of prevailing weather, however, the lesser wave energies move most of the sand back onto the bedrock terrace and build the beach to an elevation of about +5 MSL; what is not moved across shore and back onto the beach is moved alongshore by the littoral current. The Storlazzi and Field 2000 study points out that due to the existing geographic configuration of the shoreline, the eastern portion of Stillwater Cove beach is somewhat protected from northerly and westerly wave approach by the Monterey peninsula and southwesterly waves by Point Lobos, Pescadero Point and a group of offshore rocks that marks the



southwestern boundary of the cove. Thus erosion at Stillwater Cove most likely occurs when strong southwesterly winter storm waves approach the shoreline.

Given that the project proposes to construct shoreline structures (seawalls) to protect the site from erosion, it also reduces the amount of sediment that can enter the system, which when transported into the littoral system, can serve to feed the beach at Stillwater Cove both by cross shore transport (on and off the beach) and alongshore transport (extending further down the beach). As proposed, the 5th hole seawalls will cover a linear distance of 243 linear feet (5th tee seawall is 83 ft long + 5th green seawall of 160 feet long), and will extend to a height of approximately 46 to 48 feet at the 5th tee, and from 14 to 22 feet at the 5th green. According to the sand supply evaluation conducted by the project geotechnical engineers (HKA 8/04), based on an average erosion rate of 0.7 feet per year, the volume of sediment retained by shoreline protective structures at the 5th hole is estimated to be approximately 237 cy per year (95 cy retained by the 5th tee seawall + 142 cy retained by the 5th green seawall annually).

The geotechnical report indicates that based on the geologic exposure of the bluff, with the lower 25% of the coastal bluff composed of bedrock conglomerate, and the upper 75% is composed of marine terrace deposits, the contribution from each formation would be about the same, meaning about 25% bedrock erosion and 75% terrace deposit erosion. The HKA 8/10 letter report also indicated that based on sediment sampling from the site, it was determined that the average beach sand in the area was made up of sediment sizes coarser than 0.15 mm. Further sediment sampling from the bedrock and marine terrace deposits also indicated that 70% of the total volume of bedrock and terrace deposits have a grain size of more than 0.15 mm, which would remain in the littoral system (inferring, then, that the other finer grained fraction is usually removed from the system by suspension or some other factor, and so would be lost whether the shoreline armoring was present or not). Thus it was calculated that 70% of the total volume, or 166 cy of sediment, would be removed by the shoreline armoring proposed by the project (66 cy from the 5th tee seawall and 100 cy from the 5th green seawall). Over the estimated 50-year economic lifespan of the project, this would result in the approximate loss of about 8,300 cy that would otherwise nourish the beach.

However, as the loss of this sediment reduces the sediment supply to the rest of the beach, it is also expected that this loss of sediment supply will result in some increased erosion rates, and thus further loss of beach, down coast of the shoreline protective devices. At the present time, the length of the existing beach is approximately 1,300 linear feet; however, with shoreline protective devices located approximately 600 feet south of the beach accessway, the remainder of the beach, approximately 64% of the beach, would experience increased beach erosion due to reduced sediment supply.

Sand Supply Loss Due to Structural Encroachment on the Beach

Shoreline protective devices, such as the two seawalls proposed, are all physical structures that occupy space. When a shoreline protective device is placed on a beach area, the underlying beach area cannot be used as beach. This generally results in a loss of public access as well as a loss of sand and/or areas from which sand generating materials can be derived. The area where the structure is placed will be altered from the time the protective device is constructed, and the extent or area occupied by the device will



remain the same over time, until the structure is removed or moved from its initial location, or in the case of a revetment, as it spreads seaward over time. The beach area located beneath a shoreline protective device, referred to as the encroachment area, is the area of the structure's footprint.

In this case, the 5th tee seawalls have been designed using vertical and nearly vertical walls with tiebacks in order to remain within 4 feet of the base of the bluff, and so occupy only a very small portion (480 square feet) of the sandy beach located at the toe of the bluff. As described above, use of a revetment structure would require a massive footprint that would likely have to extend out entirely across the narrow beach at the base of the bluff. By selection of the vertical wall with tiebacks, the project has been designed in a manner that minimizes beach encroachment. While construction activities will temporarily require additional use of beach area, no lasting impacts are expected to occur as a result.

If natural erosion were allowed to continue (absent the proposed armoring), some amount of beach material would be added to natural sediment transport system and larger littoral system that serves the Stillwater Cove shoreline. The total volume of material that would have gone into the sand supply system over the lifetime of the shoreline structure would be the volume of material that would have come from bluff erosion, and material that would have come from the beach at the toe of the bluff. While we have no data to indicate the average loss of beach sand (e.g., from historic beach profiles), we know it will be somewhat more than the 166 cy per year calculated for bluff erosion. If as much as 1 foot of beach sediment would have been exchanged over the seawall footprint (480 sf), the result would be approximately 18 cy retained on the beach by the footprint alone, for an estimated total of about 184 cy (166 cy due to bluff retention + 18 cy due to beach retention).

Impacts of Fixing the Back Beach

Experts generally agree that where the shoreline is eroding and armoring is installed, as would be the case here, the armoring will eventually define the boundary between the sea and upland areas. On an eroding shoreline fronted by a beach, the beach will be present as long as some sand is supplied to the shoreline and the beach is not submerged by sea level rise. As erosion proceeds, the beach also retreats. This process stops, however, when the retreating shoreline comes to a revetment or a seawall. While the shoreline on either side of the armor continues to retreat, shoreline retreat in front of the armor stops because no more material is available to be eroded. Erosion will continue to proceed on either side of the structure and eventually, the shoreline fronting the armor protrudes into the water, with the mean high tide line fixed at the base of the structure. In the case of an eroding shoreline, this represents the loss of a beach as a direct result of the armor. This effect, which is known as "passive erosion," is what will eventually cause the formation of peninsulas if the proposed seawalls are constructed at the PBGL 5th Tee and 5th Green.

Passive erosion can be the most significant impact caused by seawall placement on eroding coastlines. The alteration in the shape of the shoreline in front of and on either side of the armoring structure causes detrimental impacts to public lateral access and recreation as the existing beach in front of the structure is lost. In addition, as the beach becomes narrower over time, there is a risk of injury to swimmers at high tides and to beachgoers who may get caught between the wall and high surf. The passive erosion in



front of the seawalls that will result from the proposed project will eventually eliminate the public recreational beach area in front of the 5th hole, as well as the existing lateral access and recreational opportunities this beach now provides.

Stillwater Beach fronts the coastal bluffs along the 4th, 5th and 6th holes, between Stillwater Pier and Arrowhead Point, and is open to the public via the Stillwater Cove access way (ramp/stairway) at the southeastern end of the Beach Club parking lot. Based on measurements taken from a 2001 aerial photo submitted as part of the draft construction access plan, the beach is about 1,300 feet long. Based on measurements taken from the applicant's cross-sections, the beach is about 90 feet wide at its widest point (5th tee, Section 6), and as narrow as 48 feet (5th green section 4), narrowing down to about 20 feet wide where the beach ends against Arrowhead Point. The average beach width, based on widths taken from all 13 cross sections measured, is approximately 68 feet.

As described previously, HKA has determined shoreline erosion rates at the 5th tee and 5th green of 0.7 and 0.6 feet per year, respectively. Coastal geologists from the US Geological Survey have studied coastal processes and shoreline change along the Monterey Peninsula. They indicate that, based on aerial photo interpretation, the beach at Stillwater Cove has narrowed at least 33 feet in the last 40 years, which equates to a beach recession rate of approximately 0.82 feet per year.

Construction of the proposed seawalls will serve to fix the back beach, and over time will lead to the formation of peninsulas protecting the 5th Tee and 5th Green, which will result in a loss of the beach in front of these structures, as well as a loss of public access to whatever beach may remain south of these structures. Using an average shoreline erosion rate of 0.7 feet per year (average of the three rates given), passive erosion will reduce the beach width seaward of the 5th Tee and 5th Green by at least 35 feet within 50 years, and by 68 feet (average beach width) in approximately 97 years. Although the geotechnical reports do not discuss impacts of sea level rise, it is certain that sea level rise would exacerbate the situation,⁵ by moving the mean tide level landward, and allowing deeper water wave energies to impact the shoreline. It is also likely that once the seawall is constructed, it will be

⁵ There is a growing body of evidence that there has been a slight increase in global temperature and that an acceleration in the rate of sea level can be expected to accompany this increase in temperature. According to the *Third Assessment Report - Climate Change 2001*, by the International Panel on Climate Change (IPCC) global sea level is predicted to rise by 0.09 to 0.88 meters (0.3 to 2.88 feet) from the 1990 level by 2100, with significant regional variability. Monterey Bay was not included in the estimates of sea level rise through the year 2100. The closest tidal stations with an adequate record to use for a 100-year projection were San Francisco and Santa Monica. Both those locations could, by the year 2100, have a rise in sea level approaching 3 feet, with a 10% probability that it would be higher than that, based on estimates of historic and future sea level change provided by the U.S. Environmental Protection Agency in Titus and Narayanan (1995) "The Probability of Sea Level Rise" (EPA 230-R-95-008). In the Monterey Bay area, the trend for sea level rise for the past 25 years has been an increase resulting in an historic rate of nearly 1 foot per 100 years (NOAA, National Ocean Service), significantly higher than the average historic change recorded at either San Francisco or Santa Monica. This deviation in historic trends between Monterey Bay and both San Francisco and Santa Monica is very likely due to the short duration of the tidal record at Monterey; however, it can also suggest that the localized rise in sea level in Monterey Bay may be higher than what was experienced at either San Francisco or at Santa Monica. Thus the future 100 year-change in mean sea level for Monterey Bay may be higher than the estimated 2.7 feet (for San Francisco) or the estimated 2.85 feet (for Santa Monica).



maintained and repaired in order to actually extend its lifetime, so it is not unreasonable to expect that the Pebble Beach Company would do otherwise, thus it is possible that the entire beach in front of the 5th Tee and Green complexes will be lost within 97 years (and perhaps sooner if erosion rates increase as is expected due to sea level rise).

The Commission has established a methodology for calculating the long-term loss of public beach due to fixing of the back beach, this impact being equal to the long-term erosion rate multiplied by the width of bluff that has been fixed by a resistant shoreline protective device.⁶ Using this calculations, and given the range of estimated average erosion at the 5th hole of between 0.6 to 0.82 feet per year, the impact of the 243 ft of seawall (83 ft long 5th Tee seawall + 160 ft long 5th Green seawall) then translates to passive erosion of approximately 146 to 199 square feet of beach per year.⁷ Over the 50-year life of the project, passive erosion would reduce the available beach area from between 7,300 sq. ft. (0.17 acres) to 9,950 square feet (0.23 acres).

Additionally, once the beach in front of the seawalls is gone, the entire beach area south of the seawalls will be unavailable as well, because lateral beach access to this area will no longer remain. Thus approximately 700 linear feet of beach south of these structures, or nearly one acre of beach (700 feet x 68 foot average width = 1.1 acre) will be lost from the 5th tee to the southeastern end of the beach due to construction of the project. Loss of the beach in this area also results in loss of the associated recreational activities provided by this section of Stillwater Cove Beach (discussed further in Public access section below).

Cumulative Impacts of Shoreline Armoring

Historically, responses to shoreline erosion and upper coastal bluff failure have been to install protective structures on a case-by-case basis. These are usually proposed when there is some evidence of erosion or failure, often after significant El Nino storm events. Protective structures include rock and mortar, rock riprap, seawalls, and concrete cube revetments.

As shown in Table 1, in Section 3c of this report, at least 14 permits have been granted for shoreline protective structures along the Pebble Beach Golf Links shoreline. Shoreline protection permits have been approved by both Monterey County and Coastal Commission permits. Structures located along the 5th, 9th, and 10th holes have all been permitted by past County permits, while structures located along the Beach Club shoreline, and the 4th hole, 17th green, 18th tee, and 18th green have been permitted by Coastal Commission actions. The Coastal Commission also permitted the repair or modification of some of these structures after LCP certification through amendments to the earlier Coastal Commission permits, as required by conditions of those permits. The Commission also approved three *de minimis* waivers for repairs of the existing riprap revetment along the shoreline of the Beach Club at Stillwater

⁶ The area of beach lost due to long-term erosion (Aw) is equal to the long-term average annual erosion rate (R) times the number of years that the back-beach or bluff will be fixed (L) times the width of the bluff that will be protected (W). This can be expressed by the following equation: $Aw = R \times L \times W$.

⁷ That is, 0.6 feet per year multiplied by 243 feet for the lateral beach area that will be blocked by the seawall, equals approximately 146 square feet per year; 0.82 feet per year equates to 199 square feet per year.



Cove, excavation of test pits, and equipment operations on the beach to support bluff stabilization efforts permitted by the County. Thus, while the permits are often considered on a case-by-case basis, the cumulative impact of approving these projects is that about 1,940 feet of the approximately 11,350-foot shoreline (or approximately 17 percent) along the PBGL is now armored.⁸ Other shoreline protective structures are located along residential and other open space parcels in the Del Monte Forest Land Use Plan area, and together occupy a total of approximately 10 percent of the Del Monte Forest shoreline.

As discussed, this permit would result in 243 linear feet of additional armoring along Stillwater Cove, 480 square feet of beach encroachment from construction of the seawalls, passive erosion of approximately 0.17 to 0.23 acres of beach in front of the seawalls, and ultimately recreational loss of over 1 acre of public beach as a result. Thus the cumulative impacts of this project are significant.

As discussed in the Commission's Monterey County LCP Periodic Review, one way to avoid future *ad hoc* decision making and to mitigate for the cumulative impacts of incremental shoreline armoring along the Del Monte Forest shoreline is to develop a comprehensive shoreline management plan for the entire Del Monte Forest shoreline. A comprehensive shoreline management plan would identify where ongoing erosion is of concern, when and where non-structural actions (such as setbacks, relocation, landscaping and drainage improvements) can be used to reduce risk from shoreline erosion, and where and what type of mitigation measures are most appropriate. Such a comprehensive shoreline management plan could then be used to avoid structural armoring where possible, provide design guidelines when shoreline armoring is necessary, identify appropriate setback and relocation strategies, and identify appropriate mitigation requirements. While the intent of the shoreline management plan would be to evaluate all feasible alternatives in order to avoid further shoreline protective devices, in cases where avoidance is not possible, such a plan would also require use of best available technology for integrating shoreline protective devices into the natural landscape and would provide more specific design criteria to ensure that development of necessary shoreline structures would be carried out in a manner that protects coastal resources in conformity with Coastal Act requirements. Requiring such a shoreline management plan also follows the Marine Sanctuary Action Plan's call for developing sub-regional shoreline guidelines.

Therefore, mitigation for the cumulative impacts described above requires a comprehensive plan to address long-term shoreline management and alternatives to armoring the shoreline. Since the Pebble Beach Company owns most of the shoreline in non-residential areas in Del Monte Forest, which currently provides golf courses, coastal access and other recreational use (e.g., hiking and equestrian trails), and would be responsible for ongoing shoreline protection efforts, it is recommended in the Periodic Review that they in fact develop such a comprehensive plan for all of their holdings, which could then be used by the County as a pilot project for a larger, Del Monte Forest Planning Area comprehensive shoreline management plan. Furthermore, since the Pebble Beach Company has historically served as the general services manager for much of the Del Monte Forest area, managing road repair and maintenance of the golf courses and public beach access points throughout the Del

⁸ PBGL shoreline length and armoring lengths given are approximate, and are based on available data in GIS developed for Periodic Review.



Monte Forest Area, they would have the ability to develop a coordinated plan for most of the publicly accessible shoreline in Del Monte forest, as well as the means to conduct necessary mitigation requirements proposed by such a plan.

However, to make such a recommendation proportional to the additional impacts created by this project, this permit has been conditioned to require the Pebble Beach Company to develop a shoreline management plan for the Stillwater Cove area (from the 18th Tee northwest of Stillwater Pier to Arrowhead Point), within 2 years of project approval, as outlined in Special Condition 5.⁹ The Stillwater Cove Shoreline Management Plan shall identify baseline conditions at Stillwater Cove, based on beach and bluff profiles, the littoral cell within which the project is located, the source and rate of sediment transport, the volume and manner of sediment exchange (ie., amount of sediment moved alongshore and out of the littoral cell, versus that moved cross shore, and generally retained by the beach), and to recommend what mitigation measures would be most appropriate under prevailing conditions at this location.

In order to evaluate the actual impacts of the approved seawalls, and to collect data with which to develop the shoreline monitoring plan described above, Special Condition 7 also requires the applicant develop and implement a plan for monitoring, maintenance and reporting of the seawalls and adjacent beach and bluff profiles, in order to establish baseline conditions, and monitor change over time as a result of the project. Thus, Special Condition 7 requires the applicant to conduct 10 beach profiles at Stillwater Cove (at no more than 200 foot increments between Stillwater Pier and Arrowhead Point), and as shown in Exhibit I2, prior to construction of the seawalls and immediately following construction. Beach and bluff profiles shall also be monitored twice annually (to measure the winter and summer beach profiles) for the first five years following construction, and then annually each summer for up to 10 years to identify changes to the beach width and volume following construction of the 5th tee and 5th hole seawalls. Surveys should be conducted around the same time each year to make comparisons of beach width under the same wave climate and climatic conditions over time. The applicant shall also be required to conduct annual maintenance for a minimum of five years to remove any loose riprap and other debris from the beach between Stillwater Pier and Arrowhead point in order to keep the maximum width of the beach available for public use. Additional permits or permit amendments may be required if existing, previously permitted riprap revetments are in need of further repair.

Sand Supply Impacts Conclusion

As detailed above, the 5th hole seawall project as proposed will retain at least approximately 184 cy of coastal bluff material that would otherwise nourish the beach at Stillwater Cove. Since the seawalls have a projected lifespan of 50 years, this would ultimately result in a reduction of approximately 9,200 cy of sand removed from the system, and more if repair and maintenance of the seawalls serve to extend their lifespan, as would be expected. Additionally, by placing a shoreline protection structure against the bluff to protect the 5th tee and 5th green, the location of the back beach in those areas becomes fixed, and

⁹ It should be expected that future applications for similar shoreline protection devices along the PBGL shoreline (e.g., the follow-up permit required for 18th fairway emergency seawall permit CDP# 3-05-003-G) would require similar conditions. Thus it may benefit the applicant to expand the area of the shoreline management plan to cover all PBGL shoreline parcels



the beach in front of the structures can become compressed, or narrowed, over time because the beach/bluff system can no longer fluctuate in response to changes in sea level or wave climate. Thus loss of sand supply to the beach, encroachment on the beach, and fixing of the back beach by use of these shoreline structures will reduce sediment supply to the beach and littoral system, lead to a narrowing of the beach in and around the project area, and ultimately result in the loss of approximately 1 acre of beach and, consequently loss of the public recreational opportunities provided by the beach (as described further in the Public Access section, below), and possibly faster long-term erosion rates for adjacent unprotected coastal bluffs.

Section 30235 requires that shoreline structure eliminate or mitigate sand supply impacts. Various mitigation approaches for dealing with these potential adverse impacts were given in the HKA 8/04 letter report, including periodically trucking in sand to the site to nourish the beach, payment of an in lieu mitigation fee to support local beach nourishment projects, and supporting land use activities elsewhere that increase sand supplies to beaches (such as the elimination of dams), however few details accompanied these options and no specific mitigation measure was recommended by the report.

While the Commission has commonly applied in-lieu fees or beach nourishment as mitigations for sand supply impacts, no such in-lieu fee program currently exists in the Del Monte Forest area, and because of the unique mineralogic composition of beach sands at Stillwater Cove, and the sensitive nearshore habitat adjacent to the site, renourishment of the beach is not deemed feasible at this time. Similarly, while supporting land use activities that increase natural sand supplies to beaches would be beneficial, such activities might actually be located far from the project site at hand and so require a long time to have beneficial impacts at the actual project site. Because of this, the Commission usually prefers on-site mitigation when feasible.

Cumulative impacts of shoreline structures along the PBGL shoreline have resulted in armoring approximately 17 percent of the shoreline. While it has been shown that shoreline protective devices are necessary to protect critical elements of the PBGL in this case, as recommended in the Periodic Review, alternative approaches to armoring (such as relocation, beach renourishment, etc.) should be studied and implemented as part of a comprehensive shoreline management plan developed for the Stillwater Cove shoreline to mitigate for cumulative impacts of shoreline protection devices. Therefore, the permit has been conditioned to require such a shoreline management plan for the Stillwater Cove area (between the 17th green and Arrowhead Point).

In order to evaluate the actual impacts of the approved seawalls, and to collect data with which to develop the shoreline monitoring plan described above, the applicant has also been required to develop and implement a plan for monitoring, maintenance and reporting of the seawalls and adjacent beach and bluff profiles, in order to establish baseline conditions, and monitor change over time as a result of the project.

Thus only as conditioned to mitigate for impacts of the project, can it be found consistent with the fifth and final test of Section 30235, and is thus consistent to the degree feasible with this Section of the Coastal Act.



E. Long Term Structural Stability and Assumption of Risk

Geologic Stability

The geologic setting of the project site is described in the supplemental geotechnical report prepared for the project by Haro, Kasunich and Associates in June 2004 (HKA 6/04). According to the supplemental geotechnical report, the coastal bluff adjacent to the 5th hole is about 40 to 48 feet high, and composed of near vertical sandstone with cemented conglomerate bedrock at the base of the bluff, extending from the toe, at about 2 ft MSL up to about 13 ft MSL. The bedrock is overlain by terrace deposits, primarily clayey sand, with an average slope of inclination of about 55 degrees. The report indicates that without shoreline protection and stabilization of the bluff slope, bluff recession will undermine the 5th hole.

Geologic and seismic hazards identified by the geotechnical reports include the following:

1. The site is likely to be shaken by earthquakes of approximate magnitude of 7.5 with an average recurrence interval of between 138 and 188 years along the North Coast segment of the San Andreas. Earthquakes of magnitude 6 or 7 are also likely along many of the faults within the Monterey Bay area.
2. Slope stability under static conditions is marginal, but would become unstable during a seismic event or heavy precipitation event. Slope stability is greatly improved by the proposed seawalls, providing an acceptable factor of safety under both seismic and saturated conditions.
3. Significant erosion has occurred at the site due to basal wave attack, over-steepening of the bluff face, and from precipitation directly on the bluff face, which have caused slumping and debris flow landslides.
4. Wave run-up analysis indicates that infrequent, large waves may still overtop the 5th green seawall, but would occur infrequently, probably less than once per year on average.

Conclusions of the HKA 6/04 supplemental geotechnical report were that the coastal bluff repair project appears compatible with the site, providing recommendations made in the report were incorporated into the design and construction of the project. To ensure that the project is constructed consistent with geotechnical recommendations, it has been conditioned to require that geotechnical recommendations be incorporated and the geotechnical engineer be involved in the design and construction phases of the project. If any changes are required, any additional geotechnical recommendations or mitigation measures shall be submitted to the Executive Director for review and approval before their incorporation into the project.

Assumption of Risk

The experience of the Commission in evaluating the consistency of proposed developments with Coastal Act policies regarding development in areas subject to problems associated with geologic instability, flood, wave, or erosion hazard, has been that development has continued to occur despite periodic episodes of heavy storm damage, landslides, or other such occurrences. Oceanfront development is



susceptible to bluff retreat and erosion damage due to storm waves and storm surge conditions. Past occurrences statewide have resulted in public costs (through low interest loans, grants, subsidies, direct assistance, etc.) in the millions of dollars. As a means of allowing continued development in areas subject to these hazards while avoiding placing the economic burden on the People of the State for damages, the Commission has regularly required that Applicants acknowledge site geologic risks and agree to waive any claims of liability on the part of the Commission for allowing the development to proceed.

There are inherent risks associated with development on and around eroding bluffs in a dynamic coastal environment; this applies to the project proposed as well as for the development that is located landward of the shoreline. The proposed seawalls along the 5th hole shoreline, and all development inland of it, still has the potential to be affected by shoreline erosion in the future.

Although the Commission has sought to minimize the risks associated with the development proposed in this application, the risks cannot be eliminated entirely. Given that the Applicant has chosen to pursue the development despite these risks, the Applicant must assume these risks. Accordingly, this approval is conditioned for the Applicant to assume all risks for developing at this location (see Special Condition 14).

Monitoring, Maintenance, and Long-Term Stability

Since the proposed seawalls will be keyed into the existing bedrock, they are not likely to sink or move down slope due to gravity or undermining of unconsolidated sediments beneath them. It is thus expected that the seawalls will continue to provide shoreline protection throughout the life of the structures, estimated by the geotechnical report to be 50 years, as long as monitoring and maintenance activities are undertaken when necessary to ensure that the artificial rock fascia (colored and texturized concrete facing) and other structural components of the seawalls, wingwalls, and backfilled slope are repaired if necessary due to overtopping or impact from large rocks or marine debris. Therefore, the applicant has been required to develop a plan for long-term monitoring and maintenance of the seawalls to insure that they remain in their original location, and continue to function effectively (see Condition 7).

Furthermore, the backfilled slope and upper bluff soils above the 5th green seawall must be stabilized with vegetation appropriate to the site, and 5th green drainage shall continue to be controlled to ensure overall stability of the bluff edge. Long-rooted, non-invasive, native plant species suited for the site should be used for this purpose. In a bluff setting, these species can help to stabilize bluff soils, minimize irrigation of the bluff (again helping to stabilize the bluff), and can help to avoid bluff failure. They also create a more natural looking landform, which can help to offset the visual impacts of the seawall (see also Visual findings below).

Finally, in order to find the proposed project consistent with the Coastal Act, the Commission finds that the condition of the seawalls, and bluff plantings, in their approved state must be maintained for the life of the structure. Therefore, special conditions are attached to this approval for surveyed reference points to assist in evaluation of future proposals and monitoring at this site (see Special Conditions 6 and 7) and drainage and landscape plans for the engineered slope/revegetated bluff area (see Special Condition



1). The Applicant shall be responsible for ensuring adequate annual monitoring of the seawall and engineered backfill and is required to submit a monitoring report every five years that evaluates the condition and performance of the structures, and related drainage and vegetation elements, and to submit the report with recommendations, if any, for necessary maintenance, repair, changes or modifications to the project (see Special Condition 7). Furthermore, the permit has been conditioned to require that a deed restriction must be recorded to ensure that any future landowners are clearly notified of the conditions of this permit, particularly the public access mitigation requirements (in section 2, below) which run with the property.

d. Conclusion

As conditioned to require submittal of final engineered plans that incorporate all geotechnical recommendations (and that can be peer-reviewed by the Commission's coastal engineer), and as-built plans following construction, that require the geotechnical engineer be involved in the design and construction phases of the project, any additional geotechnical recommendations or mitigation measures shall be submitted to the Executive Director for review and approval before their incorporation into the project, long-term monitoring and maintenance to ensure the permitted structure remains effective and in its approved location, and for the Applicant to assume all risk and responsibility for development at this shoreline location, and as discussed above, the proposed project is consistent with Coastal Act Section 30253.

As discussed above, the facts of this particular case show that the proposed project is required to protect existing structures in danger from erosion and that, with incorporation of mitigation measures as described, is the least environmentally damaging, feasible alternative. The proposed project has been designed and conditioned to minimize (to the extent feasible) sand supply loss and beach encroachment, and mitigates for cumulative impacts by developing a Shoreline Management Plan for the Stillwater Cove area, conducting annual beach and bluff profiles between Stillwater Cove Pier and Arrowhead Point to monitor change in beach width and volume, and ongoing bluff recession, that may occur as a result of this project. Special conditions have also been applied for long-term maintenance of the seawalls, and assumption of risk. Thus, as conditioned, the proposed project can be found consistent with Coastal Act Sections 30235 and 30253 as discussed in this finding.

2. Public Access and Recreation

a. Issue

As discussed, the project includes new shoreline protection structures that will reduce the amount of sediment otherwise supplied to the beach, and fix the back beach area, which will change long-term erosion characteristics and result in a reduction of sandy beach area adjacent to the project site. Shoreline erosion continues, once the back beach is armored by the proposed seawalls, the beach in front of the structures will be lost over time because the back beach can no longer retreat landward. And once the beach in front of the seawalls is gone, the entire beach area from the 5th tee south will be unavailable as well, because lateral beach access to this area will no longer be possible once all beach in front of the



seawalls is lost. At a distance of approximately 700 feet and an average width of 68 feet, the project will ultimately result in the eventual loss of approximately 1.1 acres of public beach along with the associated recreational activities provided by this portion of Stillwater Cove Beach.

Due to the rocky headlands at either end of the beach and the steep bluffs that back the beach, access to Stillwater Cove Beach is only available through the Beach Club parking adjacent to the Stillwater Pier, to the north of the project area. No other roadway or trail connects Stillwater Cove to other roads or pedestrian paths in the area, and since the golf course and several residences are located between the beach and the nearest roadway at the south end of the beach, no other pedestrian route exists that would allow the public to reach the beach south of the proposed shoreline structures.

Because of its location, orientation, scenic character, and availability to the public, the beach at Stillwater Cove is an exceptionally beautiful coastal location and a highly valued public recreational site for low cost public access to the shoreline. And because most of the shoreline in the Del Monte Forest is a rocky shoreline, sandy pocket beaches are rare and of limited extent. As discussed previously, because of the unique composition of the beach sands, and the sensitive nearshore habitat adjacent to the site, beach renourishment is not feasible at this time. Therefore, loss of beach area at Stillwater Cove will be a significant impact of the project, and will reduce or eliminate valuable public access opportunities provided adjacent to and down coast of the project site.

b. Relevant Regulatory Policies

Coastal Act Section 30604(c) requires that every coastal development permit issued for any development between the nearest public road and the sea includes a specific finding that the development is in conformance with the public access and recreation policies of Chapter 3 of the Coastal Act.

Coastal Act Sections 30210 through 30213, 30220 and 30224 specifically protect public access and recreation. In particular:

30210: In carrying out the requirement of Section 4 of Article X of the California Constitution, maximum access, which shall be conspicuously posted, and recreational opportunities shall be provided for all the people consistent with public safety needs and the need to protect public rights, rights of private property owners, and natural resource areas from overuse.

30211. Development shall not interfere with the public's right of access to the sea where acquired through use or legislative authorization, including, but not limited to, the use of dry sand and rocky coastal beaches to the first line of terrestrial vegetation.

Section 30212. (a) Public access from the nearest public roadway to the shoreline and along the coast shall be provided in new development projects except where:

(1) It is inconsistent with public safety, military security needs, or the protection of fragile coastal resources,



(2) Adequate access exists nearby, or,

(3) Agriculture would be adversely affected....

Section 30213: *Lower cost visitor and recreational facilities shall be protected, encouraged, and, where feasible, provided. Developments providing public recreational opportunities are preferred. ...*

Section 30220. *Coastal areas suited for water-oriented recreational activities that cannot readily be provided at inland water areas shall be protected for such uses.*

Additional Coastal Act policies that provide for maximizing public access and recreational opportunities also include Section 30251 regarding the protection of scenic views (see Visual Resources finding below).

c. Analysis of Public Access and Recreation

Beach Access and Low-Cost Recreational Opportunities

The Pebble Beach area provides numerous public access and recreational opportunities of regional and statewide significance. Within Del Monte Forest, Pebble Beach is the main commercial enclave (with shops, restaurants, and other amenities available to the general public and casual visitor (i.e., non-resort guest). The Equestrian Center is located here, as is the 9-hole "Peter Hay Golf Course" that provides low cost golfing use for the general public (approximately \$15-\$20 per round).

The Pebble Beach Golf Links (PBGL golf course, which is rated the top publicly available course in the nation, provides for limited public recreational use along much of the Pebble Beach coastal area, including the 5th hole site. However, rates for daily use of the course are several hundreds of dollars (\$395, including cart fee, for resort guests, and \$395 + cart fee of \$25 per player for non-resort guests), so access in these areas is limited to those able to afford such prices. The beach below the 5th hole and along Stillwater Cove, between the Stillwater Cove Pier and Arrowhead Point, is available for public use, once an entry fee of \$8.50 is paid for vehicular entry on 17 Mile Drive (pedestrian and bicycle access on 17-Mile Drive is free). Access to 17-Mile Drive, and thus to Stillwater Cove, is also sometimes restricted, based on an agreement with the County, during large temporary events (e.g., during the ATT Golf Tournament).

Public access to the shoreline at Stillwater Cove, as well as most of the low-cost coastal access in Del Monte Forest, was formalized through the Coastal Commission's approval of the Spanish Bay Resort (CDP#3-84-226; approved March 1985).¹⁰ The Spanish Bay Resort is located north of the Pebble Beach Golf Links course, and is also owned and operated by the Pebble Beach Company. The Stillwater Cove

¹⁰ Public access at Stillwater Cove and the surrounding Lodge area was further enhanced by the Commission's approval of the Casa Palmero project in 1997 (CDP A-3-MCO-97-037) in which the Commission required a lodge area path and parking system for the public. Although there continue to be issues related to condition compliance with regards to these permits, staff continues to work with the Pebble Beach Company in resolving these issues.



public access area (identified as location 12 on the Del Monte forest LUP Shoreline Access Map; see Exhibit K) is used for day beach use, as well as for diving and boating, and includes public parking in the lots near the 17th fairway and Pebble Beach Tennis Club, an equipment and passenger drop-off zone near the pier, a ramp/stairway for access to the shoreline, and recently improved public restrooms that include showers for divers. The shoreline in this area has been armored over time and little to no sandy beach remains. Existing recreational activities occurring along the public portion of Stillwater Cove Beach east of Stillwater Pier include sunbathing, reading, relaxing, jogging, and walking on the sandy beach that extends approximately 1,300 feet east/southeast of the accessway located just west of the pier to the first outcroppings of Arrowhead Point.

The proposed seawall will halt erosion and armor the coastal bluff in the vicinity of the 5th hole, thus benefiting public recreational use of the golf course. However, as described in Section E.1 above, the project will also result in a reduction of sandy beach width at the site due to passive erosion, and so will reduce the amount of lower-cost coastal access and recreational opportunities available to a larger population of the general public. As described above, the total area of beach lost in front of the two seawalls will be approximately 7,290 sf (or 0.17 acres), using a shoreline erosion rate of 0.6 ft/yr over 50 years and 9,963 sf. (or 0.23 acres), using a shoreline erosion rate of 0.82 ft/yr over 50 years. Using an average shoreline erosion rate of 0.7, and average beach width of 68 feet, it is expected that within 97 years, the entire beach in front of the seawalls will be gone, and, as a result, the entire beach area south of the seawalls (approximately 700 linear feet of beach) will be unavailable as well, since through lateral access to this area will no longer exist. Given an average width of 68 feet and approximately 700 linear feet of beach south of these structures, the project will ultimately result in the loss of just over one acre (1.1 acres) of beach area due to armoring of the bluffs.

The impacts of hardening the shoreline in this area are thus both direct and indirect, leading to significant negative public access impacts (e.g., loss of sand to the system overall, loss of beach space over time at the site as well as down-coast of the site, loss of lateral access along the beach, loss of low-cost recreation in an otherwise generally high-cost area, loss of beach ambience, and loss of aesthetics during construction). Therefore, if the proposed project is to be approved, then mitigation for this beach loss, and the related loss of low-cost public recreational opportunities and coastal access is necessary. Such mitigation needs to be related and proportional to the public access impacts. Although staff has discussed potential mitigation requirements with the applicant, no specific mitigation measures have been offered to date.

As described previously, because of continued sea level rise and potential impacts to sensitive marine habitats immediately offshore, as well as uncertainty about the effectiveness and availability of appropriate sand sources, beach renourishment at Stillwater Cove is not considered to be a feasible alternative mitigation measure at this point in time. Since it may be impossible to replace the beach lost at the site itself, a second alternative would be to obtain additional access to some other currently inaccessible or under-utilized beach area within the vicinity of the project.

The Del Monte Forest LUP Shoreline Access map identified 12 access points (as shown on Exhibit K) and Del Monte Forest LUP Policy 145 requires that improvements be made at these 12 designated areas



as part of new development projects. As noted in Periodic Review findings, while eleven of the twelve access points have been developed and/or formalized as part of the Spanish Bay permit, the Carmel Beach access area (identified as number 11 on the Del Monte Forest Shoreline Access Map; see Exhibit K) has not yet been accomplished. Since this site is located in the vicinity of Stillwater Cove, and would provide additional low-cost recreational beach access, to an area of beach that is currently underutilized, completion of this access could serve as mitigation proportional to what would be lost at Stillwater Cove Beach as a result of the proposed project. Furthermore, since all the roads in Del Monte Forest are owned by the Pebble Beach Company, and thus are not considered as public roads, the nearest public road to the project area is North San Antonio Road in the City of Carmel-by-the-Sea. Since North San Antonio Road becomes Carmel Way in Del Monte Forest, once north of the city limit line, access between Carmel Way and Carmel Beach would provide public access between the nearest public road (North San Antonio Road via Carmel Way) and the shoreline in this area.

Provision of a new accessway to the northern end of Carmel Beach, will maximize public access to a portion of Carmel Beach not commonly used by the public, as the nearest existing access is located at the foot of Ocean Avenue, approximately 1,000 ft to the south and not immediately apparent to the public. Provision of the connecting trail segment between Carmel Way and Carmel Beach is currently the missing link that would allow through lateral access from the Del Monte Forest planning area to the City of Carmel-by-the-Sea, and on to the unincorporated Carmel land use area. This access way would also be part of the Del Monte Forest trail system that exists throughout the forest as shown in Exhibit L.

Such a trail link would also provide continued lateral access along the conceptual California Coastal Trail (CCT) route in this area, providing lateral access from the Pebble Beach area to Carmel and beyond. Through lateral access does not appear feasible at the south end of Stillwater Cove, due to the rocky headland at Arrowhead Point and the lack of available public access through the golf course and adjacent residential areas. Thus the conceptual alignment of the CCT in this area must go inland along 17-Mile Drive, to Ocean Avenue before it reunites with the shoreline. However, through lateral access for the CCT would be available along the shoreline between the Del Monte Forest and Carmel area once the Carmel Beach accessway was formalized.

Improvements required by Policy 145 for the Carmel Beach access area include an access trail and require dedication and improvement as a condition of development approval on any affected parcel. While the site-specific design criteria in the Appendix B of the Del Monte Forest LUP shows the proposed accessway going along a private residential driveway, east of Pescadero Creek, existing residential development prohibits the possibility of such a trail alignment. However, the actual alignment of the historic Redondo Trail in this area, which was used by both pedestrians and equestrians since the early days of the Del Monte Hotel (c.a. 1930's), is along the existing maintenance road that borders the southern end of the Pebble Beach Golf Links course, and along the edge of the course adjacent to the Pescadero Creek ravine and then down the right bank of the Pescadero Creek ravine to Carmel Beach near the mouth of Pescadero Creek (as shown in Exhibit M).¹¹ Since the Pebble Beach Golf Links property boundary extends along the top of the bluff adjacent to the Pescadero Creek ravine,

¹¹ There may be prescriptive rights to the historic Redondo Trail that have not yet been documented and perfected.



formalization of an accessway along this southern property boundary would allow for a connection between Carmel Way and Carmel beach. However, since that portion of the trail that presently leads down to Carmel Beach along the right bank of the Pescadero Creek ravine is on an adjacent private property, to ensure that the accessway remains open and accessible in perpetuity as part of this permit, it is necessary to require the applicant construct a new stairway along the face of the coastal bluff in order to get from the blufftop down to the beach (along Route A, as shown in Exhibit M), unless some agreement can be reached with the adjacent property owner to provide such access in perpetuity on the existing trail (along alternate Route B, as shown in Exhibit M).

Thus, in order to mitigate for lost beach and low-cost recreational use of Stillwater Cove, and to maximize public access and low-cost recreational use of other beach areas in the vicinity of the Pebble Beach Golf Links, this project is conditioned to provide public access between Carmel Way and Carmel Beach, along or in close proximity to the historic Redondo trail, by: (1) preparing and implementing a Trail Improvement Plan to provide a pedestrian accessway between Carmel Way and Carmel Beach as shown in Exhibit M, either along Alignment A (from Point A to Point C1), or, if possible through negotiations with the adjacent property owner, along alternate Route B (From Point A to Point B and then to Point C2), consistent with trail standards identified in the Del Monte Forest LUP, with stairway segments, if necessary, to get from blufftop to beach, that includes provisions for public safety and landscape screening; (2) developing and implementing a signage plan to direct public access from Carmel Way to Carmel Beach via the accessway; and (3) revising the map handouts given to visitors to clearly indicate the Carmel Beach access location in the same size and manner as used for all other access points shown on the map. In addition, the applicant shall be required to execute and record a deed restriction that identifies that all conditions required by this permit shall continue to run with the land as long as the development allowed by the permit remains in existence.

The Pebble Beach Company has expressed concerns regarding pedestrian safety along the trail since it would be located in close proximity to existing golf play; however, examples of public pedestrian trails at other golf courses (e.g., Half Moon Bay Golf Course, Spanish Bay Golf Course, etc) show that various approaches (including, but not limited to use of small berms, protective fencing and landscape screening) can be taken to resolve these user conflicts, even where a trail may actually extend across the golf course (see Exhibit O). Therefore, to provide for public safety, the permit requires construction of fencing or other structures, and signage as necessary to provide for pedestrian safety, and allows landscape screening to soften views of the structures as seen from the trail and adjacent recreational and residential uses.

Construction Activities

Some impacts to public access on Stillwater Beach will occur as a result of construction activities, but are expected to be of limited duration. To minimize such impacts, this permit requires that construction and demolition operations are limited to weekdays, between the hours of 7am to 4pm in order to avoid conflicts with continued public use of the beach on weekends and holidays, and that the project site and construction staging and storage areas be marked off with protective fencing for safety.



d. Public Access Conclusion

As proposed and conditioned by this permit, the project provides mitigation to maximize recreational and public access opportunities consistent with Coastal Act Sections 30210, 30211, 30212, 30213, and 30220. Therefore, as conditioned to complete the Carmel Beach access way between Carmel Way and Carmel Beach, and to limit times for construction to minimize conflicts with beach users, the proposed project will maximize public access consistent with the public access and recreation policies of the Coastal Act.

3. Marine Resources and Environmentally Sensitive Habitats**a. Issue**

The project involves construction activities that may adversely impact environmentally sensitive habitat areas and other marine resources, as well as adversely affect water quality. Construction equipment and activities conducted on the beach may impact intertidal habitat due to burial or reduction in water quality due to inadvertent discharge of construction materials, fuel or sediment. Similarly, construction equipment and activities conducted atop the eroding coastal bluff may impact upland plant and wildlife habitat.

b. Relevant Regulatory Policies

Coastal Act Sections 30230 and 30231 require that:

Section 30230. Marine resources shall be maintained, enhanced, and where feasible, restored. Special protection shall be given to areas and species of special biological or economic significance. Uses of the marine environment shall be carried out in a manner that will sustain the biological productivity of coastal waters and that will maintain healthy populations of all species of marine organisms adequate for long-term commercial, recreational, scientific, and educational purposes.

Section 30231. The biological productivity and the quality of coastal waters, streams, wetlands, estuaries, and lakes appropriate to maintain optimum populations of marine organisms and for the protection of human health shall be maintained and, where feasible, restored through, among other means, minimizing adverse effects of waste water discharges and entrainment, controlling runoff, preventing depletion of ground water supplies and substantial interference with surface water flow, encouraging waste water reclamation, maintaining natural vegetation buffer areas that protect riparian habitats, and minimizing alteration of natural streams.

Coastal Act Section 30240 and 30255 require that:

Section 30240(a). Environmentally sensitive habitat areas shall be protected against any significant disruption of habitat values, and only uses dependent on those resources shall be allowed within those areas.



Section 30240(b). Development in areas adjacent to environmentally sensitive habitat areas and parks and recreation areas shall be sited and designed to prevent impacts which would significantly degrade those areas, and shall be compatible with the continuance of those habitat and recreation areas.

c. Analysis of Consistency with Applicable Policies

Coastal Act Section 30230 calls for the maintenance, enhancement and restoration (where feasible) of marine resources, with special emphasis on areas and species of special biological or economic significance. Coastal Act Section 30231 provides that the biological productivity of coastal waters, streams, wetlands, estuaries, and lakes must be maintained and, where feasible, restored. This is to be achieved by, among other means: minimizing adverse effects of wastewater discharges and entrainment; controlling runoff; preventing depletion of groundwater supplies and substantial interference with surface water flow; encouraging wastewater reclamation; maintaining natural buffer areas that protect riparian habitats; and minimizing alteration of natural streams. Coastal Act Section 30240 prohibits any significant disruption of habitat values, and limits development within ESHA to uses that are dependent on the resources. It also requires that development adjacent to ESHA be sited and designed to prevent significant degradation, and be compatible with the continuance of the habitat.

The biological setting and assessment of potential project impacts of the 5th hole seawalls are described in the biological reports prepared by Zander and Associates, dated June 24, 2004 (ZA 6/04; a separate report was given for the 5th tee seawall and the 5th green seawall). These ZA 6/04 reports update earlier reports, dated December 10, 2003, in order to evaluate project impacts based on the most recent plans dated 5/28/04.

The ZA 6/04 biological reports describe the 5th tee bluff site as having sparse vegetation with several erosional gullies. Vegetation along the 5th tee bluff area is dominated with iceplant, but also includes poison oak and a few Monterey pine seedlings. No special status plant or animal species, other than the Monterey pine seedlings, were found in the 5th tee project area.

The 5th green site includes a combination of native and non-native landscape species, many of which were planted in 1998/1999 as part of the erosion control and landscape restoration plan approved by the County for the new 5th hole. Vegetation along the 5th green bluff includes mostly grasses and herbaceous species, but also includes 2 live oak seedlings, and 2 shrubby willows at the toe of the slope. Grasses found on site include invasive non-native kikuyu grass, and other native grasses such as western fescue, tufted hairgrass dune grass and purple needle grass.

Additionally, approximately 20 dune buckwheat plants exist on the 5th green bluff site, which were also apparently planted as part of the landscape restoration plan when the new 5th hole was constructed. The dune buckwheat plant is one of two host plant species on which the endangered Smith's blue butterfly (*Euphilotes enoptes smithii*) associates, throughout its entire life cycle, and so, as critical habitat for this rare and endangered species, is considered environmentally sensitive habitat. The biological reports state that although Smith's blue butterflies were introduced into the area as part of the 1999 restoration,



none were observed on site during field visits. The nearest recorded population is Point Lobos, over 5 miles from the site. However, since the dune buckwheat provides critical habitat for this species, the project has been conditioned to replace these plants during revegetation of the 5th green slope, with a 2:1 replacement ratio, in order to restore and protect the long-term maintenance of Smith's blue butterfly habitat that might be impacted by the required shoreline protection structures (see Condition 1c).

The beach area below the 5th tee and 5th green does not support any coastal marsh or wetland species, and does not have a sufficient backbeach area to allow for dune formation. Shorebirds have been seen foraging at the tide line nearby both the 5th tee and 5th green areas, however, while the bluffs may provide resting and perching sites, because of their steep and erosional character, they do not provide suitable nesting or foraging habitat. It is also possible that the southern Pacific sea otter (*Enhydra lutris*) may make use of the protected rocky nearshore area, though none were observed during field visits.

No construction activities will occur below the mean high tide line. However, since construction activities will occur on the beach, it is possible that such activities, as well as those occurring atop the bluff, may have the potential to impact marine resources by inadvertently discharging sediment or construction materials into the waters of Stillwater Cove, which is also part of the Monterey Bay National Marine Sanctuary (MBNMS). Permit conditions thus require evidence of conformance with MBNMS requirements or evidence that no such compliance is required.

As described previously, a construction management plan shall be required to show all BMPs to be used to prevent this from occurring (see Special Condition 3). BMPs shall include, but not be limited to placing coir rolls and/or silt fabric around the project construction area to keep sediment and construction debris from entering the intertidal zone. In order to protect water quality of Stillwater cove, the construction management plan shall also include adequate measures to avoid accidental spills of petroleum products or hazardous substances. Heavy equipment used on the beach shall remain above mean high tide at all times. Heavy equipment used for concrete pouring will be located on the coastal terrace, and required to be set at least 50 feet landward of the blufftop. Other heavy equipment, which may be used atop the coastal bluff, will be required to be removed from the blufftop when not in use. All heavy equipment and project construction materials shall be stored in the construction staging areas shown on Exhibit I. All areas of beach disturbed by construction activities shall be restored to their original pre-construction condition (See Special Condition 3).

The 5th green bluff shall be revegetated to reduce the potential for erosion in this area, and will be replanted with native vegetation appropriate to the site, including replacement planting of 40 dune buckwheat plants, according to a landscape plan that has been reviewed and approved by the Executive Director. Revegetation efforts may include erosion control fabric and straw mulch and seeding using native dune grass, wild rye and tufted hairgrass.

d. Conclusion

As designed and conditioned to require a construction management plan, including implementation of BMPs to prevent the inadvertent discharge of debris into the intertidal zone, and to prevent accidental



spills of petroleum products or hazardous substances, restoration of the 5th green bluff face with native vegetation suitable to the site, and restoration of beach areas disturbed by construction, no significant disruption of environmentally sensitive habitat will result. Thus with the inclusion of mitigation measures designed to prevent adverse impacts from construction activities, and to protect environmentally sensitive habitats and resources of the marine environment, the project does conform to the environmentally sensitive habitat and biological resource protection requirements of Coastal Act Sections 30230, 30231, and 30240.

4. Visual Resources

a. Issue

The 5th hole and coastal bluffs are located in a scenic coastal area, and proposed development could affect the scenic resources of Stillwater Cove and beach.

b. Relevant Regulatory Policies

Coastal Act Section 30251 requires that:

Section 30251. The scenic and visual qualities of coastal areas shall be considered and protected as a resource of public importance. Permitted development shall be sited and designed to protect views to and along the ocean and scenic coastal areas, to minimize the alteration of natural land forms, to be visually compatible with the character of surrounding areas, and, where feasible, to restore and enhance visual quality in visually degraded areas. New development in highly scenic areas such as those designated in the California Coastline Preservation and Recreation Plan prepared by the Department of Parks and Recreation and by local government shall be subordinate to the character of its setting.

Additionally, Coastal Act Section 30253(5) states that:

Section 30253(5). Where appropriate, protect special communities and neighborhoods, which, because of their unique characteristics, are popular visitor destination points for recreational uses.

c. Analysis of Visual Resources

The project is located along the very scenic shoreline of Stillwater Cove, and is in an area shown on the Del Mont Forest LUP Visual Resources map as a scenic shoreline area visible from 17-Mile Drive and Point Lobos, across Carmel Bay. The Coastal Act requires that scenic and visual resources be protected by minimizing landform alteration, and by siting and designing development to be visually compatible with the character of the surrounding areas. Del Monte Forest LUP policies also require that new development not detract from scenic shorelines, and that structures be subordinate to and blended into



the environment, using appropriate materials to achieve that effect (LUP Policy #56) and utilize native vegetation and topography to provide screening (LUP Policy #57),

As described previously, the project has been designed to minimize landform alteration by its vertical, reinforced concrete design, and use of tiebacks to retain a close proximity to the base of the bluff and to conform to the existing bluff face as much as possible. The project will also use artificial stone fascia on the face of the seawall, using concrete that will be colored and texturized to match the stratigraphy and visual character of the bluff face. A visual simulation of the existing and post-construction bluff faces are shown in Exhibit H. Examples of similar work already constructed in other nearby areas are provided in Exhibit J. As shown in these examples, the stone fascia covering will enable the 5th hole seawall structures to be subordinate to and blend in to the surrounding bluff face, so that they are visually compatible with the character of the surrounding area. Since the actual visual compatibility will depend on the end results of the project and how well it is maintained, the permit has been conditioned to require photo documentation of the seawalls at the end of construction and maintenance of the structures over time. The project also includes use of native vegetation on the slope above the 5th green seawall, and areas for planting vegetation at the 5th tee seawall, which will help these areas to further blend in with the appearance of the surrounding bluffs. And as the seawalls do not extend above the bluff top or out significantly from the bluff face, they will not block any public views.

Since the proposed project will not significantly alter scenic public views because it has been designed to minimize visual impacts, and will preserve the scenic character of the Stillwater Cove area, the Commission finds that this project is consistent with Section 30251 and 30253(5) of the Coastal Act.

5. Archaeological Resources

a. Issue

Archaeological resources are known to exist near the 5th Tee, and could be impacted by project activities.

b. Relevant Archaeological Resources Policies

Section 30244 of the Coastal Act states:

Where development would adversely impact archaeological or paleontological resources as identified by the State Historic Preservation Officer, reasonable mitigation measures shall be required.

The Del Monte Forest Land Use Plan also provides guidance on this topic as follows:

LUP Policy 60. The timely identification and evaluation of archaeological, historical, and paleontological resources is encouraged, in order that these resources be given full consideration during the conceptual design phase of land use planning for project development.



LUP Policy 61. Whenever development is proposed, it shall be determine whether the affected property has received an archaeological survey... The survey should describe the sensitivity of the site and make appropriate recommendations concerning needed protection of the resource.

LUP Policy 63. When developments are permitted on parcels where archaeological or other cultural resource sites are located, project design shall be required which avoids impacts to such sites....:

c. Archaeological Resources Analysis

A letter report, submitted by the Archaeological Consultant, Gary Breschini (dated September 11, 2003), in response to the emergency rip-rap bluff stabilization project permitted under CDP 3-03-111-G, indicates that archaeological reconnaissance and monitoring was conducted during original construction of the 5th hole at the top of the bluff to protect midden remains located in an archaeological easement on the residential parcel located nearest the 5th tee. Monitoring conducted during grading for the 5th hole found only sparse cultural materials along the top of the bluff; and the soils containing those cultural materials was subject to extensive disturbance and removal; noting that no potentially significant cultural materials were believed to remain at the top of the eroding bluff. The report also noted that work done for the emergency bluff stabilization would occur at depths below the deepest midden development in this site, and so concluded that bluff stabilization should not be delayed for archaeological reasons.

The proposed project includes only minor grading, with seawalls set against the bluff face. However, since construction activities may unearth previously undisturbed materials, the project has been conditioned to halt work and prepare and implement an archaeological mitigation plan if archaeological resources are encountered.

Therefore, as conditioned to require suspension of work and development of a mitigation plan if archaeological materials are found, the proposed development is consistent with Section 30244 of the Coastal Act and approved LUP archaeological resource policies.

6. California Environmental Quality Act (CEQA)

Section 13096 of the California Code of Regulations requires that a specific finding be made in conjunction with coastal development permit applications showing the application to be consistent with any applicable requirements of CEQA. Section 21080.5(d)(2)(A) of CEQA prohibits a proposed development from being approved if there are feasible alternatives or feasible mitigation measures available, which would substantially lessen any significant adverse effects which the activity may have on the environment. Beyond this, the Secretary of Resources has certified the Coastal Commission's review and analysis of land use proposals as being the functional equivalent of environmental review under CEQA.

In the course of application review, several potential environmental impacts were identified and are discussed in this staff report, which is incorporated in this finding. These include, but are not limited to, potential erosion and sedimentation into waters of the Monterey Bay National Marine Sanctuary, loss of



sand supply for beach nourishment, loss of coastal access and loss of public recreational use of the beach adjacent to the project site. Accordingly, the Commission finds that only as conditioned by this permit will the proposed project not have any significant adverse effects on the environment within the meaning of CEQA.



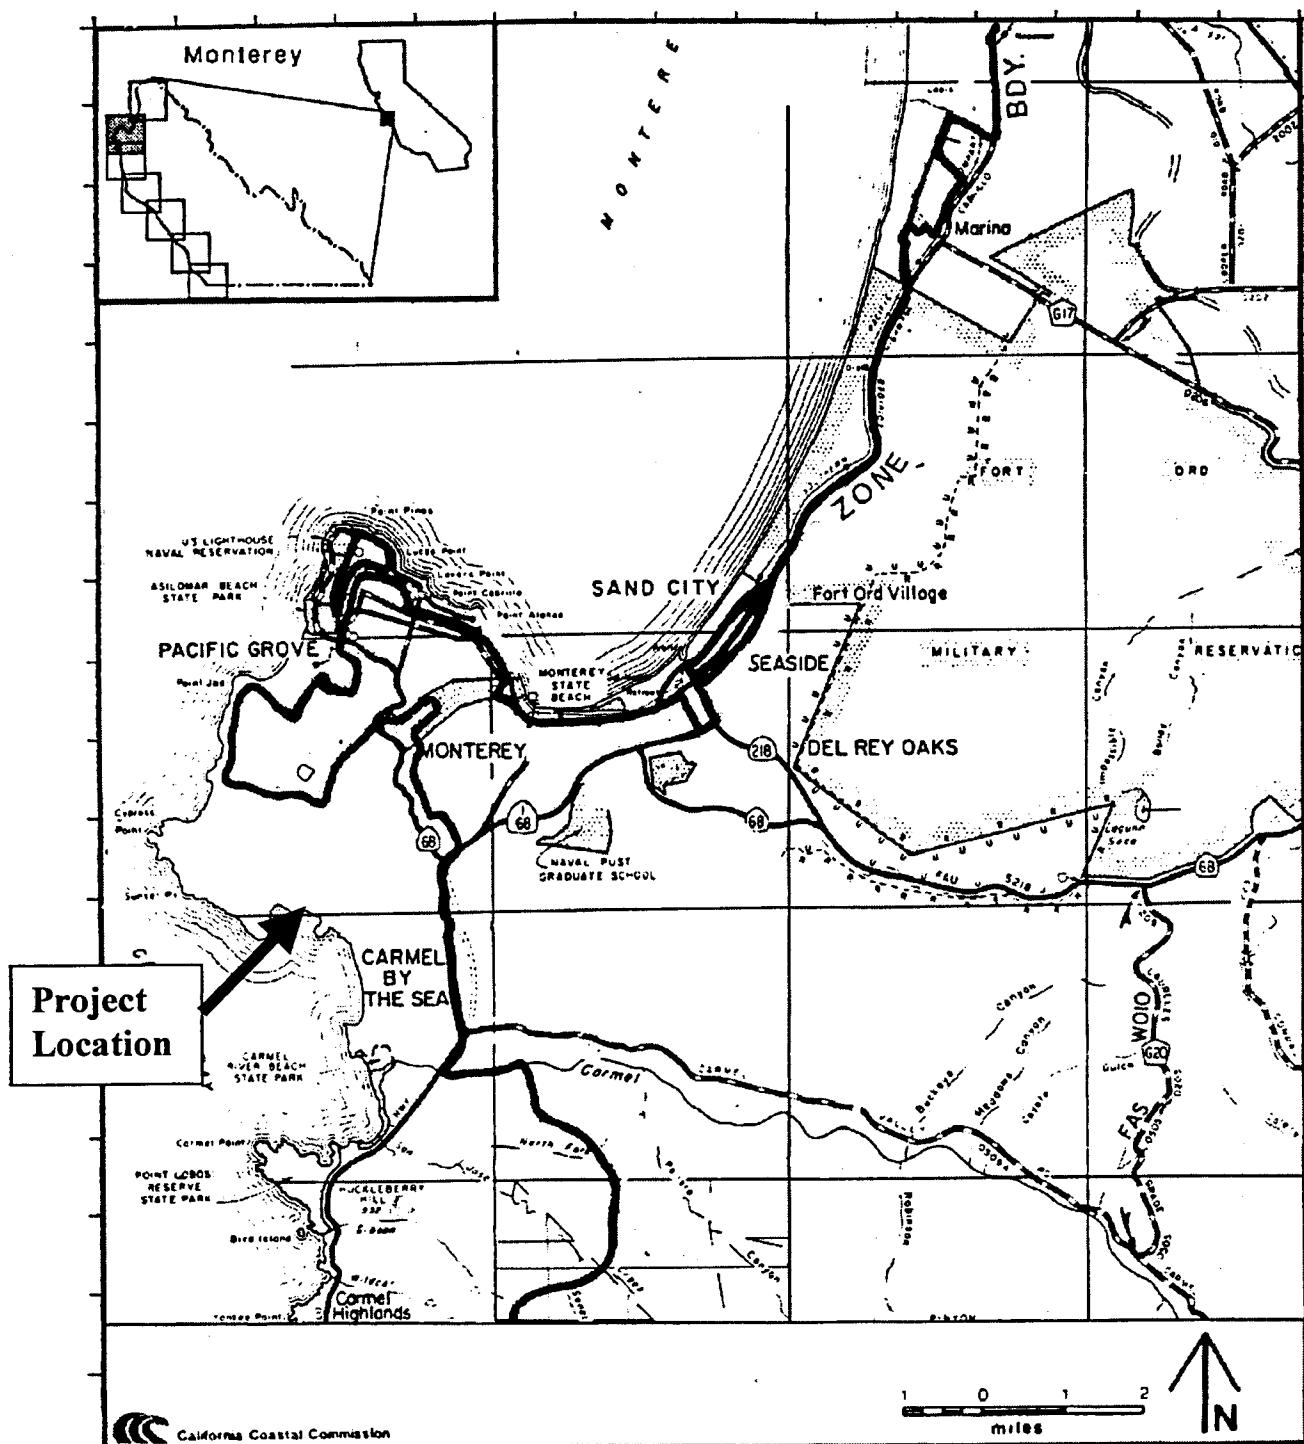


Exhibit A
Regional Location Map



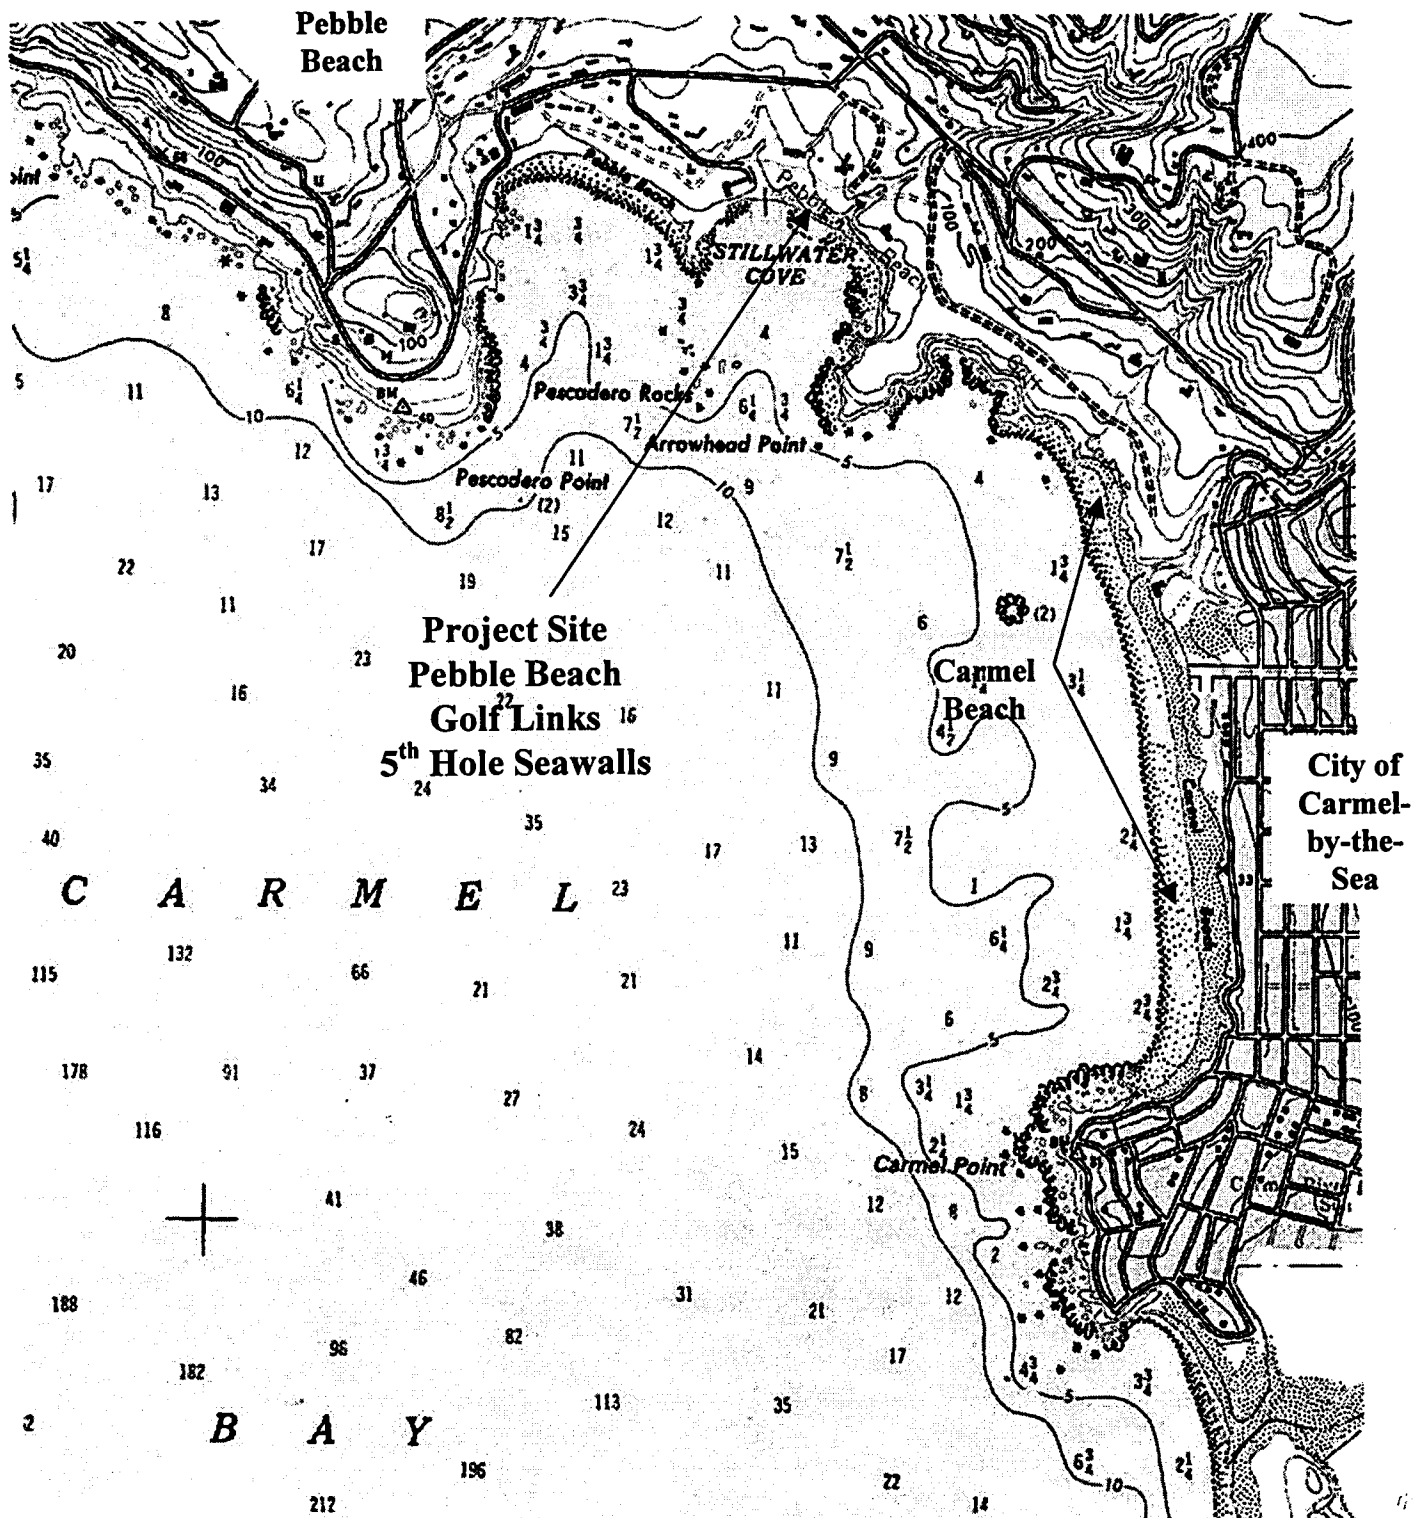


Exhibit B
Vicinity Map
Pebble Beach, Stillwater Cove and Carmel



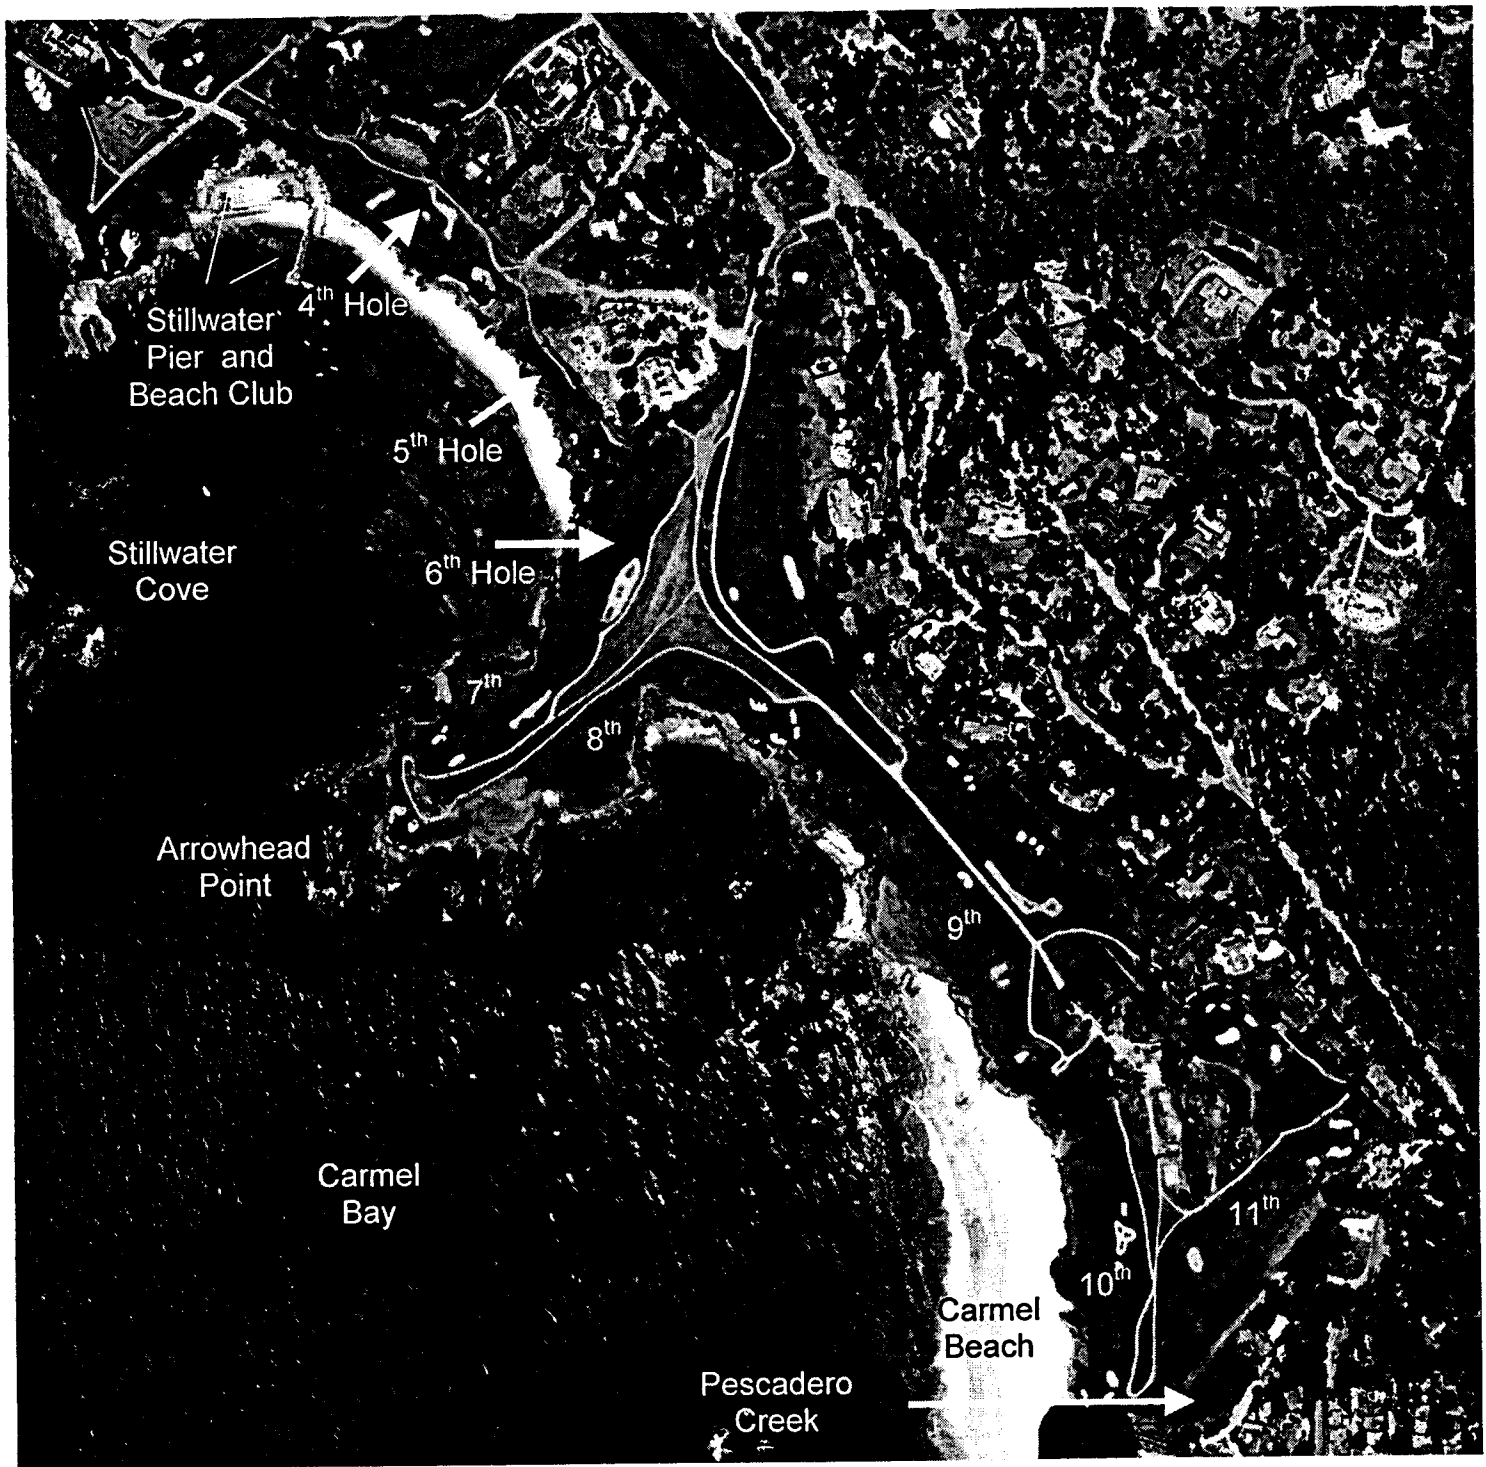


Exhibit C

2001 Aerial Photo – showing layout of Pebble Beach Golf Links in project vicinity (between Stillwater Cove and Pescadero Creek)

3-04-030

Pebble Beach Golf Links 5th Hole Seawalls



California Coastal Commission


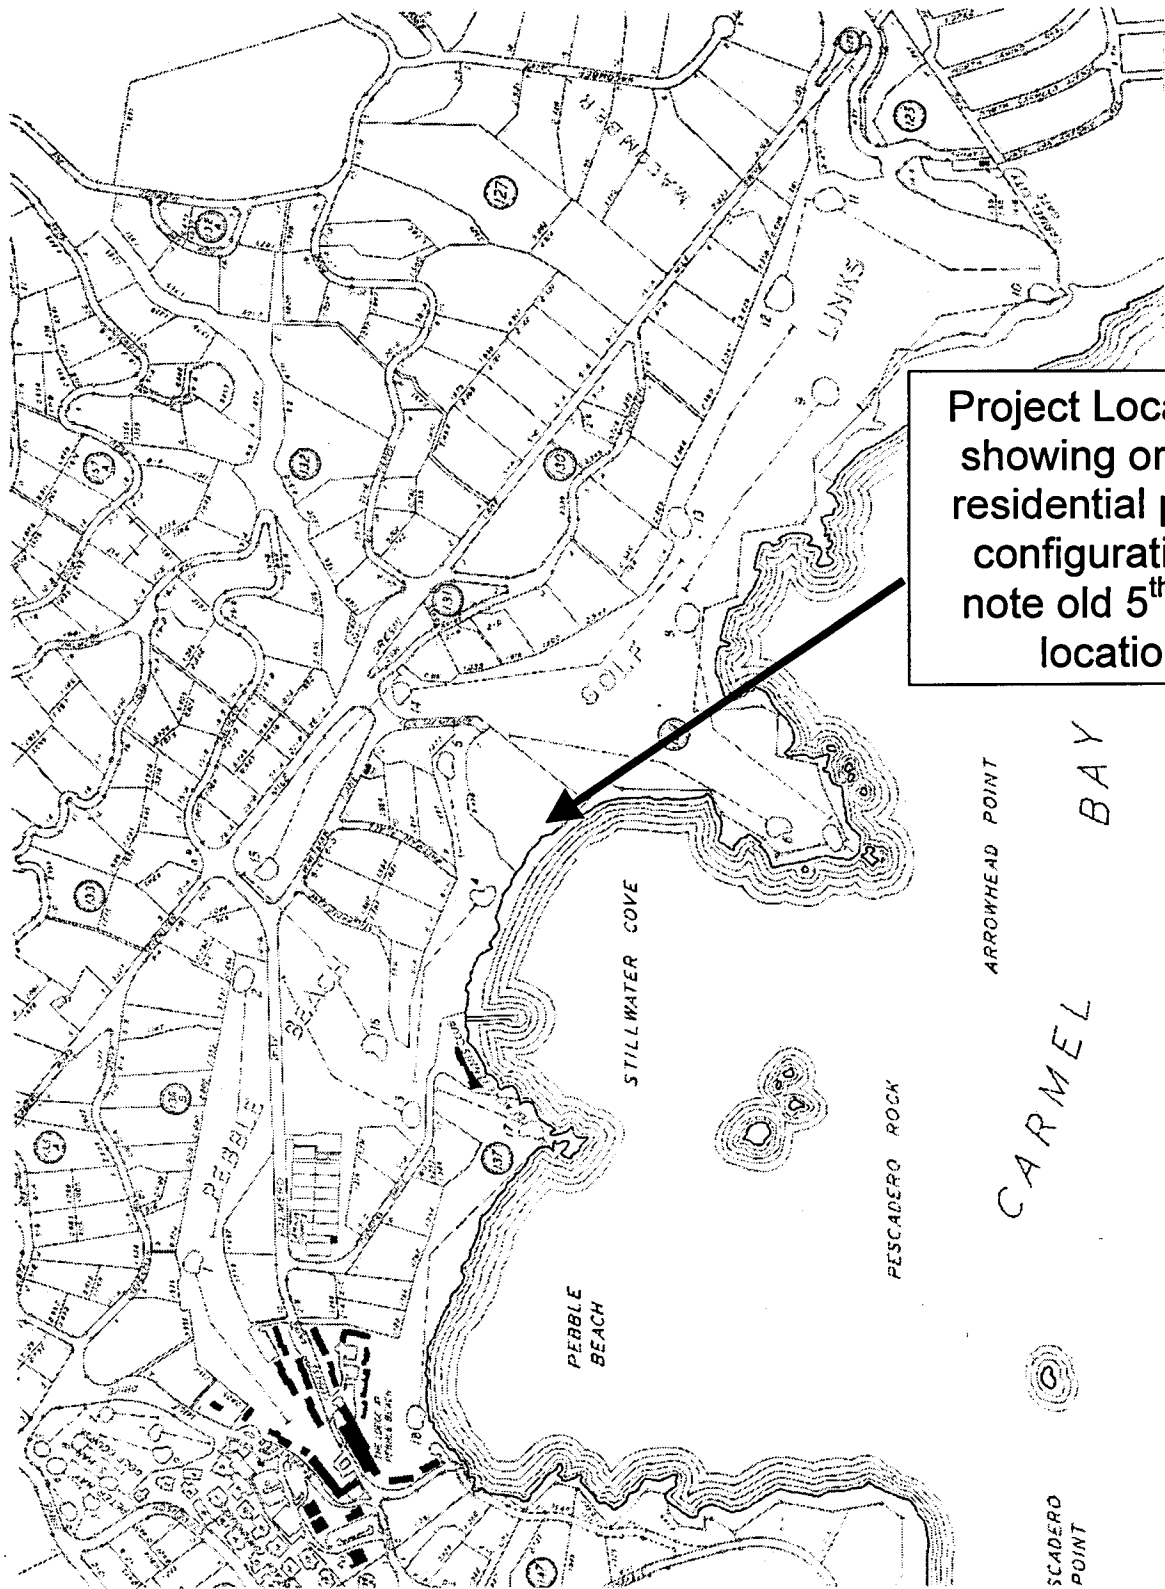


Exhibit D - pg 1 of 2

Early Assessors Parcel Map of Pebble Beach Area, showing original residential parcel and old 5th hole alignment.





Current Assessors Parcel Map – showing new residential lot configuration and new 5th hole parcel on APN 008-403-003

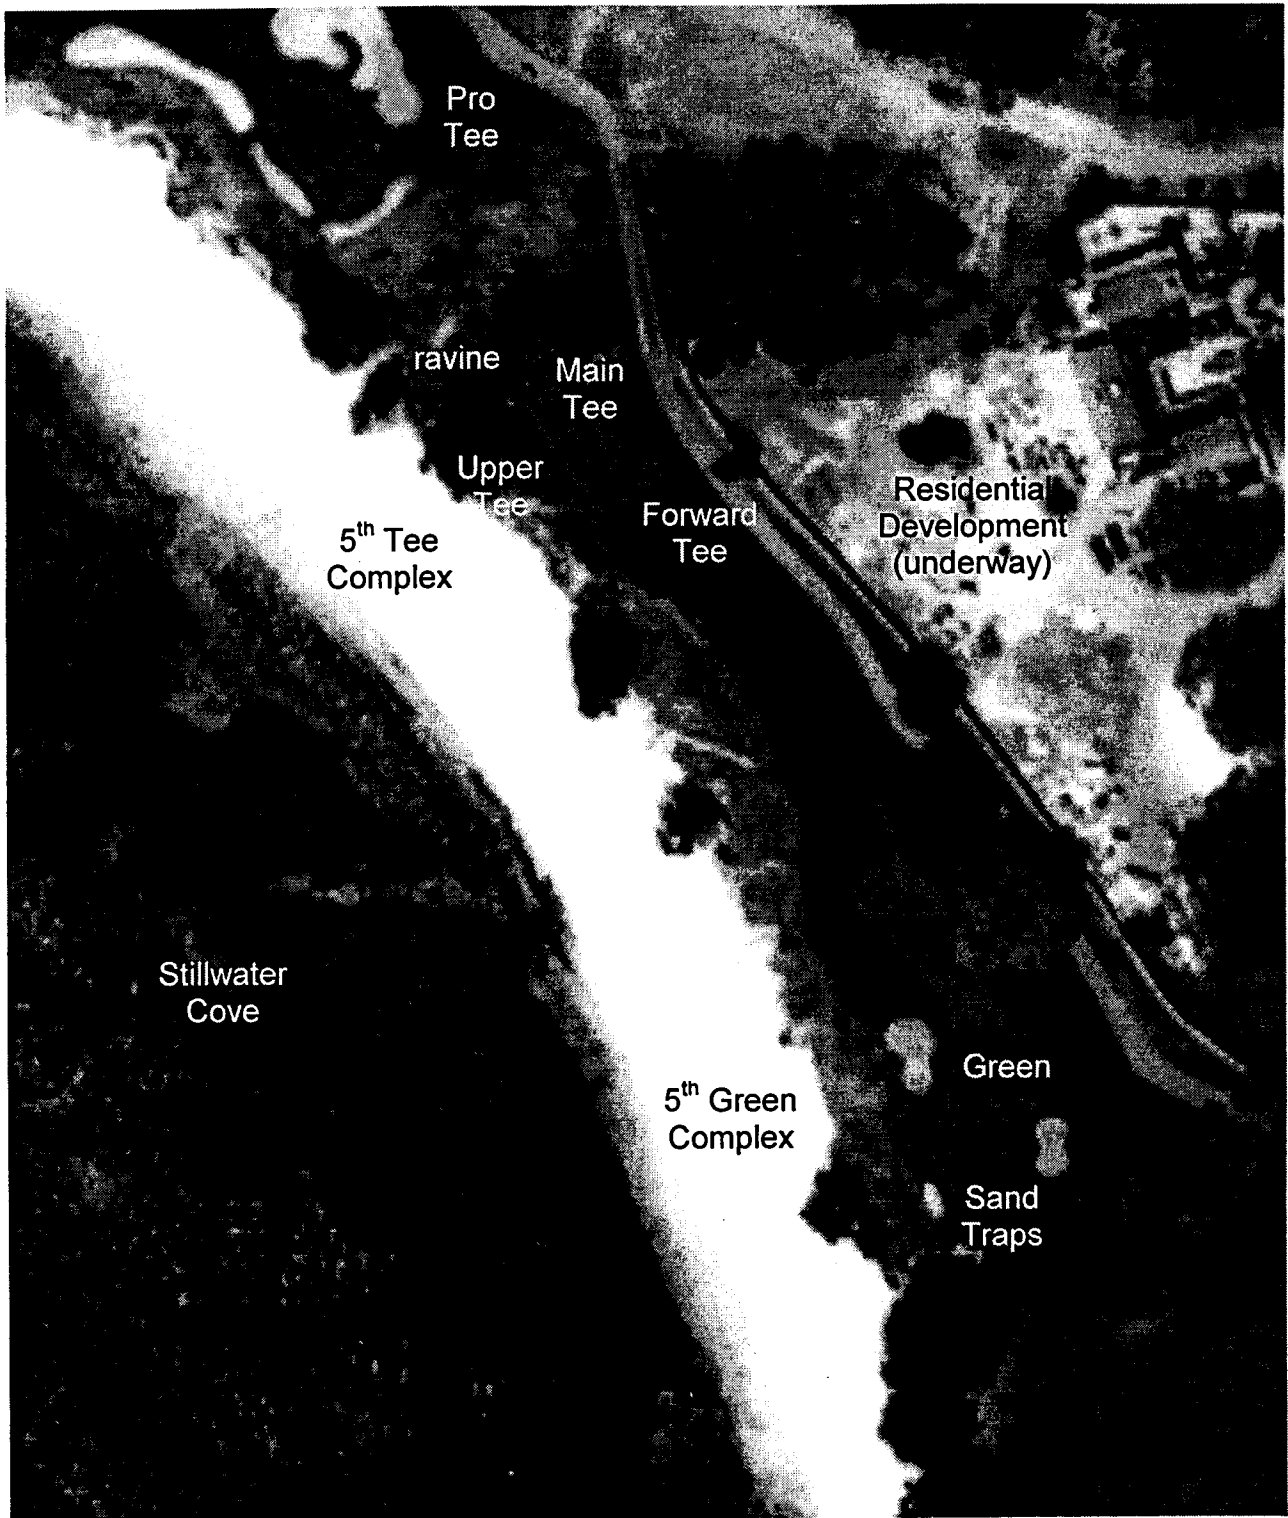


Exhibit E – pg 1 of 2
2001 Aerial Photo of Pebble Beach Golf Links 5th Hole
(Residences on east side of golf cart path under construction.)

3-04-030
Pebble Beach Golf Links 5th Hole Seawalls



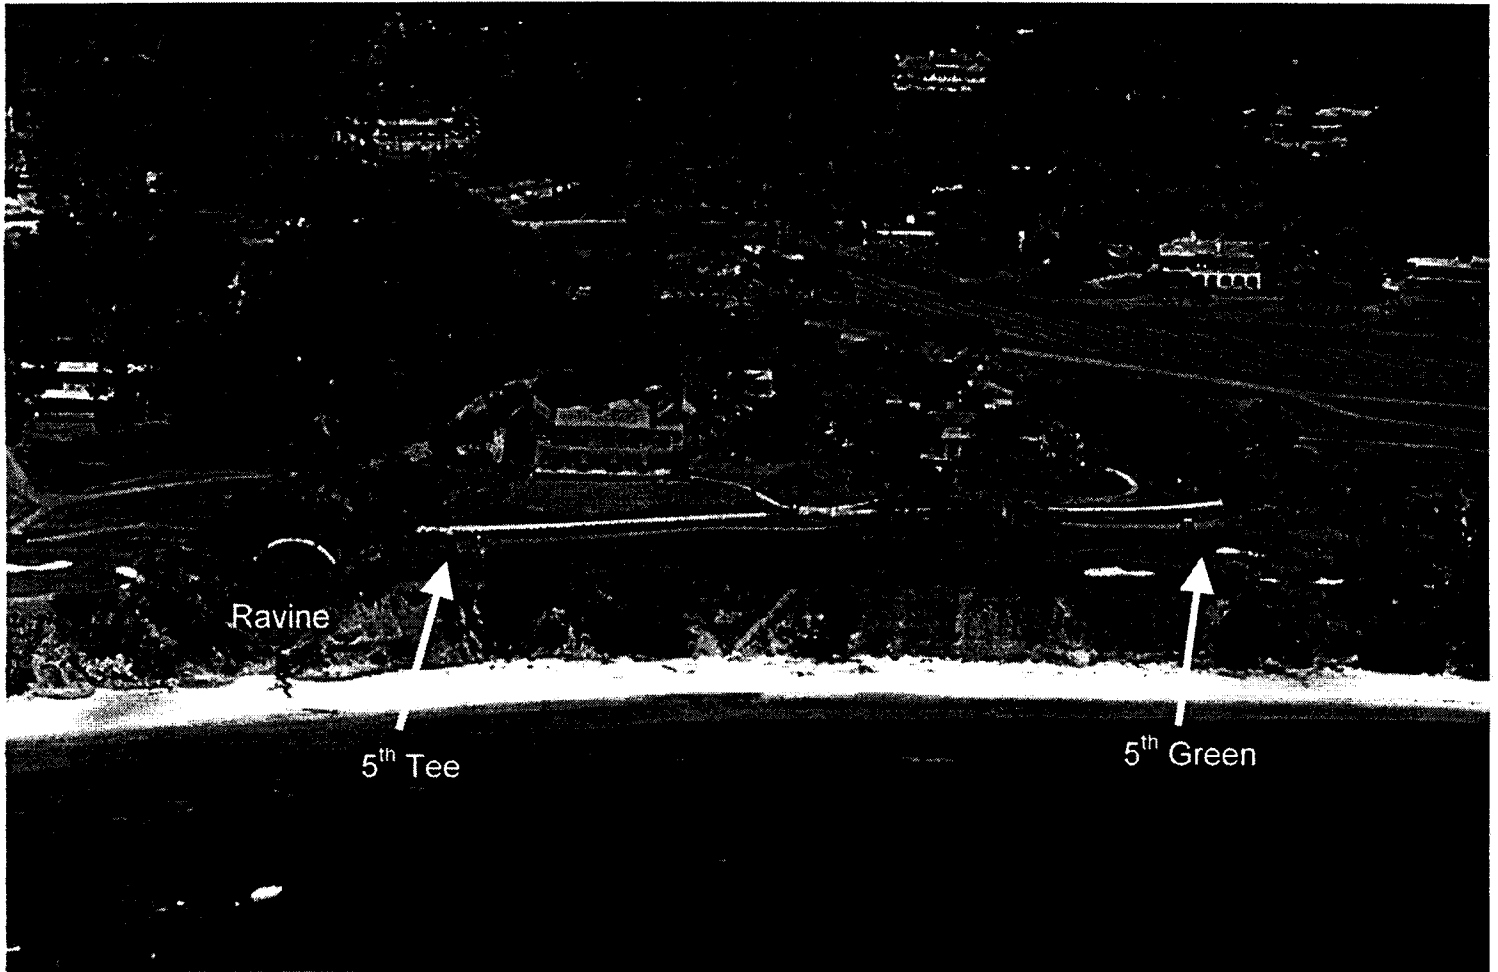


Exhibit E – pg 2 of 2
Oblique Aerial Photo of Pebble Beach Golf Links 5th Hole
(Shows 5th tee and 5th green; Stillwater Beach and bluffs in foreground;
residential development in background..)

3-04-030

Pebble Beach Golf Links 5th Hole Seawalls



California Coastal Commission

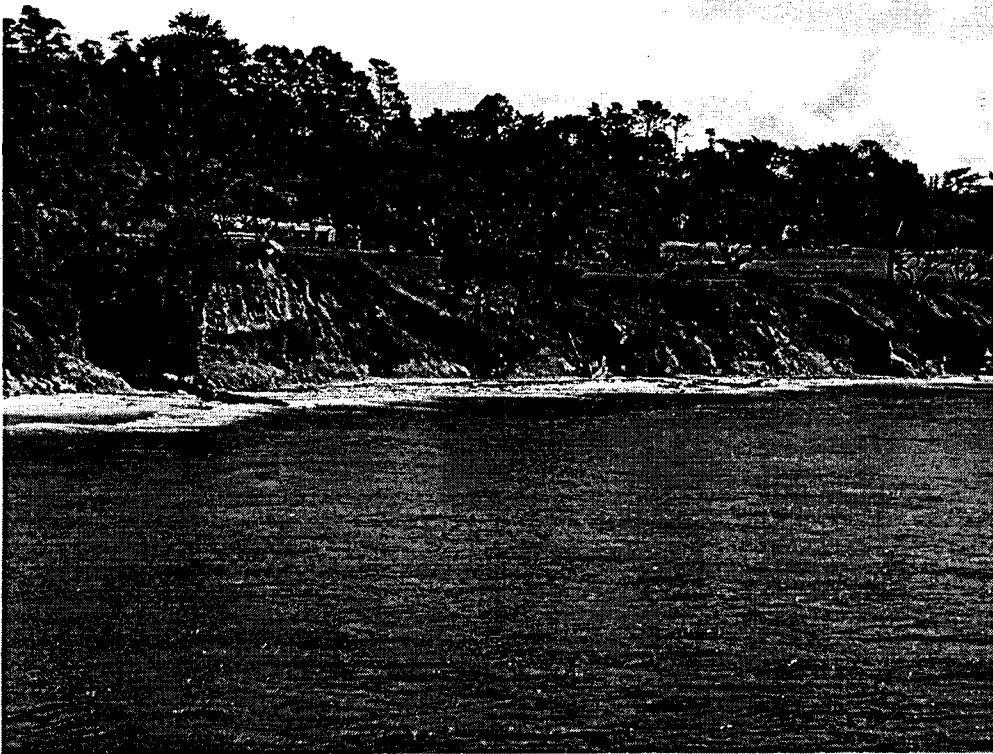


Photo 1.
Staff photo of 5th
Tee and fairway -
ravine, main tee
and upper tee on
left of photo.



Photo 2.
Staff photo bluff
below 5th tee.

Exhibit F – pg 1 of 4
Staff photos of 5th Tee and 5th Green (dated October 27, 2004)

3-04-030
Pebble Beach Golf Links 5th Hole Seawalls





Photo 3.
Staff photo of 5th
Tee – showing tee
box retaining wall
along ravine and
edge of bluff at
undercut tree near
upper tee.



Photo 4.
Staff photo of bluff
below 5th hole -
showing undercut
area near 5th tee.

Exhibit F – pg 2 of 4
Staff photos of 5th Tee and 5th Green (dated October 27, 2004)

3-04-030

Pebble Beach Golf Links 5th Hole Seawalls



California Coastal Commission



Photo 5.
Staff photo of
landslide scarp
and erosional gully
near 5th green –
bunker to left.



Photo 6.
Staff photo of
proximity of
sandtrap and 5th
green 5th to top of
landslide scarp

Exhibit F – pg 3 of 4
Staff photos of 5th Tee and 5th Green (dated October 27, 2004)





Photo 7.
Staff photo looking
north from 5th
green showing
proximity of hole
to top of bluff.

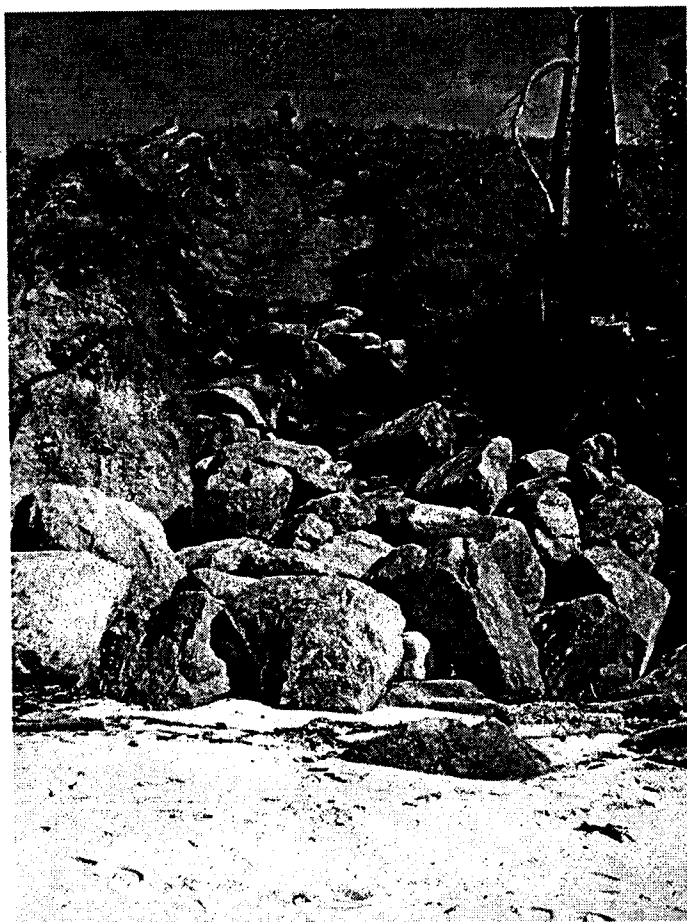


Photo 8.
Staff photo of
emergency
rebetment and
shotcrete in
erosional gully
formed by
landslide below
5th green.

Exhibit F – pg 4 of 4
Staff photos of 5th Tee and 5th Green (dated October 27, 2004)

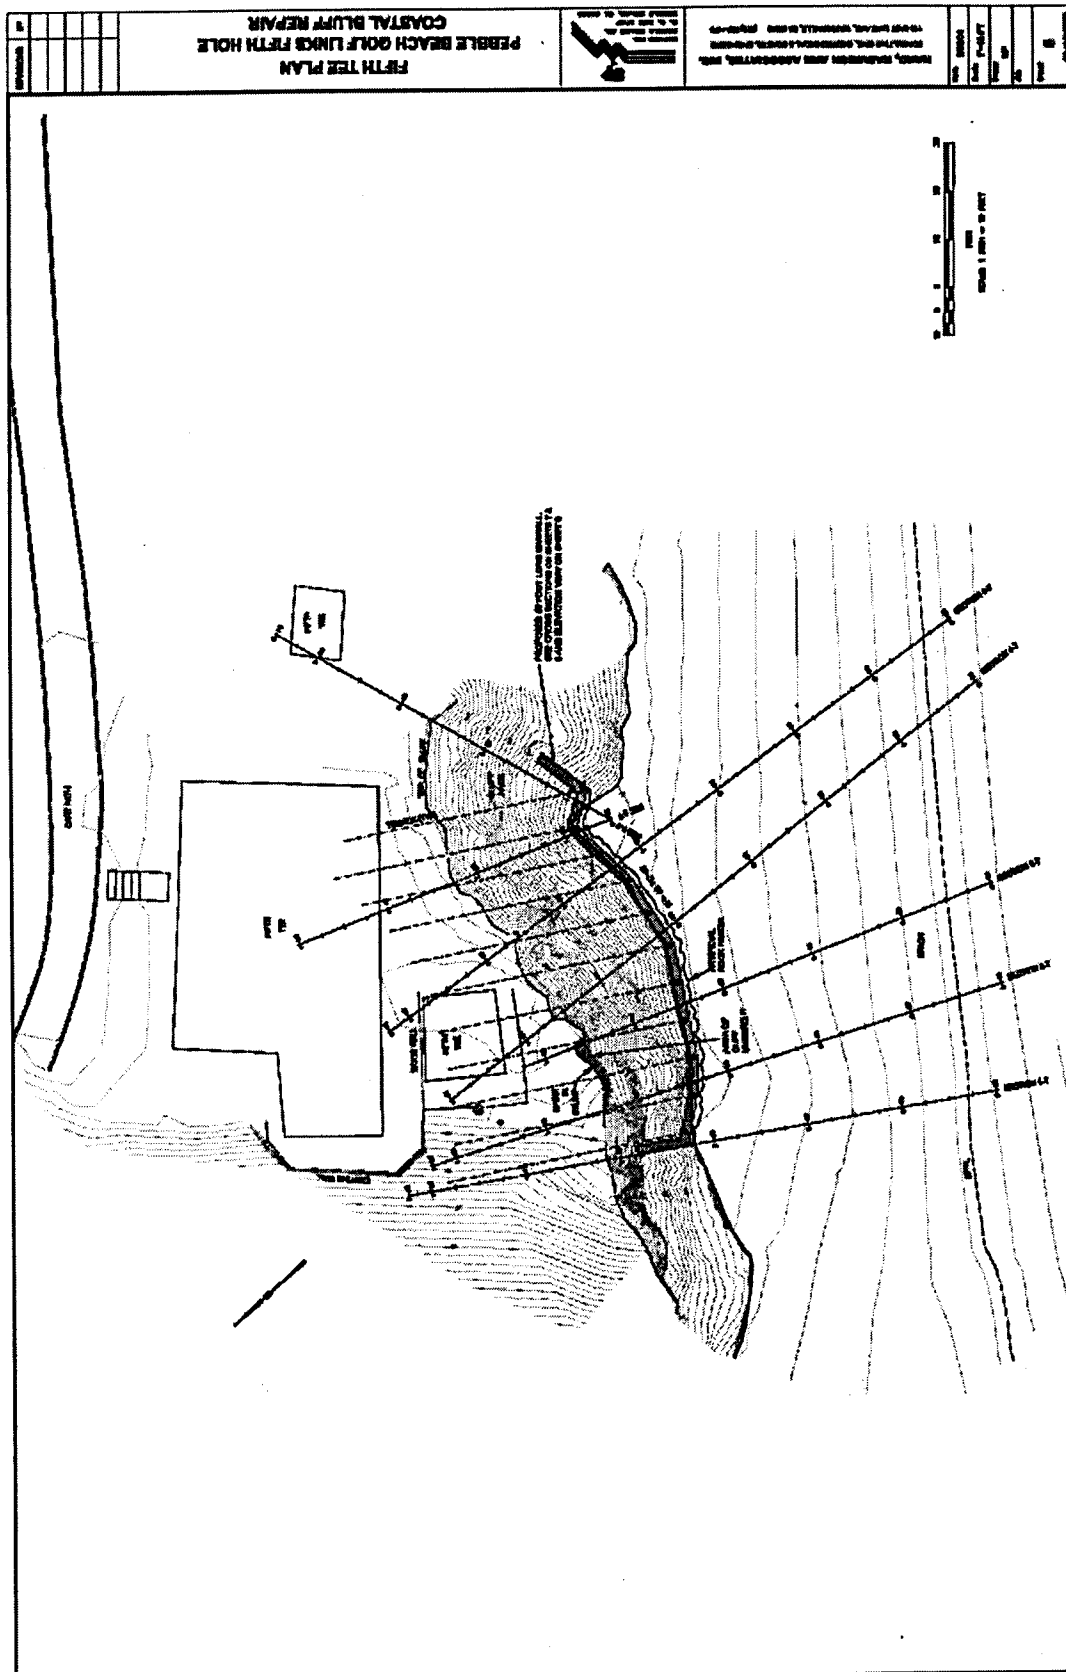
3-04-030 (Pebble Beach Golf Links 5th Hole Seawalls) Exhibits

Exhibit G – pg 1 of 4
 Proposed Site Plans and Elevations

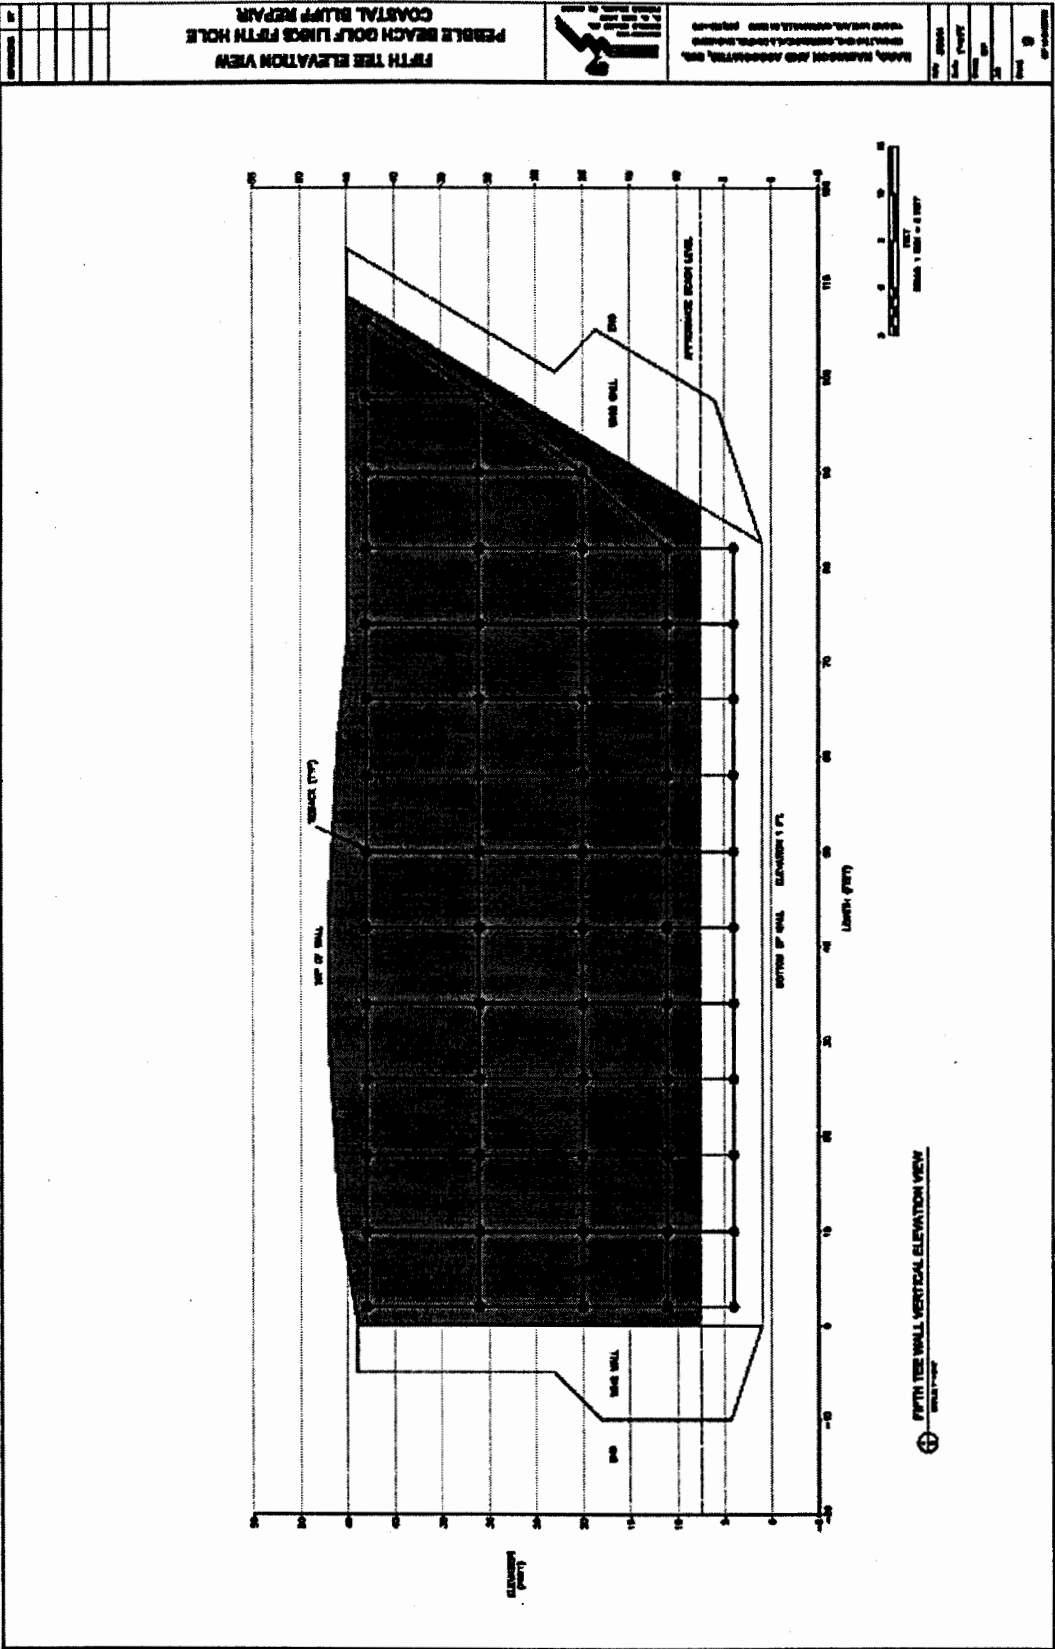


Exhibit G – pg 2 of 4
Proposed Site Plans and Elevations

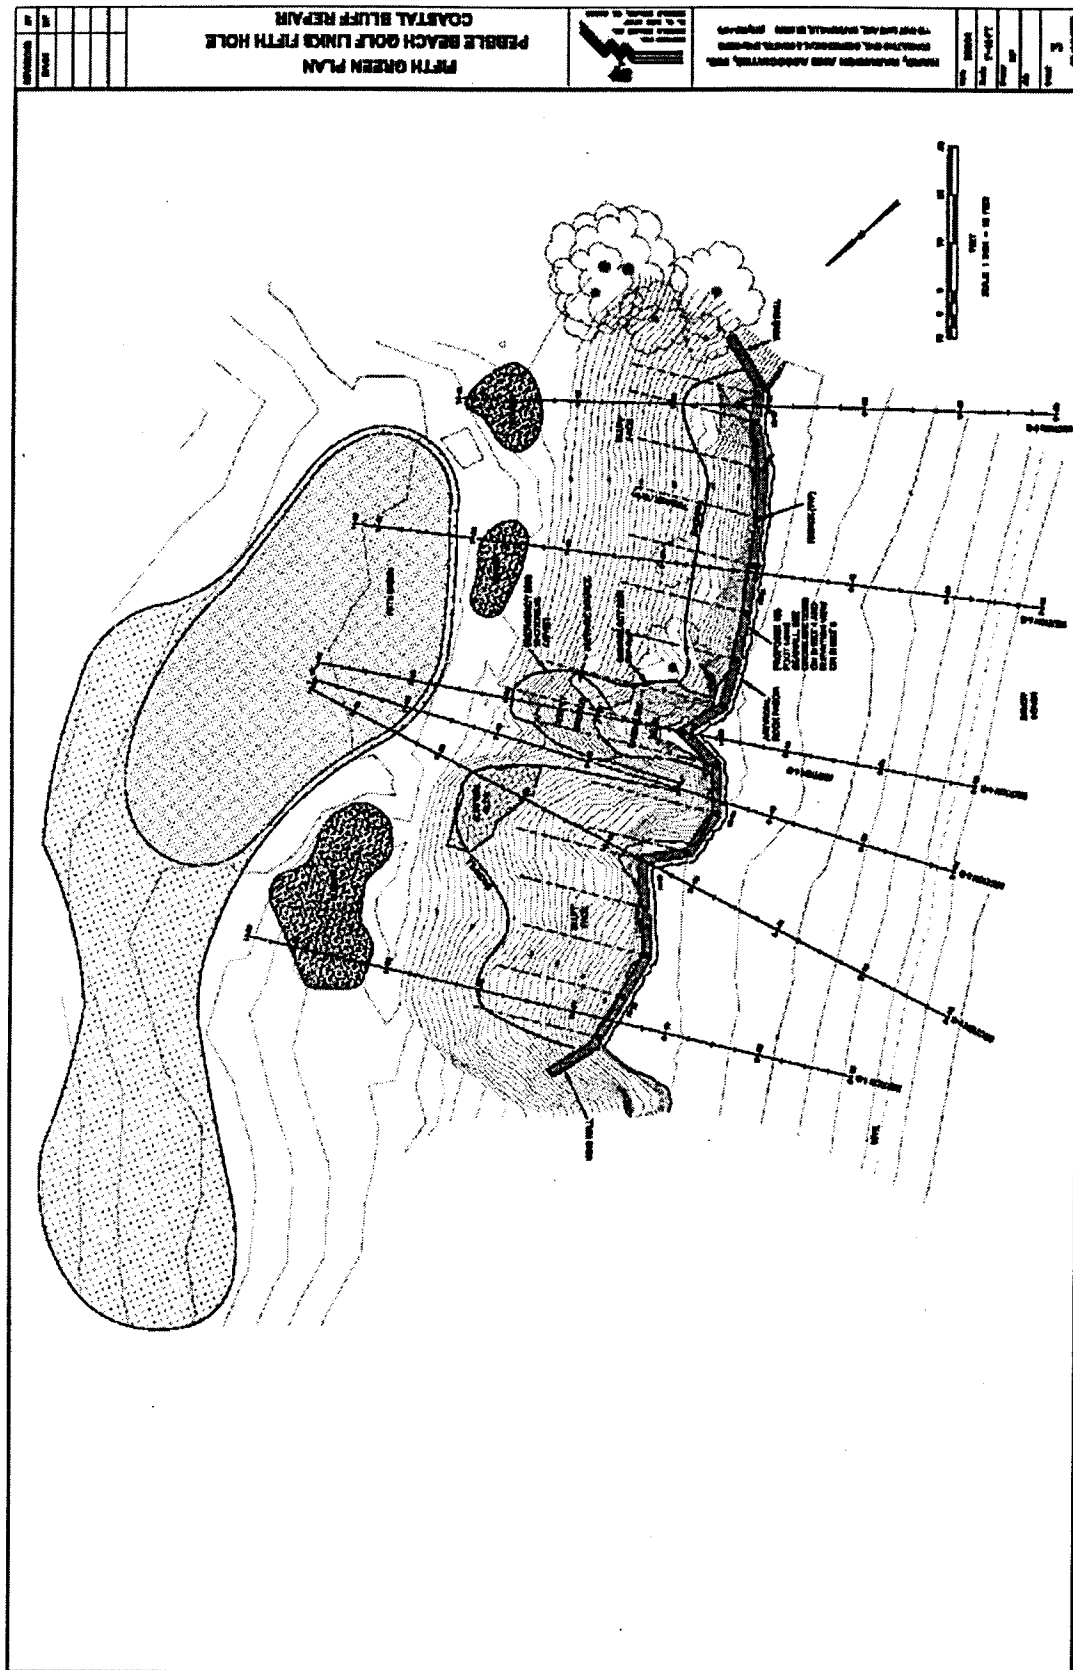


Exhibit G – pg 3 of 4
 Proposed Site Plans and Elevations

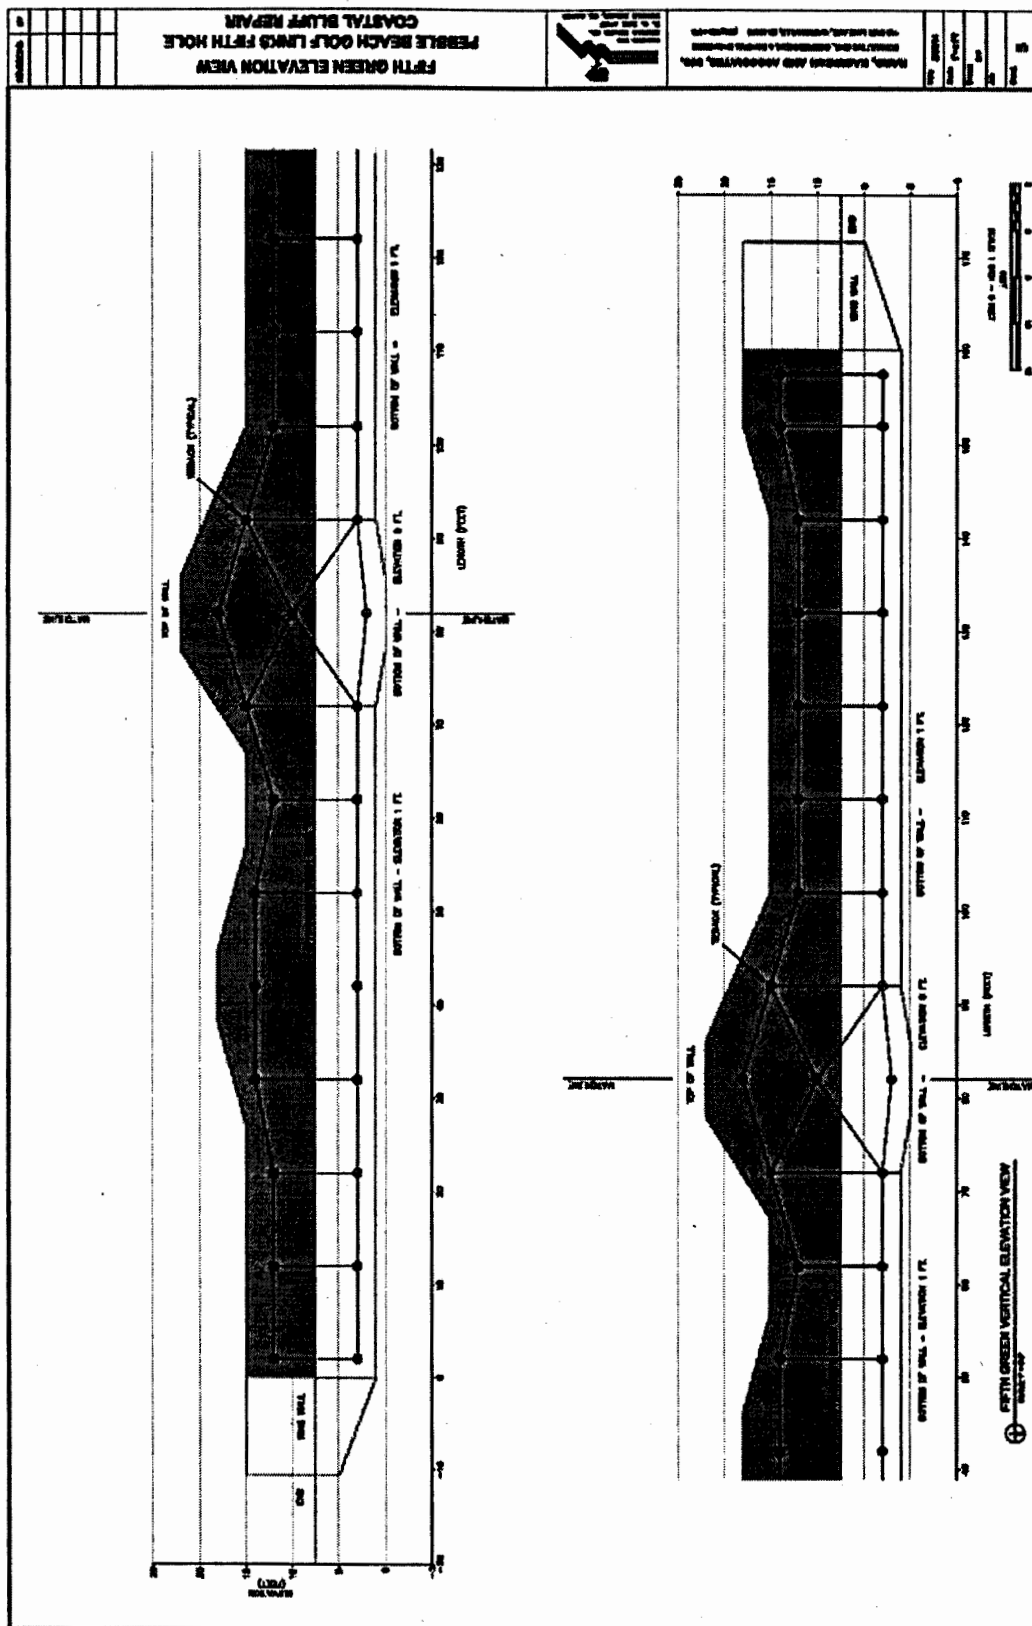


Exhibit G – pg 4 of 4
Proposed Site Plans and Elevations

***Existing / Proposed View as seen
from Beach looking Northwest (Fifth Tee)***



Exhibit H - pg 1 of 2
Visual Simulation of Coastal Bluff - Before and After Proposed Seawalls -
5th Tee



***Existing / Proposed View as seen
from Beach looking North (Fifth Green)***

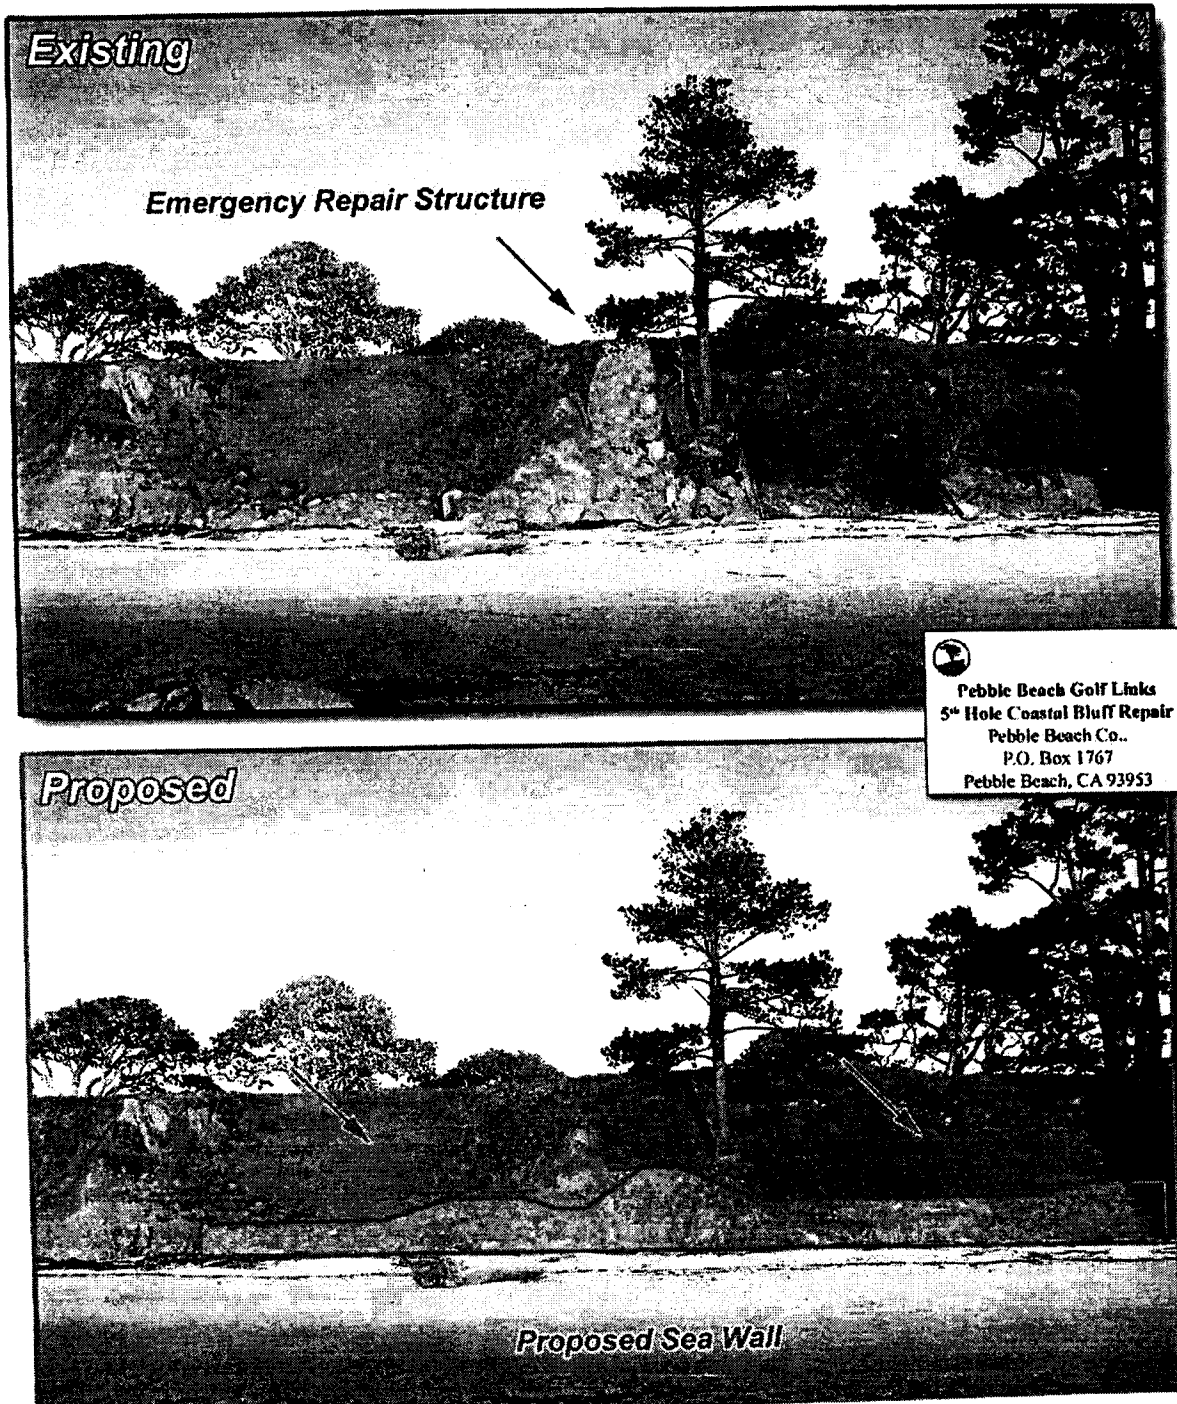


Exhibit H - pg 2 of 2
Visual Simulation of Coastal Bluff - Before and After Proposed Seawalls –
5th Green

Section 30235 states that seawall shall be permitted "when designed to eliminate or mitigate adverse impacts on local shoreline sand supply." Clearly, these seawalls cannot be designed to eliminate or mitigate adverse impacts, and therefore must be denied. However, there have been cases where offsite mitigation is appropriate. Because the seawalls will destroy at least 1.1 acres of valuable beach and Coastal Access, the PBGL should identify and purchase similar land elsewhere along the 17 Mile Drive to conserve for public use.

If there is not another pocket beach available for purchase in or adjacent to 17 Mile Drive, the Commission should consider requiring the purchase of similar land in Monterey County that has a similar draw for the public. If such a pocket beach cannot be located and purchased, we would like to see an in-lieu mitigation fee to replace such land. We would assume that purchase price of a comparable 1.1 acre ocean front lot located along 17 Mile Drive, may run in the excess of five million dollars.

Sincerely,



Kaya Pederson *EW*
Surfrider Foundation, Monterey County Chapter
PO Box 51575
Pacific Grove, CA 93950



The putting green consists of the green, the hole, the bunkers (sand traps) and drainage and drainage improvements (e.g., trench drains, lateral hydroaugers, vertical sheet drains, drop inlets and drain piping). In other words, the Staff makes the argument that a hole, a lawn, a couple of large holes filled with sand and some drainage improvements create a structure. We do not agree with this assertion. Under the staff's analysis, everyone with an ocean front lawn would then be entitled to a seawall.

B. The fifth hole is NEW and not unique, and clearly violated Coastal Act section 30253.

According to the Staff Report, the fifth hole was not part of the Golf Course until very recently. As late as 1998, the land where the fifth hole is now located, was not owned by the Pebble Beach Golf Course. In other words, the Fifth Hole was located somewhere else!

According to the Staff Report, the "new" fifth hole was built in conformance with an LCP, which although not specified in the staff report, undoubtedly states that new development shall assure geologic stability and not in any way require the construction of protective devices that alter the natural bluff and cliffs. (See Coastal Act section 30253(2)). Usually, Local Coastal Programs require setbacks based on estimated erosion rates over a period of 75-100 years. However, it is clear here that the setback was only sufficient for 7 years. In other words, the project clearly violated the requirements to assure geologic stability.

The only reason that this project is requesting a seawall is that the designers chose to place the tees and the green too close to the edge of the bluff. The tee and the green can be easily moved to another location. It is just a lawn...and changing the green and the tee would simply make the fifth hole unique in another manner. Surely, Jack Nicklaus could design a challenging and unique hole that is set farther away from the bluff.

C. The Coastal Commission must deny the project because it is not the least environmentally damaging alternative.

The Staff states that the project is the least environmentally damaging preferred alternative, because there are no other non-structural feasible alternatives. The Staff Report claims that the no project alternative would eliminate the fifth hole (destroying the 18 hole golf course with the elimination of the hole) and that it cannot be relocated. This assertion does not make sense.

Where was the fifth hole previously located? Or was the Pebble Beach Golf Course, since 1919 suffering from the lack of a fifth hole? Clearly, the fifth hole could be moved back to its original location. Or the cart paths could be reconfigured. The Oak Trees that the PBGL claims are historical could be moved with less environmental damage than pouring 243 linear feet of concrete on the beach. We do not agree with the contention that the cart path cannot be moved to make more space for the fifth hole and tees.

Golf courses can be changed and reconfigured, as demonstrated by the inadvisable relocation of the fifth hole directly into harms way. The Pebble Beach Golf Course assumed the risk of erosion, placing the tees and green adjacent to an ocean that has consistently created huge waves. The golf course, with green fees of \$400, cannot be considered a low cost visitor serving facility. It can hardly be considered public.

Finally, as demonstrated by the staff report, the seawall will result in the loss of the beach at Stillwater Cove. Not only are beaches rare in this area of the coast, the previously approved shoreline armoring projects have had significant adverse impacts to the sand supply, thereby further reducing the availability of beaches for the public. (Staff Report, page 46). Access to Stillwater Cove was part of the mitigation for the Spanish Bay Resort. Thus, the project proposed by PBGL will destroy the mitigation of another project.

D. The Commission, if it approves the seawalls, must mitigate the adverse impacts.

According to the staff report, there is no feasible way to mitigate the adverse impacts of the beach. Instead, the mitigation consists taking a survey of the beach on two days of the year to analyze the adverse impacts of the seawalls at Stillwater cove.





Surfrider Foundation®

RECEIVED

MAR 21 2005

CALIFORNIA
COASTAL COMMISSION
CENTRAL COAST AREA

March 15, 2005

California Coastal Commission
Central Coast District Office
Charles Lester, Deputy Director
Diane Landry, District Manager
725 Front Street, Suite 300
Santa Cruz, CA 95060-4508
(831) 427-4863
FAX (831) 427-4877

Staff Note – this correspondence was received following mailing for project originally scheduled for March 2005 hearing as Item F11c. Project was then postponed to April 2005 hearing as Item F7a.

Fri- 3/18/05
Item 11 C.
Oppose

Re: Application No. 3-04-30 (Pebble Beach Co., Monterey Co.)

Honorable Coastal Commission,

The Surfrider Foundation is a non-profit environmental organization dedicated to the protection and enjoyment of the world's oceans, waves and beaches for all people, through conservation, activism, research and education. We have over 60 chapters nationwide and 40,000 members.

The Surfrider Foundation strongly objects to the application of the Pebble Beach Company for two seawalls to protect golf "habitat" and the Staff Report Findings that recommend approval of such projects. We do not agree that a recently created fifth hole should be considered an existing structure within Coastal Act section 30235. We believe the proposed project violates a number of sections of the Coastal Act, including sections 30233, 30235, 30253, 30213, 30001.5.

A. The Application violates Pub. Res. Code section 30235 because golf tees and golfing greens are not "existing structures".

The Staff Report makes the finding that the fifth hole golf tee and the fifth hole putting green are existing structures within the meaning of section 30235 of the Coastal Act. (Staff Report Coastal Act section 30235 states:

Revetments, breakwaters, groins, harbor channels, seawalls, cliff retaining walls, and other such construction that alters natural shoreline processes shall be permitted when required to serve coastal-dependent uses or to protect existing structures or public beaches in danger from erosion and when designed to eliminate or mitigate adverse impacts on local shoreline sand supply.

The Staff notes that the Tee Complex consists of a number of "Tee's" such as the pro-tee box, the main tee, the upper tee, and the forward tee. These boxes were created using four retaining walls each. It appears that only the "upper tee" and the "forward tee" are threatened by erosion.

The Coastal Commission has interpreted Coastal Act section 30235 as protecting solely existing principal structures in danger from erosion, or to protect coastal-dependent uses or public beaches from erosion. Concisely, an exception should serve the public interest. Thus, decks, swimming pools, sheds, and gazebos are not considered structures within the meaning of Section 30235. In this case, the Staff attempts to make the case that a stretch of lawn, supported by four retaining walls, which makes up the "tee" is a "structure" within the meaning of section 30235. The tees are simply artificially created flat lawn areas that can be easily moved back from the edge of the bluff.

NATIONAL OFFICE • P.O. BOX 6010 • SAN CLEMENTE, CA 92674-6010 • (949) 492-8170 • FAX (949) 492-8142
www.surfrider.org • E-MAIL info@surfrider.org

Exhibit P – pg 1 of 3
Correspondence



California Coastal Commission

3-04-030
Pebble Beach Golf Links 5th Hole Seawalls



Photo 1.
Staff photo of
protective fencing
along public
accessway through.
Ocean Colony Golf
course in Half Moon
Bay. (Note grade
break on the left side
of photo; in time,
planted vegetation
will screen fencing.)



Photo 2.
Staff photo of
protective fencing
along public
accessway through.
Ocean Colony Golf
course in Half
Moon Bay. (Note,
direction of play is
from left to right.)

Exhibit O

Staff photos of public access way and protective fencing at
Ocean Colony golf Course in Half Moon Bay

3-04-030

Pebble Beach Golf Links 5th Hole Seawalls



California Coastal Commission

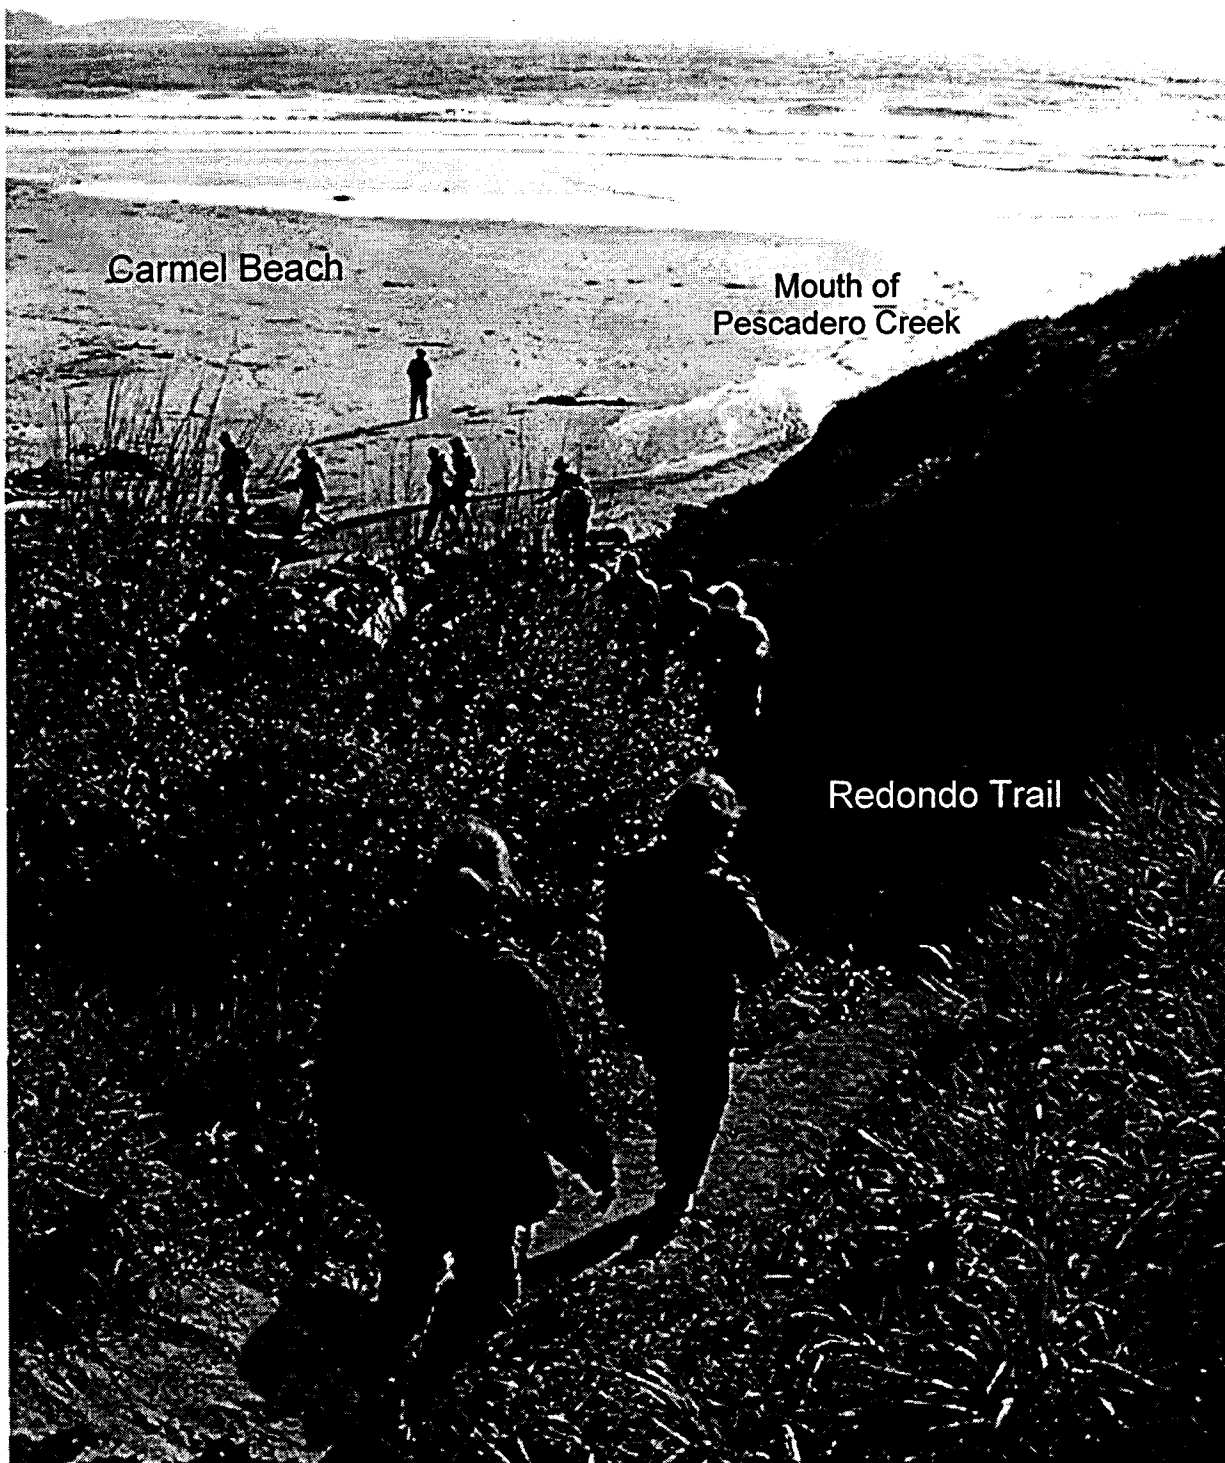


Exhibit N

Staff photo of public recreational use of Redondo Trail to Carmel Beach



California Coastal Commission

3-04-030

Pebble Beach Golf Links 5th Hole Seawalls

**Exhibit M2**

Aerial Photo showing Approximate Location of Carmel Beach Accessway
 (Plan View)

3-04-030

Pebble Beach Golf Links 5th Hole Seawalls

California Coastal Commission

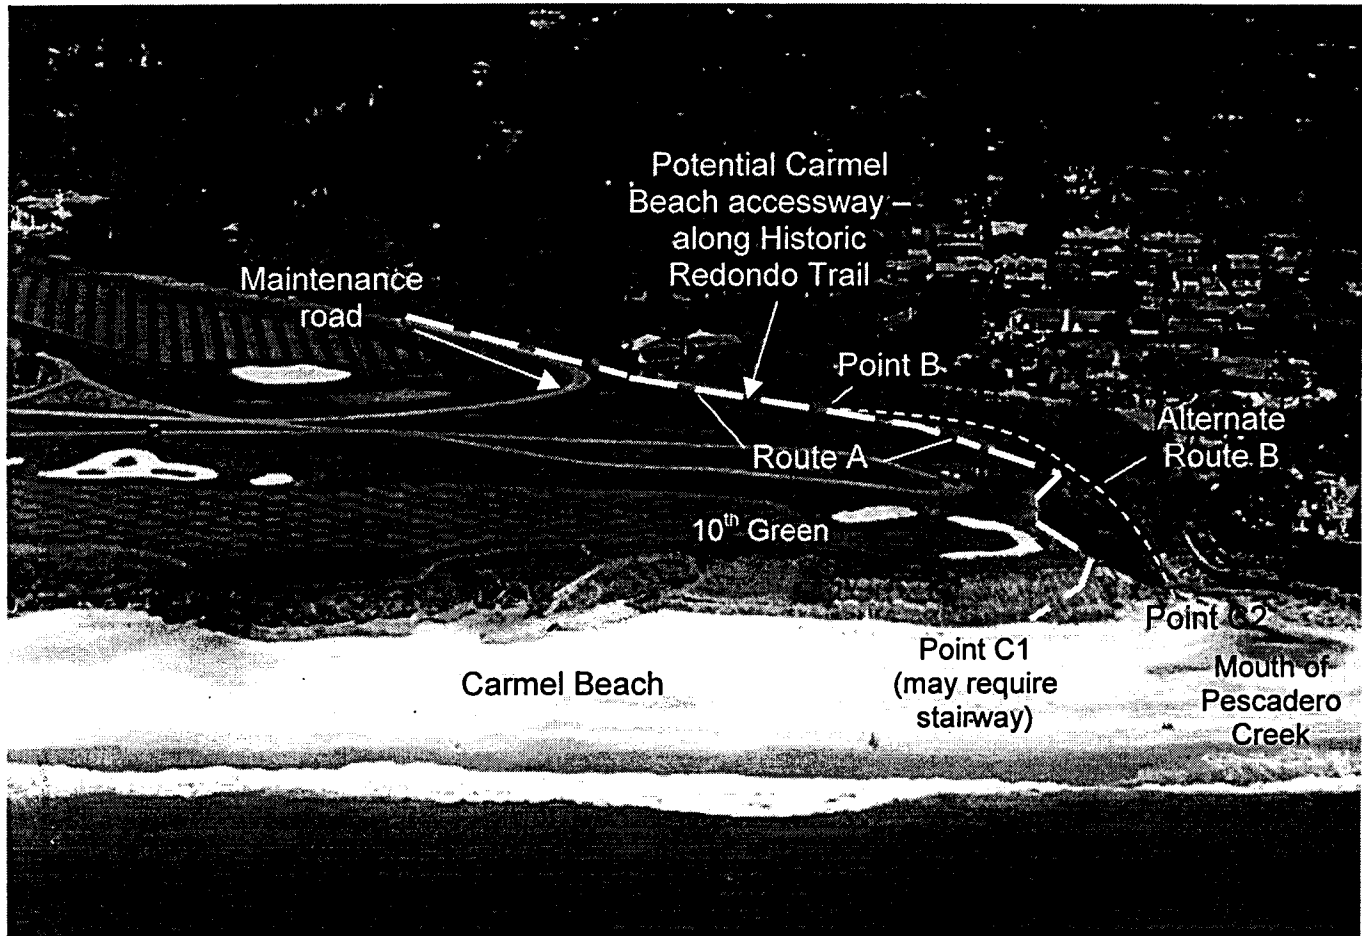
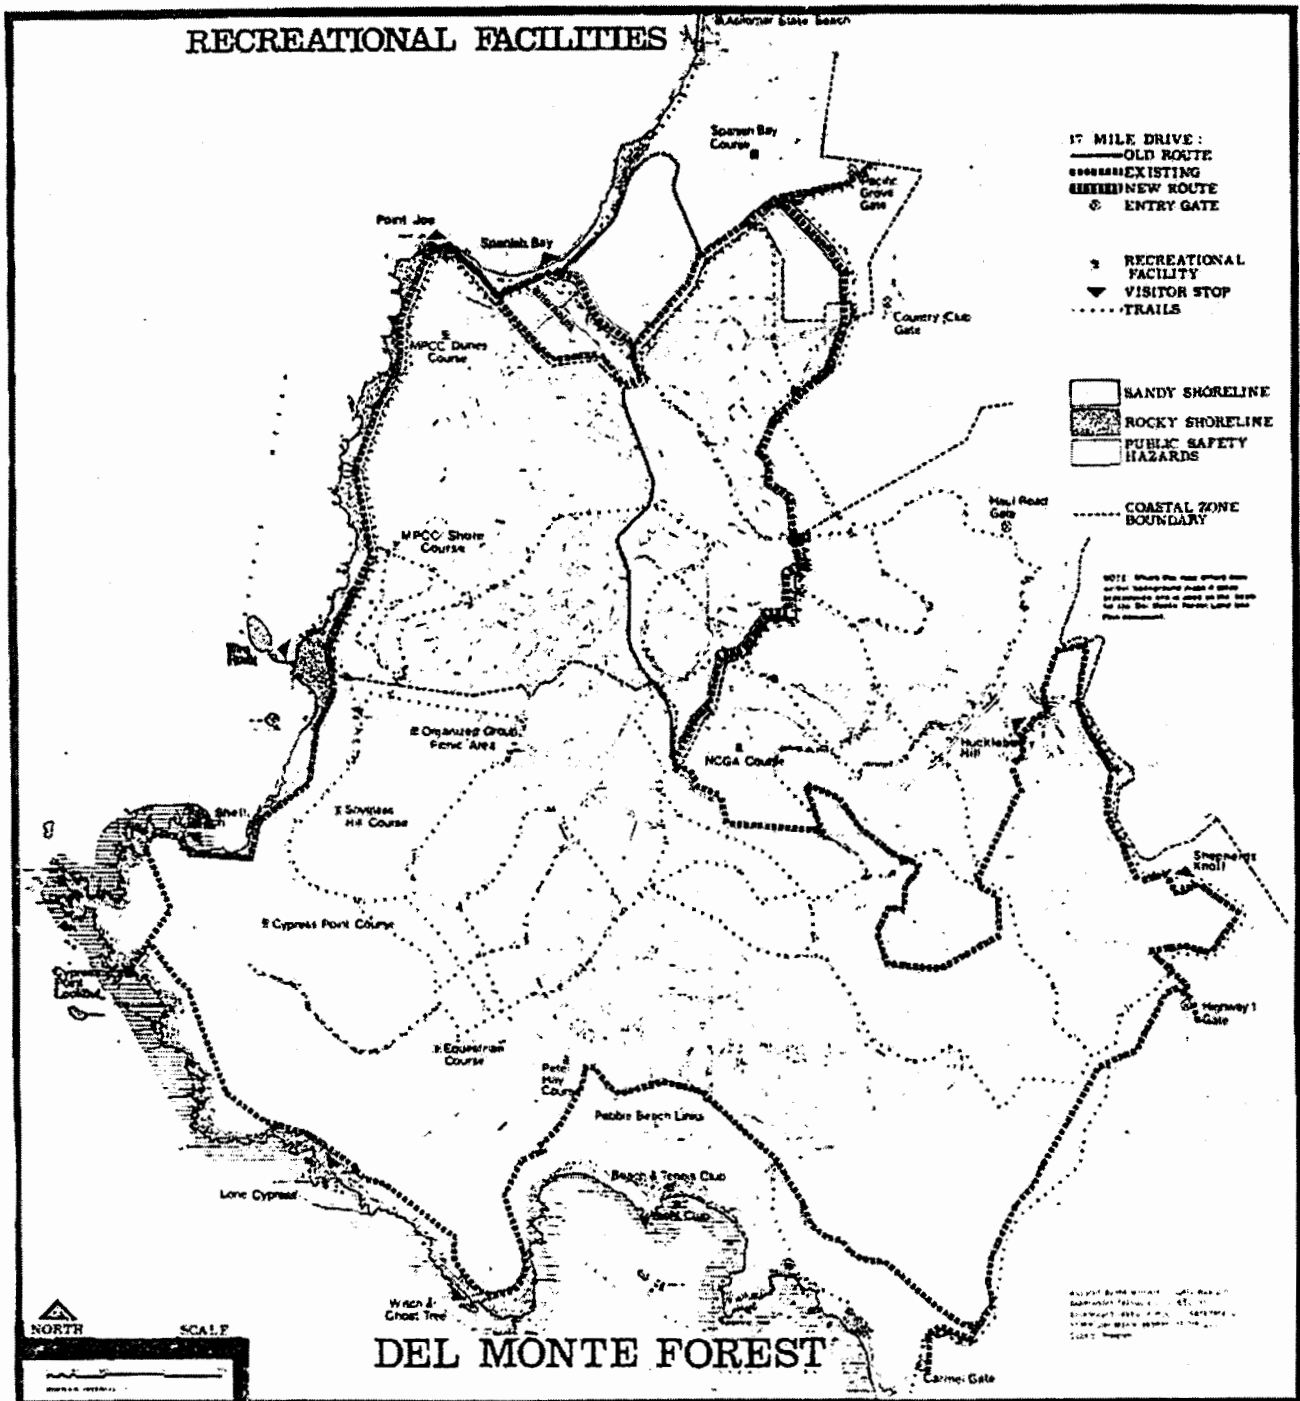


Exhibit M1

2004 Oblique Aerial Photo of Pebble Beach Golf Links at 10th Green,
- showing recommended alignment for Carmel Beach Accessway
along historic Redondo Trail.



FIGURE 15

RECREATIONAL FACILITIES**Exhibit L**

Del Monte Forest LUP Map of Recreational Facilities –
 showing recreational trail system..



California Coastal Commission

3-04-030

Pebble Beach Golf Links 5th Hole Seawalls

FIGURE 16

SHORELINE ACCESS

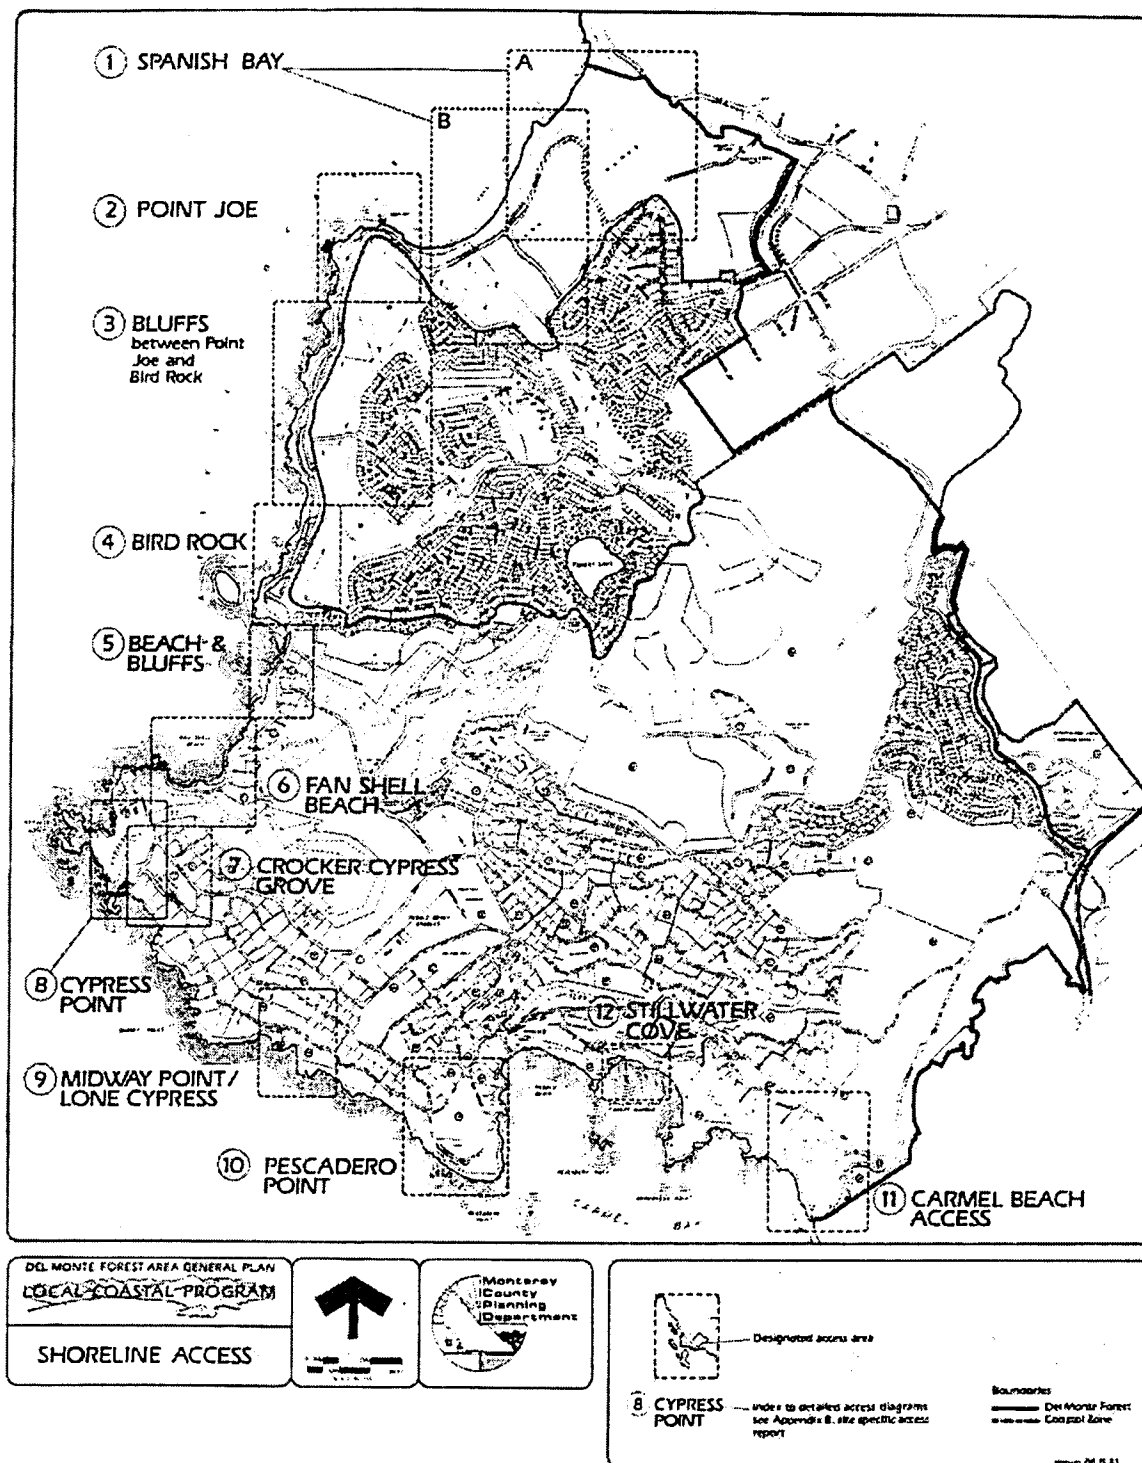


Exhibit K
Del Monte Forest LUP Map of Shoreline Access Areas

3-04-030
Pebble Beach Golf Links 5th Hole Seawalls

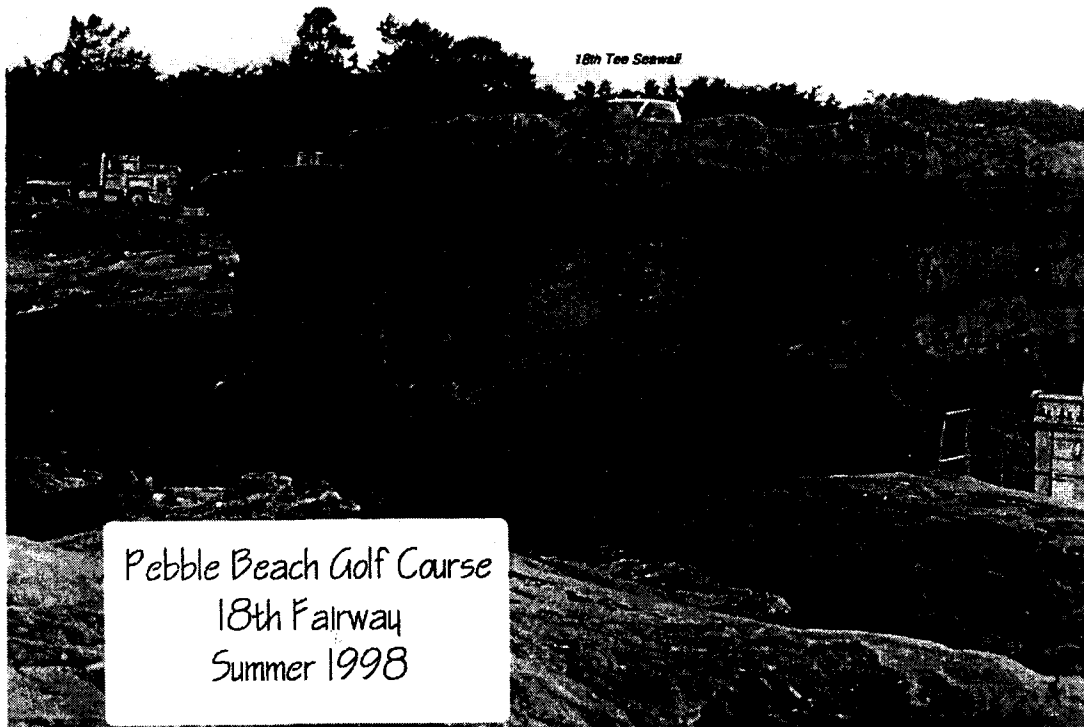


photo courtesy of Cemrock Naturalistic Environments

Photo 5.
Applicant's photo
of seawall at 18th
Tee. - dated
Summer, 1998.



Photo 6.
Applicant's photo
of seawall at 18th
Tee - dated
6/24/04.

Exhibit J – pg 3 of 3
Examples of Other Shoreline Protection Structures within Project Vicinity.



California Coastal Commission

3-04-030
Pebble Beach Golf Links 5th Hole Seawalls



Pebble Beach Golf Course
18th Fairway
Summer 1998

Photo 3.
Applicant's photo
of seawall at 18th
fairway - dated
Summer, 1998.

photo courtesy of Cenrock Naturalistic Environments



Photo 4.
Applicant's photo
of seawalls along
18th green (in
foreground),
fairway, and tee
(on right side of
photo) - dated.
6/25/04.

Exhibit J – pg 2 of 3
Examples of Other Shoreline Protection Structures within Project Vicinity.



California Coastal Commission

3-04-030
Pebble Beach Golf Links 5th Hole Seawalls

3-04-030 (Pebble Beach Golf Links 5th Hole Seawalls) Exhibits



Photo 1.
Applicant's photo
of 9th Hole seawall
– dated Summer,
1998.



Photo 2.
Applicant's photo
of 9th Hole seawall
- dated 6/24/04.

Exhibit J – pg 1 of 3
Examples of Other Shoreline Protection Structures within Project Vicinity.



California Coastal Commission

3-04-030
Pebble Beach Golf Links 5th Hole Seawalls



Exhibit I2
2001 Aerial Photo of Site Showing Required Beach and Bluff Profiles -
Approximate Locations



Exhibit I
2001 Aerial Photo of Site Showing Proposed Construction Route