

CALIFORNIA COASTAL COMMISSION

SOUTH COAST AREA
245 W. BROADWAY, STE. 380
P.O. BOX 1450
LONG BEACH, CA 90802-4416
(310) 590-5071

Filed: 2/3/97
49th Day: 3/24/97
180th Day: 8/2/97
Staff: CP-LB
Staff Report: 2/11/97
Hearing Date: March 11-14, 1997
Commission Action:

STAFF REPORT: CONSENT CALENDAR

APPLICATION NO.: 5-97-018

APPLICANT: Robert Singer

AGENT: Donald Thuotte

PROJECT LOCATION: 229 Sherman Canal, Venice, City of Los Angeles, Los Angeles County.

PROJECT DESCRIPTION: Remodel and addition to an existing two-story 1,980 square foot single family residence resulting in a 30 foot high, 2,844 square foot single family residence with an attached two-car garage.

Lot Area	2,850 sq. ft.
Building Coverage	1,546 sq. ft.
Pavement Coverage	430 sq. ft.
Landscape Coverage	874 sq. ft.
Parking Spaces	3
Zoning	RW1
Plan Designation	Single Family Residential-Waterway
Ht abv fin grade	30 feet

SUMMARY OF STAFF RECOMMENDATION:

Staff recommends that the Commission grant a permit for the proposed development with conditions relating to pervious yard areas, water quality, parking, height, and drainage. The applicant agrees with the recommendation.

LOCAL APPROVAL RECEIVED:

1. City of Los Angeles Approval in Concept #96-004, 1/15/97.

STAFF RECOMMENDATION:

The staff recommends that the Commission adopt the following resolution:

I. Approval with Conditions

The Commission hereby grants, subject to the conditions below, a permit for the proposed development on the grounds that the development, as conditioned, will be in conformity with the provisions of Chapter 3 of the California Coastal Act of 1976, will not prejudice the ability of the local government having jurisdiction over the area to prepare a Local Coastal Program conforming to the provisions of Chapter 3 of the Coastal Act, is located between the sea and first public road nearest the shoreline and is in conformance with the public access and public recreation policies of Chapter 3 of the Coastal Act, and will not have any significant adverse impacts on the environment within the meaning of the California Environmental Quality Act.

II. Standard Conditions

1. Notice of Receipt and Acknowledgment. The permit is not valid and development shall not commence until a copy of the permit, signed by the permittee or authorized agent, acknowledging receipt of the permit and acceptance of the terms and conditions, is returned to the Commission office.
2. Expiration. If development has not commenced, the permit will expire two years from the date this permit is reported to the Commission. Development shall be pursued in a diligent manner and completed in a reasonable period of time. Application for extension of the permit must be made prior to the expiration date.
3. Compliance. All development must occur in strict compliance with the proposal as set forth in the application for permit, subject to any special conditions set forth below. Any deviation from the approved plans must be reviewed and approved by the staff and may require Commission approval.
4. Interpretation. Any questions of intent or interpretation of any condition will be resolved by the Executive Director or the Commission.
5. Inspections. The Commission staff shall be allowed to inspect the site and the project during its development, subject to 24-hour advance notice.
6. Assignment. The permit may be assigned to any qualified person, provided assignee files with the Commission an affidavit accepting all terms and conditions of the permit.

7. Terms and Conditions Run with the Land. These terms and conditions shall be perpetual, and it is the intention of the Commission and the permittee to bind all future owners and possessors of the subject property to the terms and conditions.

III. Special Conditions

1. Pervious Yard Area

In order to provide a setback for access, visual quality, and to protect the water quality and biological productivity of the canals, an uncovered and pervious yard area totaling no less than 450 square feet shall be maintained in the front yard area between the front of the structure and the front (canal) property line. No fill or building extensions shall be placed in or over the 450 square foot pervious front yard area with the exception of fences or permeable decks at grade. Fences in front yard areas shall not exceed 42 inches in height.

2. Deed Restriction

Prior to issuance of the Coastal Development Permit, the applicant shall submit a deed restriction for recording, subject to the review and approval of the Executive Director, and free of all prior liens and encumbrances which the Executive Director determines may affect the interest conveyed, which shall provide for the maintenance of not less than 450 square feet of uncovered and pervious yard area in the front yard adjacent to the canal property line in order to maintain an access corridor, preserve water quality, and protect the biological productivity of the canals. Uncovered means that no fill nor building extensions shall be placed in or over the pervious yard area with the exception of fences or permeable decks at grade. Fences in front yard area shall not exceed 42 inches in height. The deed restriction shall run with the land, binding on all heirs and assigns of the applicant.

3. Parking

Three parking spaces shall be provided and maintained on the site. Two parking spaces shall be maintained in the garage, and the third parking space shall be provided in the nine foot wide setback area situated between the garage and the alley (rear property line).

4. Height

The height of the structure shall not exceed thirty feet above the centerline of the canal walkway.

5. Drainage

The one hundred cubic foot french drain for on-site percolation shall be constructed and maintained as shown on the final approved plans.

IV. Findings and Declarations

The Commission hereby finds and declares:

A. Project Description and Area History

The applicant proposes to remodel and enlarge an existing two-story, 1,980 square foot single family residence located on the north bank of Sherman Canal in the Venice Canals neighborhood (Exhibit #2). The proposed additions will extend the first floor living room and family room, and the second floor master bedroom into the front yard area. The proposed project will maintain the required fifteen foot front yard setback (Exhibit #3). The two rear bedrooms will also be enlarged. The existing flat roof will be replaced by a pitched roof, however, a roof deck is proposed for a portion of the second floor roof. A thirty foot high, 124 square foot third story roof access structure is also proposed in order to provide access to the roof deck. No portion of the proposed project will exceed the thirty foot height limit (Exhibit #4). The existing attached two-car garage will be maintained. The proposed project will result in a 30 foot high, 2,844 square foot single family residence with an attached two-car garage.

The project site is a 2,850 square foot lot in the Venice Canals residential area. The neighborhood is comprised of both old and new one, two and three-story single family residences, and a few non-conforming duplexes.

The Commission has recognized in both prior permit and appeal decisions that the canals area of Venice is a coastal neighborhood of unique character. In 1975, the Commission developed a set of building standards for the Venice Canals area through hearing and voting on various permits. These standards reflect conditions imposed in a series of permits heard prior to that time. Since then, a set of special conditions, which are periodically updated, have been routinely applied to Coastal Development Permits in the Venice Canals area to address the Coastal Act issues of public access, habitat protection, preservation of community character, and scale of development. The conditions imposed on the Coastal Development Permits ensure that the projects are consistent with the Coastal Act. In order to mitigate the identified impacts, the appropriate special conditions have also been applied to this permit.

B. Habitat Protection

The Commission has found that Ballona Lagoon and the Venice Canals are sensitive habitat areas that must be protected from negative impacts associated with development.

Section 30240 of the Coastal Act states:

- (a) Environmentally sensitive habitat areas shall be protected against any significant disruption of habitat values, and only uses dependent on such resources shall be allowed within such areas.

- (b) Development in areas adjacent to environmentally sensitive habitat areas and parks and recreation areas shall be sited and designed to prevent impacts which would significantly degrade such areas, and shall be compatible with the continuance of such habitat areas.

The Venice Canals are located up stream from Ballona Lagoon, within the Ballona Wetlands system. The introduction of urban runoff, including pesticides, garden fertilizers, and runoff from impervious surfaces, can reduce the water quality of the canals which directly impacts the biological productivity of the system. The Ballona Wetlands system is habitat for many species of marine biota, including the state and federally listed endangered least tern.

In order to protect the biological productivity of the Venice Canals and Ballona Lagoon, the Commission has consistently conditioned projects along the waterways to provide front yard setbacks, pervious yard areas, and drainage devices to absorb and filter rainwater and site drainage before it enters the canals. The Commission's requirements are consistent with the recommendations of the Santa Monica Bay Restoration Project Action Plan to reduce non-point source pollutants.

The Commission has consistently conditioned projects in the Venice Canals to provide and maintain a large pervious front yard as a setback from the canal to enhance public access, to provide an area for percolation to protect the water quality and biological productivity of the canals, and to protect community character by maintaining a comparable scale between buildings in the area. No fill nor building extensions may be placed in or over the required pervious front yard area with the exception of fences or permeable decks at grade.

The Commission usually requires the provision of a 450 square foot pervious front yard area on thirty foot wide canal fronting lots. The figure of 450 square feet is based on an average setback of fifteen feet across a thirty foot wide lot. The Commission's front yard setback requirement is defined in square footage rather than an absolute lineal measurement to allow for changes in plane which can add architectural interest. A minimum ten foot front yard setback from the canal property line, with a required fifteen foot setback average, provides the required 450 square foot pervious front yard area and a front yard setback from the canal which is consistent with the other residences in the area.

In this case, the proposed project provides a fifteen foot front yard setback as required (Exhibit #3). No building encroachments are proposed to be constructed within fifteen feet of the canal property line. Therefore, the proposed project conforms to the Commission's front yard setback requirements.

The Commission has consistently required that applicants record the pervious yard area requirement on the property deeds to ensure continuous and ongoing protection of coastal resources and compliance with the requirement. Therefore, the Commission finds that prior to issuance of the permit, the applicant shall record a deed restriction which provides for the maintenance of not less than 450 square feet of pervious yard area in the front yard area adjacent the canal property line. Uncovered means that no fill nor building

extensions shall be placed in or over the pervious yard area with the exception of fences or permeable decks at grade. Fences in front yard area shall not exceed 42 inches in height. The deed restriction shall run with the land, binding on all heirs and assigns of the applicant.

In order to mitigate the impacts on the habitat caused by surface drainage and drainage from residential areas, the Commission has consistently required the provision of a one hundred cubic foot french drain in order to filter urban runoff before it enters the canals. A condition is routinely placed on permits for development in the canals area which requires that plans be submitted which depict the location and design of the required french drain. In this case, the applicant has submitted plans for the required french drain (Exhibit #3). The applicant is required to provide the french drain as shown on the final approved plans.

The Commission finds that, only as conditioned to provide a french drain and 450 square feet of pervious yard area to mitigate impacts on biological productivity caused by surface runoff into the canals, is the proposed project consistent with the Section 30240 of the Coastal Act.

C. Public Access/Parking

The Commission has consistently found that a direct relationship exists between residential density, the provision of adequate parking, and the availability of public access to the coast. Section 30252 requires that new development should maintain and enhance public access to the coast by providing adequate parking facilities.

Section 30252 of the Coastal Act states, in part:

The location and amount of new development should maintain and enhance public access to the coast by... (4) providing adequate parking facilities....

Many of the older developments in the Venice Canals area do not provide adequate on-site parking. As a result, there is a parking shortage in the area and public access has been negatively impacted. The small amount of parking area that may be available for the general public on the surrounding streets is being used by guests and residents of the area.

To mitigate this problem, the Commission has consistently conditioned new development within the canals to provide a rear setback of at least nine feet for guest parking or to make other provisions for guest parking. The required rear setback for guest parking is in addition to the Commission's other parking standards.

In this case, the proposed project meets the Commission's parking standards by providing two parking spaces in the attached two-car garage, and by providing a nine foot rear setback area for guest parking between the garage and the rear property line. Therefore, the proposed project conforms to the Commission's parking standards for the Venice Canals area which require two

parking spaces per residential unit and provisions for guest parking. The project provides an adequate parking supply for the proposed single family residence. The Commission finds that, only as conditioned to ensure adequate on-site parking, is the proposed project consistent with the public access policies of the Coastal Act.

D. Scale of Development

The Commission has also consistently conditioned projects in the Venice Canals area to protect the community character. The area is comprised of both old and new one, two and three-story single family residences and a few remaining duplexes. The majority of the structures in the area do not exceed thirty feet in height. In order to protect the existing scale and character of the neighborhood, and in order to protect the visual corridor along the canal's public walkways, the Commission has consistently limited new development in the canal area to a height of thirty feet, which is consistent with the general height of the area.

In this case, the proposed project has a maximum height of 30 feet (actually 29.625 inches). No portion of the proposed project exceeds thirty feet (Exhibit #4). Therefore, the proposed project conforms to the Commission's height requirements.

E. Local Coastal Program

Section 30604(a) of the Coastal Act provides that the Commission shall issue a Coastal Permit only if the project will not prejudice the ability of the local government having jurisdiction to prepare a Local Coastal Program which conforms with Chapter 3 policies of the Coastal Act:

- (a) Prior to certification of the Local Coastal Program, a Coastal Development Permit shall be issued if the issuing agency, or the commission on appeal, finds that the proposed development is in conformity with the provisions of Chapter 3 (commencing with Section 30200) of this division and that the permitted development will not prejudice the ability of the local government to prepare a Local Coastal Program that is in conformity with the provisions of Chapter 3 (commencing with Section 30200). A denial of a Coastal Development Permit on grounds it would prejudice the ability of the local government to prepare a Local Coastal Program that is in conformity with the provisions of Chapter 3 (commencing with Section 30200) shall be accompanied by a specific finding which sets forth the basis for such conclusion.


The Venice area of the City of Los Angeles does not have a certified Local Coastal Program. The proposed project, only as conditioned, is consistent with the habitat, coastal access, and recreation policies of the Coastal Act. Therefore, the Commission finds that approval of the proposed development, as conditioned, will not prejudice the City's ability to prepare a Local Coastal Program consistent with the policies of Chapter 3 of the Coastal Act, as required by Section 30604(a).

F. California Environmental Quality Act

Section 13096 of the California Code of Regulations requires Commission approval of Coastal Development Permit application to be supported by a finding showing the application, as conditioned by any conditions of approval, to be consistent with any applicable requirements of the California Environmental Quality Act (CEQA). Section 21080.5(d)(2)(1) of CEQA prohibits a proposed development from being approved if there are feasible alternatives or feasible mitigation measures available which would substantially lessen any significant adverse impact which the activity may have on the environment.

The proposed project, only as conditioned, is consistent with the habitat and coastal access policies of the Coastal Act. Therefore, the Commission finds that the proposed project, as conditioned to mitigate the identified impacts, is the least environmentally damaging feasible alternative and can be found consistent with the requirements of the Coastal Act to conform to CEQA.

8464F:CP

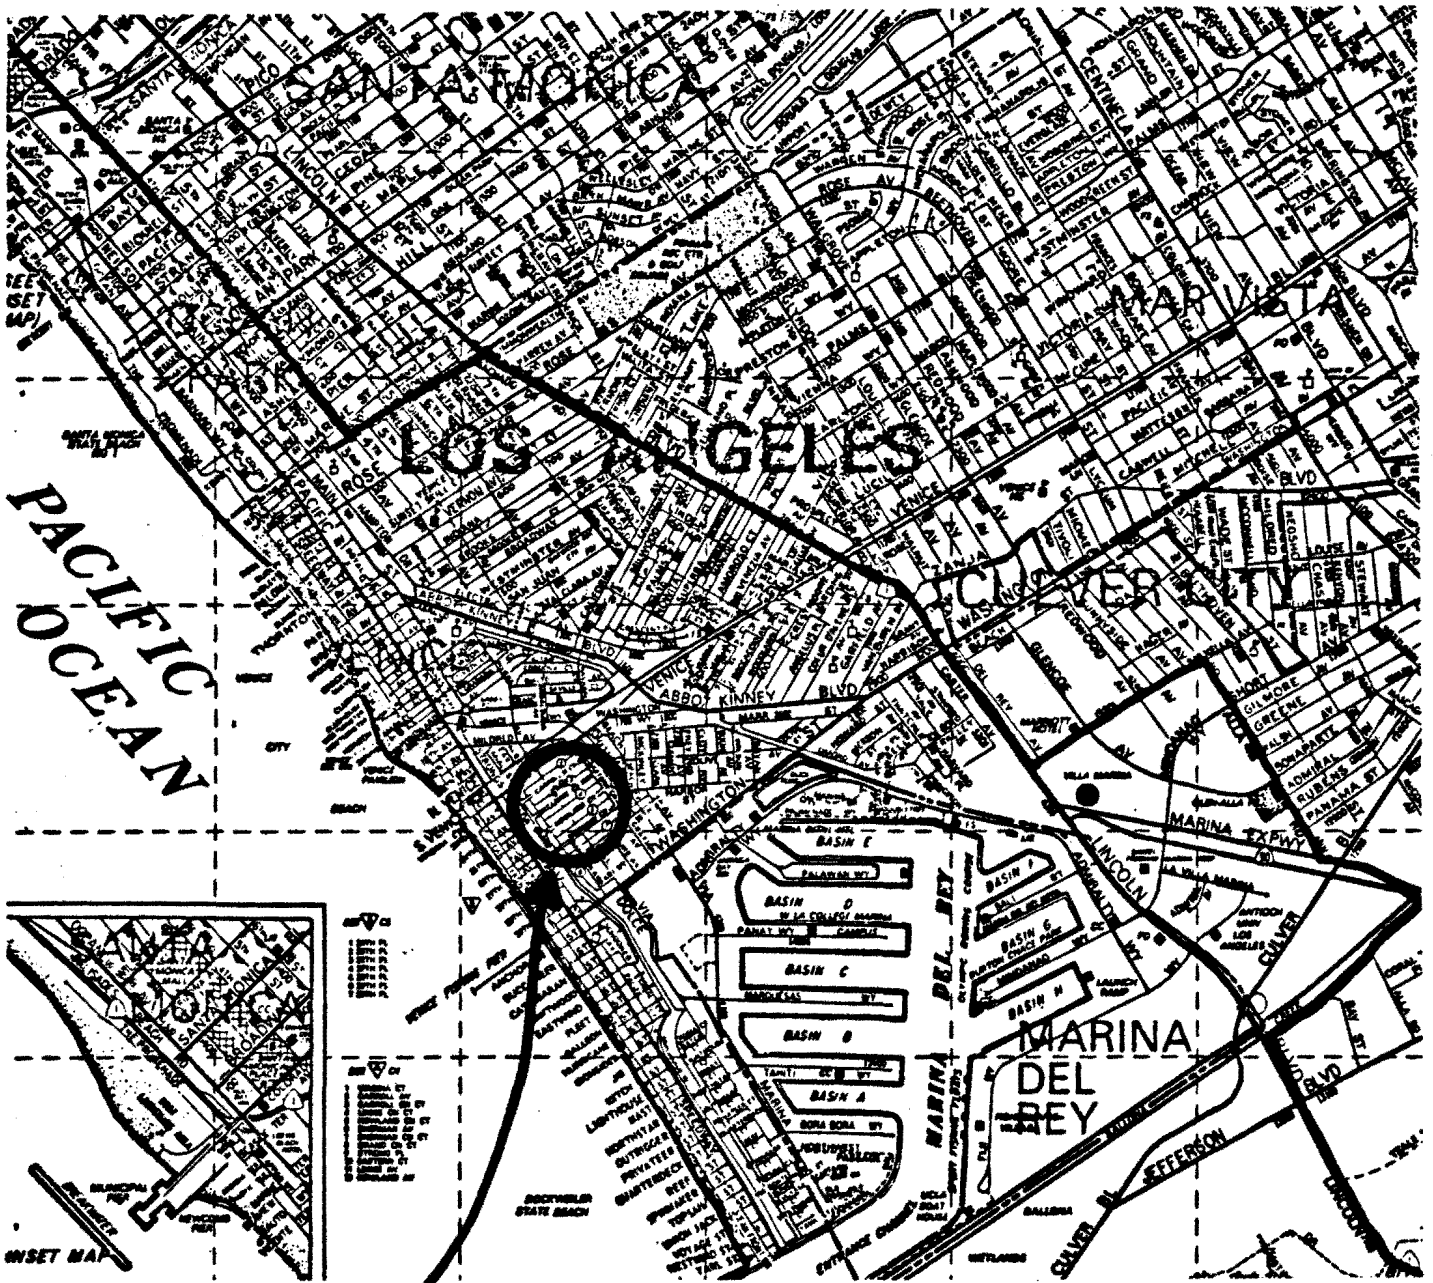

Site

COASTAL COMMISSION



5-97-018

EXHIBIT # 1

PAGE 1 OF 1

4227 11

SCALE 1" = 60'

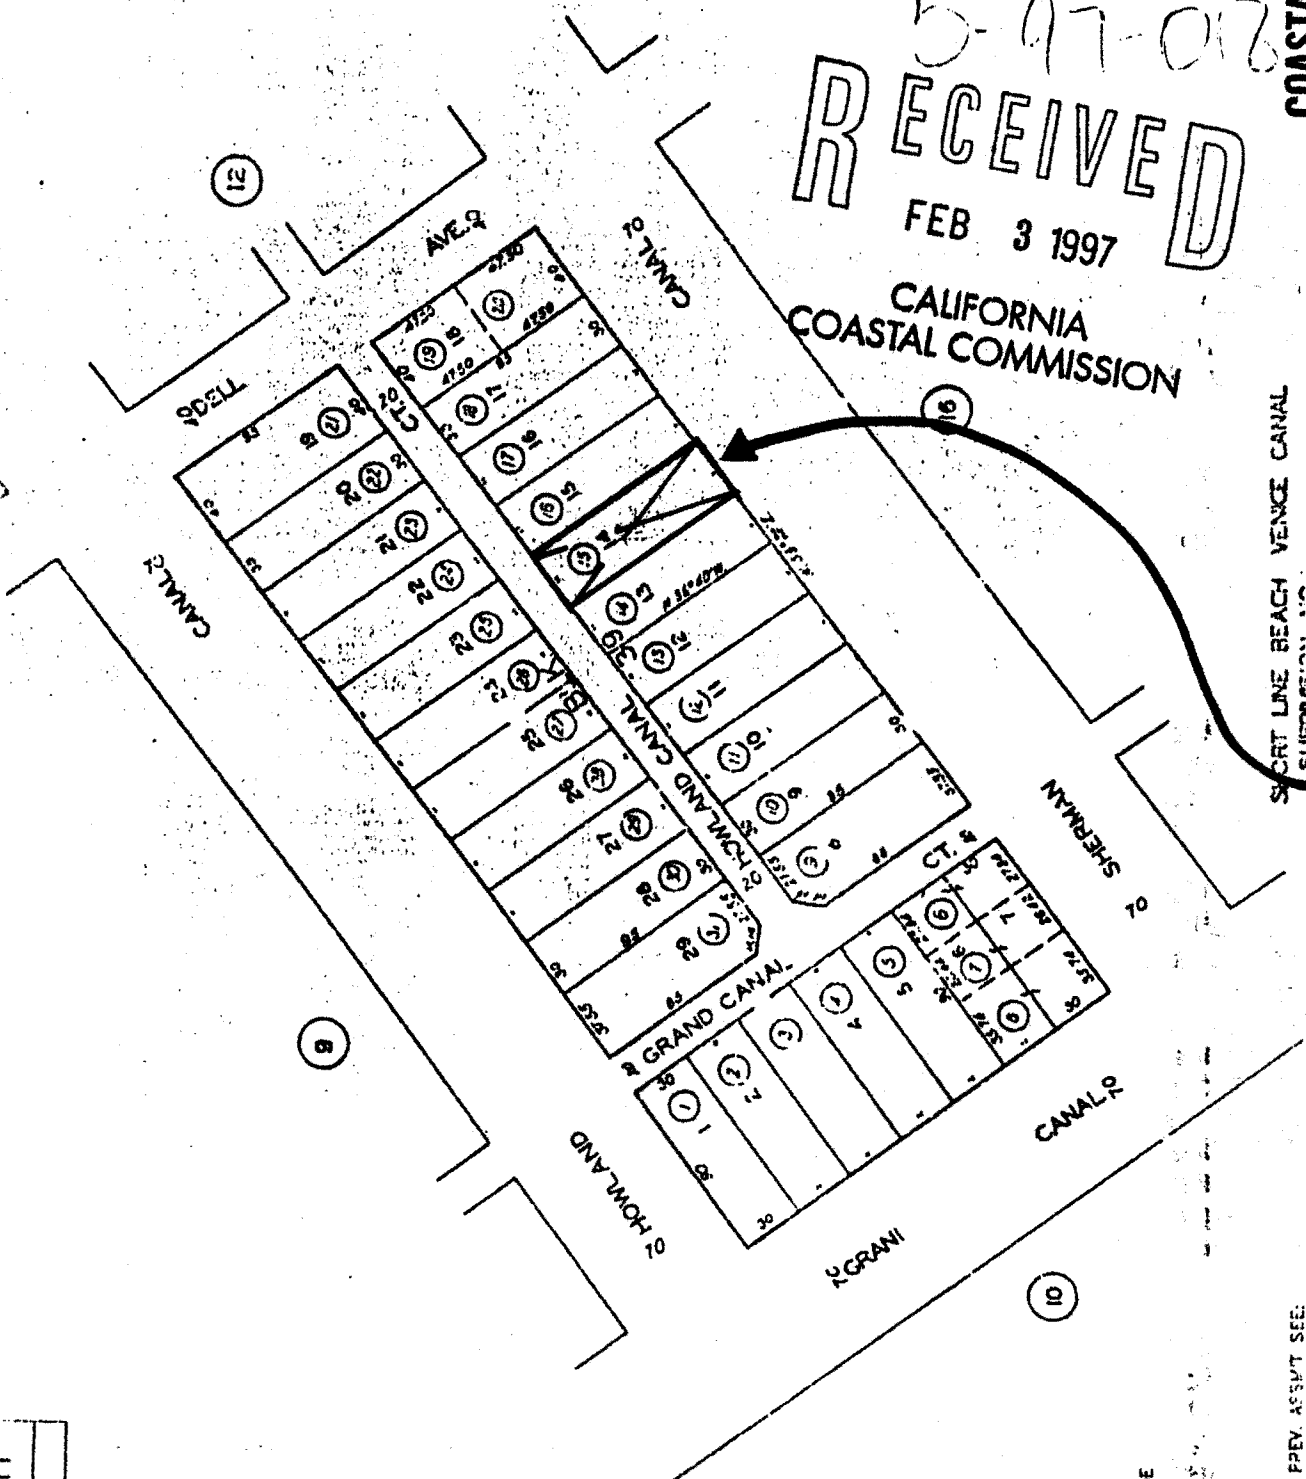

5-97-018
RECEIVED
 FEB 3 1997
 CALIFORNIA
 COASTAL COMMISSION


COASTAL COMMISSION
 5-97-018
 EXHIBIT # 2
 PAGE 1

SHORT LINE BEACH VENCE CANAL

Site


CODE 67

FOR PREV. ASS'VT SEE: 78-23

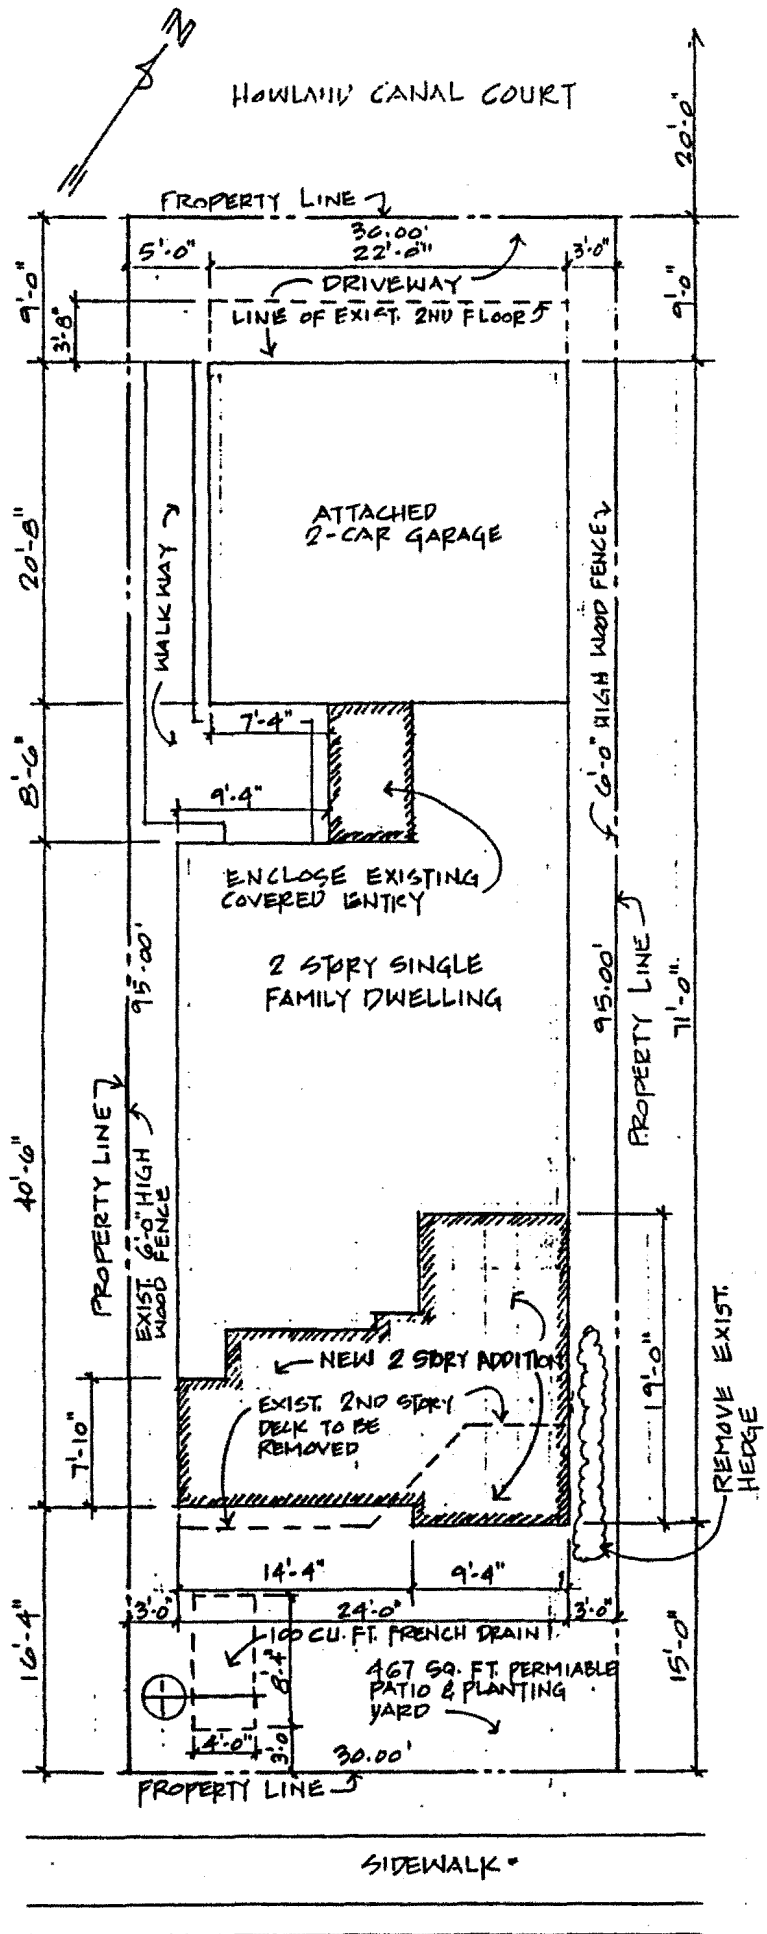

COASTAL COMMISSION
5-97-018

EXHIBIT # 3
PAGE 1 OF 1

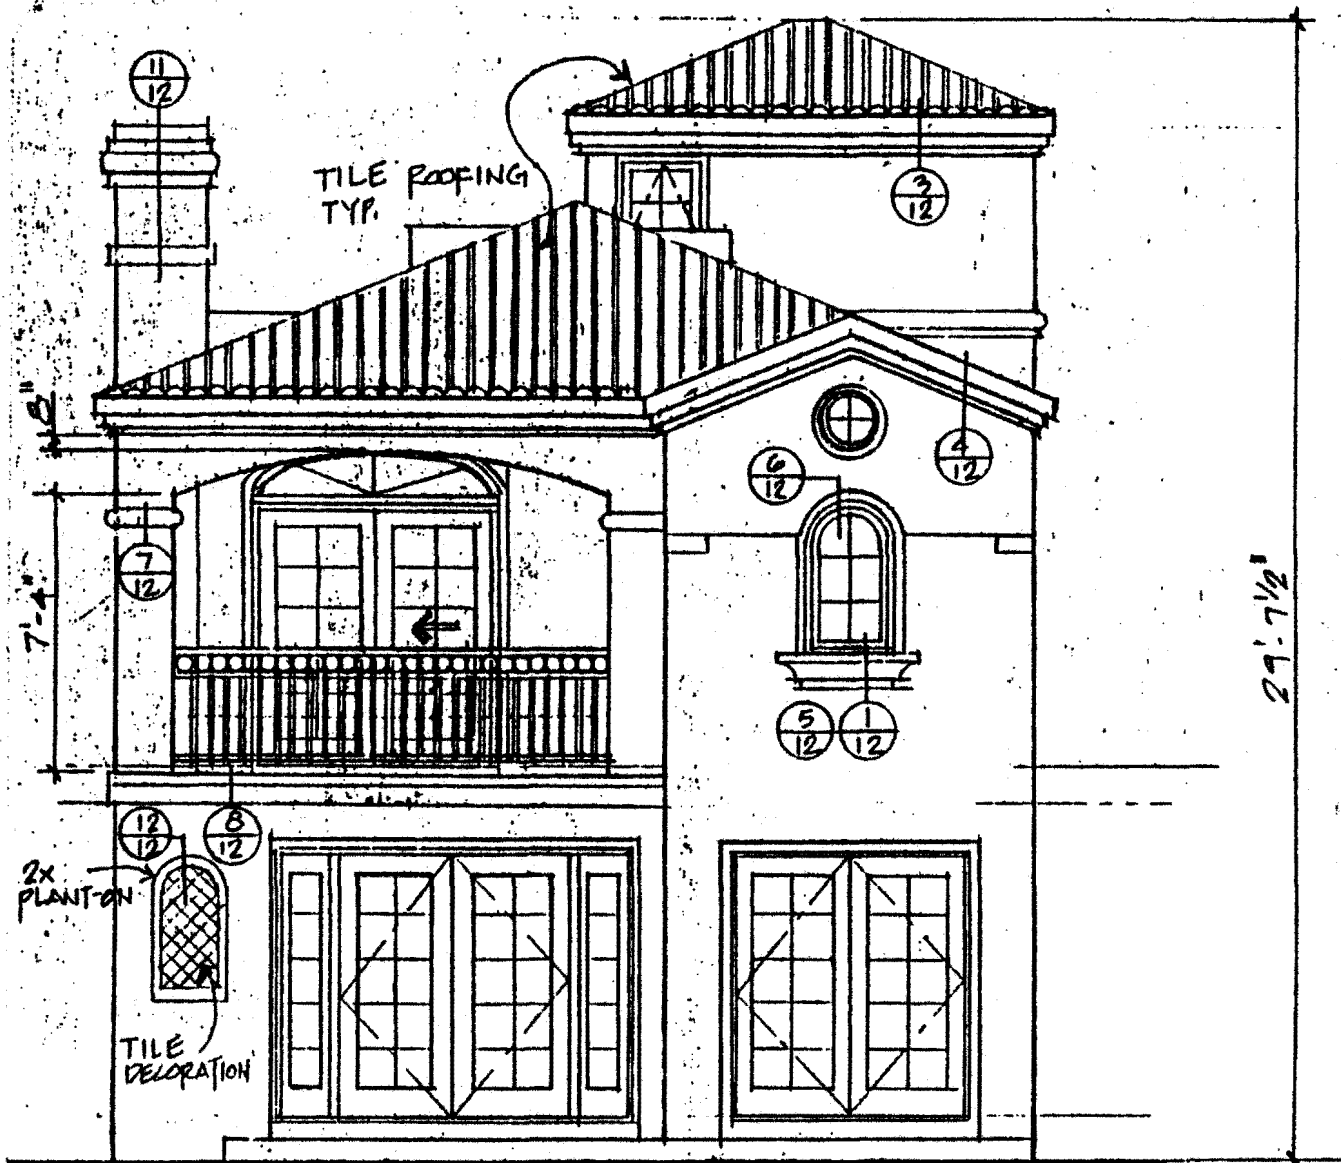

FRONT ELEVATION (SOUTH) $\frac{1}{4}'' = 1'-0''$

COASTAL COMMISSION
 5-97-018
 EXHIBIT # 4
 PAGE 1 OF 1